



SIRIUS soft starter 200-480 V 18 A, 110-250 V AC spring-type terminals  
Thermistor input

**product brand name**  
**product category**  
**product designation**  
**product type designation**  
**manufacturer's article number**

- of standard HMI module usable
- of high feature HMI module usable
- of communication module PROFINET standard usable
- of communication module PROFIBUS usable
- of communication module Modbus TCP usable
- of communication module Modbus RTU usable
- of communication module Ethernet/IP
- of circuit breaker usable at 400 V
- of circuit breaker usable at 500 V
- of circuit breaker usable at 400 V at inside-delta circuit
- of circuit breaker usable at 500 V at inside-delta circuit
- of the gG fuse usable up to 690 V
- of the gG fuse usable at inside-delta circuit up to 500 V
- of full range R fuse link for semiconductor protection usable up to 690 V
- of back-up R fuse link for semiconductor protection usable up to 690 V

SIRIUS  
Hybrid switching devices  
Soft starter  
3RW52

[3RW5980-0HS00](#)  
[3RW5980-0HF00](#)  
[3RW5980-0CS00](#)

[3RW5980-0CP00](#)  
[3RW5980-0CT00](#)  
[3RW5980-0CR00](#)  
[3RW5980-0CE00](#)

[3RV2032-4DA10](#); Type of coordination 1, I<sub>q</sub> = 65 kA, CLASS 10

[3RV2032-4DA10](#); Type of coordination 1, I<sub>q</sub> = 15 kA, CLASS 10

[3RV2032-4EA10](#); Type of coordination 1, I<sub>q</sub> = 65 kA, CLASS 10

[3RV2032-4EA10](#); Type of coordination 1, I<sub>q</sub> = 15 kA, CLASS 10

[3NA3820-6](#); Type of coordination 1, I<sub>q</sub> = 65 kA

[3NA3820-6](#); Type of coordination 1, I<sub>q</sub> = 65 kA

[3NE1802-0](#); Type of coordination 2, I<sub>q</sub> = 65 kA

[3NE8020-1](#); Type of coordination 2, I<sub>q</sub> = 65 kA

### General technical data

<b>starting voltage [%]</b>	30 ... 100 %
<b>stopping voltage [%]</b>	50 %; non-adjustable
<b>start-up ramp time of soft starter</b>	0 ... 20 s
<b>current limiting value [%] adjustable</b>	130 ... 700 %
<b>certificate of suitability</b>	
• CE marking	Yes
• UL approval	Yes
• CSA approval	Yes
<b>product component</b>	
• HMI-High Feature	No
• is supported HMI-Standard	Yes
• is supported HMI-High Feature	Yes
<b>product feature integrated bypass contact system</b>	Yes
<b>number of controlled phases</b>	3
<b>trip class</b>	CLASS 10A (default) / 10E / 20E; acc. to IEC 60947-4-2
<b>buffering time in the event of power failure</b>	

<ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for control circuit</li> </ul>	100 ms
<b>insulation voltage rated value</b>	100 ms
<b>degree of pollution</b>	600 V
<b>impulse voltage rated value</b>	3, acc. to IEC 60947-4-2
<b>blocking voltage of the thyristor maximum</b>	6 kV
<b>service factor</b>	1 600 V
<b>surge voltage resistance rated value</b>	1
<b>maximum permissible voltage for safe isolation</b>	6 kV
<ul style="list-style-type: none"> <li>• between main and auxiliary circuit</li> </ul>	600 V
<b>shock resistance</b>	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting
<b>vibration resistance</b>	15 mm to 6 Hz; 2g to 500 Hz
utilization category according to IEC 60947-4-2	AC 53a
<b>reference code according to IEC 81346-2</b>	Q
<b>Substance Prohibitance (Date)</b>	02/15/2018
<b>product function</b>	
<ul style="list-style-type: none"> <li>• ramp-up (soft starting)</li> <li>• ramp-down (soft stop)</li> <li>• Soft Torque</li> <li>• adjustable current limitation</li> <li>• pump ramp down</li> <li>• intrinsic device protection</li> <li>• motor overload protection</li> </ul>	Yes
	Yes
	Yes
	Yes
	Yes
	Yes
	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)
	Yes; Type A PTC or Klixon / Thermoclick
<ul style="list-style-type: none"> <li>• evaluation of thermistor motor protection</li> <li>• inside-delta circuit</li> <li>• auto-RESET</li> <li>• manual RESET</li> <li>• remote reset</li> <li>• communication function</li> <li>• operating measured value display</li> <li>• error logbook</li> <li>• via software parameterizable</li> <li>• via software configurable</li> <li>• <b>PROFInergy</b></li> </ul>	Yes
	Yes
	Yes
	Yes
	Yes; By turning off the control supply voltage
	Yes
	Yes; Only in conjunction with special accessories
	Yes; Only in conjunction with special accessories
	No
	Yes
	Yes; in connection with the PROFINET Standard communication module
	Yes
	Yes
	No
	No

## Power Electronics

<b>operational current</b>	
<ul style="list-style-type: none"> <li>• at 40 °C rated value</li> <li>• at 50 °C rated value</li> <li>• at 60 °C rated value</li> </ul>	18 A
	15.9 A
	13.8 A
<b>operational current at inside-delta circuit</b>	
<ul style="list-style-type: none"> <li>• at 40 °C rated value</li> <li>• at 50 °C rated value</li> <li>• at 60 °C rated value</li> </ul>	31.5 A
	28 A
	23.9 A
<b>operating voltage</b>	
<ul style="list-style-type: none"> <li>• rated value</li> <li>• at inside-delta circuit rated value</li> </ul>	200 ... 480 V
	200 ... 480 V
<b>relative negative tolerance of the operating voltage</b>	-15 %
<b>relative positive tolerance of the operating voltage</b>	10 %
<b>relative negative tolerance of the operating voltage at inside-delta circuit</b>	-15 %
<b>relative positive tolerance of the operating voltage at inside-delta circuit</b>	10 %
<b>operating power for 3-phase motors</b>	
<ul style="list-style-type: none"> <li>• at 230 V at 40 °C rated value</li> <li>• at 230 V at inside-delta circuit at 40 °C rated value</li> <li>• at 400 V at 40 °C rated value</li> <li>• at 400 V at inside-delta circuit at 40 °C rated value</li> </ul>	4 kW
	7.5 kW
	7.5 kW
	15 kW
<b>Operating frequency 1 rated value</b>	50 Hz

<b>Operating frequency 2 rated value</b>	60 Hz
<b>relative negative tolerance of the operating frequency</b>	-10 %
<b>relative positive tolerance of the operating frequency</b>	10 %
<b>adjustable motor current</b>	
• at rotary coding switch on switch position 1	7.5 A
• at rotary coding switch on switch position 2	8.2 A
• at rotary coding switch on switch position 3	8.9 A
• at rotary coding switch on switch position 4	9.6 A
• at rotary coding switch on switch position 5	10.3 A
• at rotary coding switch on switch position 6	11 A
• at rotary coding switch on switch position 7	11.7 A
• at rotary coding switch on switch position 8	12.4 A
• at rotary coding switch on switch position 9	13.1 A
• at rotary coding switch on switch position 10	13.8 A
• at rotary coding switch on switch position 11	14.5 A
• at rotary coding switch on switch position 12	15.2 A
• at rotary coding switch on switch position 13	15.9 A
• at rotary coding switch on switch position 14	16.6 A
• at rotary coding switch on switch position 15	17.3 A
• at rotary coding switch on switch position 16	18 A
• minimum	7.5 A
<b>adjustable motor current</b>	
• for inside-delta circuit at rotary coding switch on switch position 1	13 A
• for inside-delta circuit at rotary coding switch on switch position 2	14.2 A
• for inside-delta circuit at rotary coding switch on switch position 3	15.4 A
• for inside-delta circuit at rotary coding switch on switch position 4	16.6 A
• for inside-delta circuit at rotary coding switch on switch position 5	17.8 A
• for inside-delta circuit at rotary coding switch on switch position 6	19.1 A
• for inside-delta circuit at rotary coding switch on switch position 7	20.3 A
• for inside-delta circuit at rotary coding switch on switch position 8	21.5 A
• for inside-delta circuit at rotary coding switch on switch position 9	22.7 A
• for inside-delta circuit at rotary coding switch on switch position 10	23.9 A
• for inside-delta circuit at rotary coding switch on switch position 11	25.1 A
• for inside-delta circuit at rotary coding switch on switch position 12	26.3 A
• for inside-delta circuit at rotary coding switch on switch position 13	27.5 A
• for inside-delta circuit at rotary coding switch on switch position 14	28.8 A
• for inside-delta circuit at rotary coding switch on switch position 15	30 A
• for inside-delta circuit at rotary coding switch on switch position 16	31.2 A
• at inside-delta circuit minimum	13 A
<b>minimum load [%]</b>	15 %; Relative to smallest settable I <sub>e</sub>
<b>power loss [W] for rated value of the current at AC</b>	
• at 40 °C after startup	17 W
• at 50 °C after startup	17 W
• at 60 °C after startup	16 W
<b>power loss [W] at AC at current limitation 350 %</b>	
• at 40 °C during startup	276 W
• at 50 °C during startup	241 W
• at 60 °C during startup	200 W

**Control circuit/ Control**

<b>type of voltage of the control supply voltage</b>	AC
<b>control supply voltage at AC</b>	

<ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>	110 ... 250 V
<b>relative negative tolerance of the control supply voltage at AC at 50 Hz</b>	110 ... 250 V
<b>relative positive tolerance of the control supply voltage at AC at 50 Hz</b>	-15 %
<b>relative negative tolerance of the control supply voltage at AC at 60 Hz</b>	10 %
<b>relative positive tolerance of the control supply voltage at AC at 60 Hz</b>	-15 %
<b>control supply voltage frequency</b>	10 %
<b>relative negative tolerance of the control supply voltage frequency</b>	50 ... 60 Hz
<b>relative positive tolerance of the control supply voltage frequency</b>	-10 %
<b>control supply current in standby mode rated value</b>	10 %
<b>holding current in bypass operation rated value</b>	30 mA
<b>inrush current peak at application of control supply voltage maximum</b>	75 mA
<b>duration of inrush current peak at application of control supply voltage</b>	12.2 A
<b>design of the overvoltage protection</b>	2.2 ms
<b>design of short-circuit protection for control circuit</b>	Varistor
	4 A gG fuse (I <sub>cu</sub> =1 kA), 6 A quick-acting fuse (I <sub>cu</sub> =1 kA), C1 miniature circuit breaker (I <sub>cu</sub> = 600 A), C6 miniature circuit breaker (I <sub>cu</sub> = 300 A); Is not part of scope of supply

### Inputs/ Outputs

<b>number of digital inputs</b>	1
<b>number of digital outputs</b>	3
<ul style="list-style-type: none"> <li>• not parameterizable</li> </ul>	2
<b>digital output version</b>	2 normally-open contacts (NO) / 1 changeover contact (CO)
<b>number of analog outputs</b>	0
<b>switching capacity current of the relay outputs</b>	
<ul style="list-style-type: none"> <li>• at AC-15 at 250 V rated value</li> <li>• at DC-13 at 24 V rated value</li> </ul>	3 A
	1 A

### Installation/ mounting/ dimensions

<b>mounting position</b>	+/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface
<b>fastening method</b>	screw fixing
<b>height</b>	275 mm
<b>width</b>	170 mm
<b>depth</b>	152 mm
<b>required spacing with side-by-side mounting</b>	
<ul style="list-style-type: none"> <li>• forwards</li> <li>• backwards</li> <li>• upwards</li> <li>• downwards</li> <li>• at the side</li> </ul>	10 mm
	0 mm
	100 mm
	75 mm
	5 mm
<b>weight without packaging</b>	2.1 kg

### Connections/ Terminals

<b>type of electrical connection</b>	
<ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for control circuit</li> </ul>	screw-type terminals spring-loaded terminals
<b>wire length for thermistor connection</b>	
<ul style="list-style-type: none"> <li>• with conductor cross-section = 0.5 mm<sup>2</sup> maximum</li> <li>• with conductor cross-section = 1.5 mm<sup>2</sup> maximum</li> <li>• with conductor cross-section = 2.5 mm<sup>2</sup> maximum</li> </ul>	50 m 150 m 250 m
<b>type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG cables for main current circuit solid</li> </ul>	2x (1.0 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 10 mm <sup>2</sup> ) 2x (1.0 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6.0 mm <sup>2</sup> ) 2x (16 ... 12), 2x (14 ... 8)
<b>type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>• for control circuit solid</li> <li>• for control circuit finely stranded with core end processing</li> </ul>	2x (0.25 ... 1.5 mm <sup>2</sup> ) 2x (0.25 ... 1.5 mm <sup>2</sup> )

<ul style="list-style-type: none"> <li>• at AWG cables for control circuit solid</li> <li>• at AWG cables for control circuit finely stranded with core end processing</li> </ul>	<p>2x (24 ... 16)</p> <p>2x (24 ... 16)</p>
<b>wire length</b> <ul style="list-style-type: none"> <li>• between soft starter and motor maximum</li> <li>• at the digital inputs at AC maximum</li> </ul>	<p>800 m</p> <p>100 m</p>
<b>tightening torque</b> <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> <li>• for auxiliary and control contacts with screw-type terminals</li> </ul>	<p>2 ... 2.5 N·m</p> <p>0.8 ... 1.2 N·m</p>
<b>tightening torque [lbf·in]</b> <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> <li>• for auxiliary and control contacts with screw-type terminals</li> </ul>	<p>18 ... 22 lbf·in</p> <p>7 ... 10.3 lbf·in</p>
<b>Ambient conditions</b>	
installation altitude at height above sea level maximum <b>ambient temperature</b> <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage and transport</li> </ul> <b>environmental category</b> <ul style="list-style-type: none"> <li>• during operation according to IEC 60721</li> <li>• during storage according to IEC 60721</li> <li>• during transport according to IEC 60721</li> </ul> <b>EMC emitted interference</b>	<p>5 000 m; Derating as of 1000 m, see catalog</p> <p>-25 ... +60 °C; Please observe derating at temperatures of 40 °C or above</p> <p>-40 ... +80 °C</p> <p>3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6</p> <p>1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4</p> <p>2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)</p> <p>acc. to IEC 60947-4-2: Class A</p>
<b>Communication/ Protocol</b>	
<b>communication module is supported</b> <ul style="list-style-type: none"> <li>• PROFINET standard</li> <li>• EtherNet/IP</li> <li>• Modbus RTU</li> <li>• Modbus TCP</li> <li>• PROFIBUS</li> </ul>	<p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p>
<b>UL/CSA ratings</b>	
<b>manufacturer's article number</b> <ul style="list-style-type: none"> <li>• <b>of circuit breaker</b> <ul style="list-style-type: none"> <li>— usable for Standard Faults at 460/480 V according to UL</li> <li>— usable for High Faults at 460/480 V according to UL</li> <li>— usable for Standard Faults at 460/480 V at inside-delta circuit according to UL</li> <li>— usable for High Faults at 460/480 V at inside-delta circuit according to UL</li> <li>— usable for Standard Faults at 575/600 V according to UL</li> <li>— usable for Standard Faults at 575/600 V at inside-delta circuit according to UL</li> </ul> </li> <li>• <b>of the fuse</b> <ul style="list-style-type: none"> <li>— usable for Standard Faults up to 575/600 V according to UL</li> <li>— usable for High Faults up to 575/600 V according to UL</li> <li>— usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL</li> <li>— usable for High Faults at inside-delta circuit up to 575/600 V according to UL</li> </ul> </li> </ul> <b>operating power [hp] for 3-phase motors</b> <ul style="list-style-type: none"> <li>• at 200/208 V at 50 °C rated value</li> <li>• at 220/230 V at 50 °C rated value</li> <li>• at 460/480 V at 50 °C rated value</li> <li>• at 200/208 V at inside-delta circuit at 50 °C rated value</li> <li>• at 220/230 V at inside-delta circuit at 50 °C rated value</li> <li>• at 460/480 V at inside-delta circuit at 50 °C rated</li> </ul>	<p>Siemens type: 3RV2742, max. 60 A or 3VA51, max. 60 A; Iq = 5 kA</p> <p>Siemens type: 3RV2742, max. 30 A or 3VA51, max. 35 A; Iq max = 65 kA</p> <p>Siemens type: 3RV2742, max. 60 A or 3VA51, max. 60 A; Iq = 5 kA</p> <p>Siemens type: 3VA51, max. 35 A; Iq max = 65 kA</p> <p>Siemens type: 3RV2742, max. 60 A or 3VA51, max. 60 A; Iq = 5 kA</p> <p>Siemens type: 3RV2742, max. 60 A or 3VA51, max. 60 A; Iq = 5 kA</p> <p>Type: Class RK5 / K5, max. 70 A; Iq = 5 kA</p> <p>Type: Class J / L, max. 70 A; Iq = 100 kA</p> <p>Type: Class RK5 / K5, max. 70 A; Iq = 5 kA</p> <p>Type: Class J / L, max. 70 A; Iq = 100 kA</p> <p>3 hp</p> <p>5 hp</p> <p>10 hp</p> <p>7.5 hp</p> <p>7.5 hp</p> <p>20 hp</p>

value

contact rating of auxiliary contacts according to UL

R300-B300

#### Safety related data

protection class IP on the front according to IEC 60529

IP20

touch protection on the front according to IEC 60529  
electromagnetic compatibility

finger-safe, for vertical contact from the front  
in accordance with IEC 60947-4-2

#### Certificates/ approvals

General Product Approval

EMC



[Confirmation](#)



Declaration of Conformity

Test Certificates

Marine / Shipping



[Type Test Certificates/Test Report](#)



Marine / Shipping

other



[Confirmation](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5214-3TC14>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5214-3TC14>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5214-3TC14>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW5214-3TC14&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5214-3TC14&lang=en)

Characteristic: Tripping characteristics, I<sup>t</sup>, Let-through current




<https://support.industry.siemens.com/cs/ww/en/ps/3RW5214-3TC14/char>

Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5214-3TC14&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

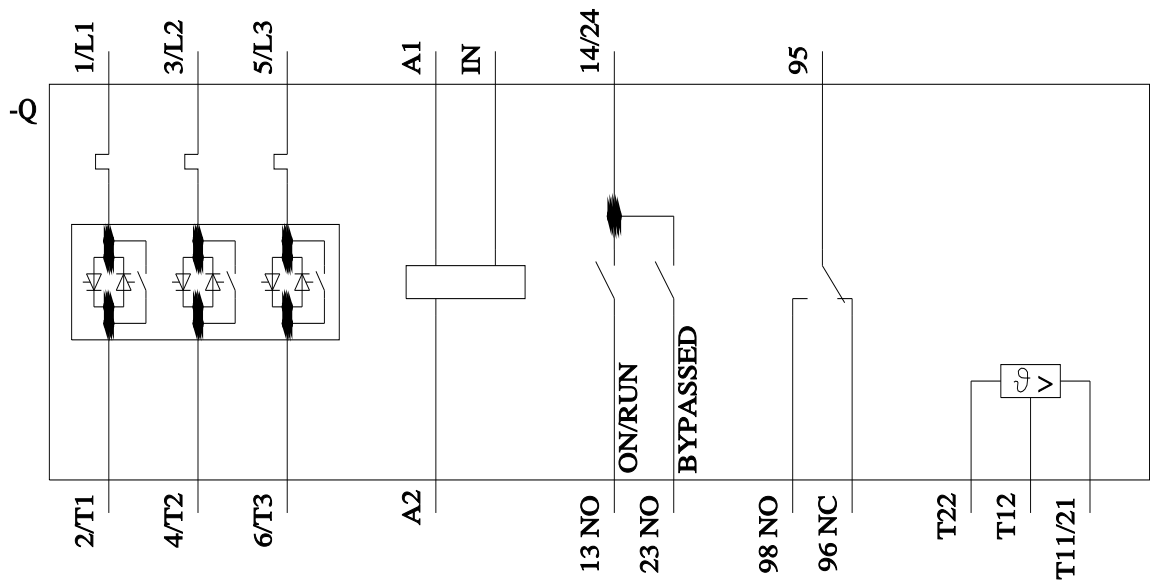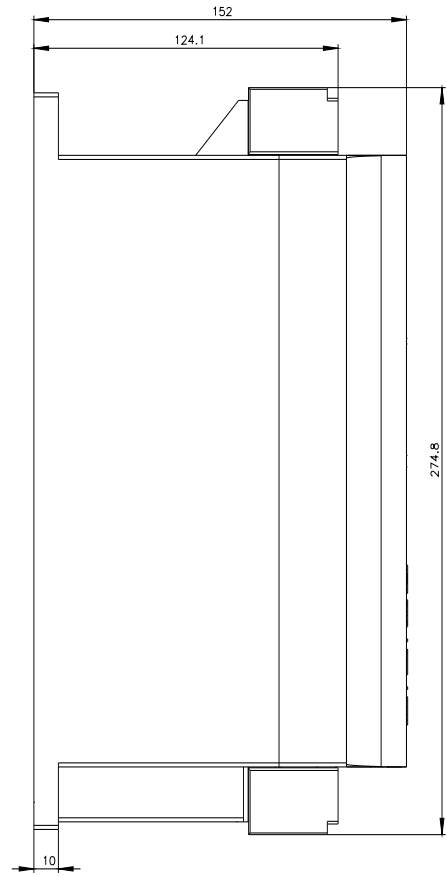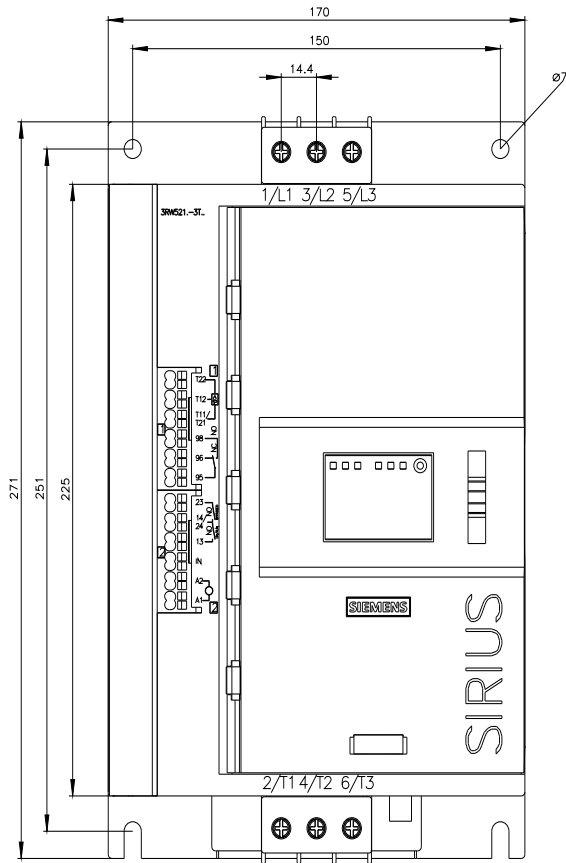





last modified:

9/13/2022 