

SACC-DSI-M12MS-12CON-M12 - Device connector rear mounting



1553488

<https://www.phoenixcontact.com/no/products/1553488>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator flush-type plug, 12-pos., M12, rear/screw mounting with M12 thread, with straight solder connection

Commercial data

Item number	1553488
Packing unit	20 pc
Minimum order quantity	20 pc
Sales key	31BAB
Product key	ABQEGI
GTIN	4046356157278
Weight per piece (including packing)	10.655 g
Weight per piece (excluding packing)	10.655 g
Customs tariff number	85366990
Country of origin	DE

SACC-DSI-M12MS-12CON-M12 - Device connector rear mounting



1553488

<https://www.phoenixcontact.com/no/products/1553488>

Technical data

Mounting

Mounting type	Rear mounting
---------------	---------------

Product properties

Product type	Circular connectors (device side)
Sensor type	Universal
Number of positions	12
Shielded	no
Coding	A
	A
Thread type	M12

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V0
--	----

Electrical properties

Contact resistance	$\leq 3 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	30 V
Nominal current I_N	1.5 A

Connection data

Conductor connection

Connection method	Wave soldering
Contact connection type	Pin

Connector

Connection 1

Head design	Pin
Head cable outlet	straight
Head thread type	M12
Coding	A

Cable/line

Signal type/category	Universal
----------------------	-----------

SACC-DSI-M12MS-12CON-M12 - Device connector rear mounting



1553488

<https://www.phoenixcontact.com/no/products/1553488>

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
	IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug)

Standards and regulations

M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101


SACC-DSI-M12MS-12CON-M12 - Device connector rear mounting

1553488

<https://www.phoenixcontact.com/no/products/1553488>

Drawings

Schematic diagram

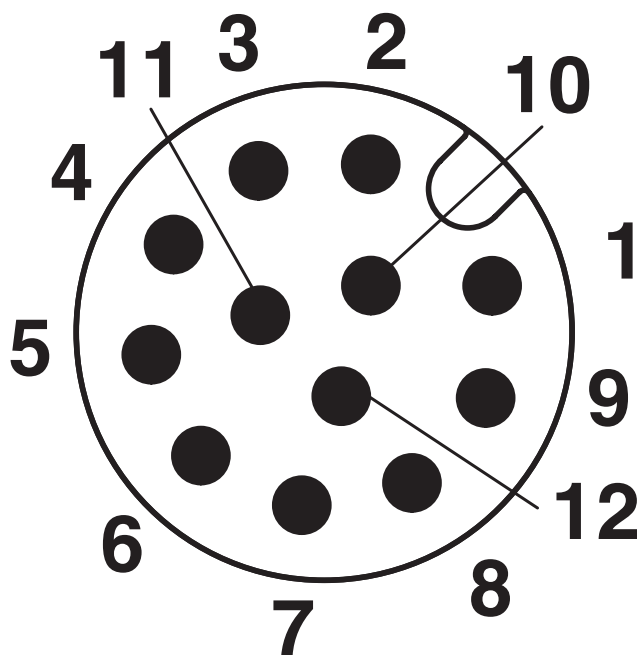

Pin assignment M12 male connector, 12-pos., male side view

SACC-DSI-M12MS-12CON-M12 - Device connector rear mounting





1553488

<https://www.phoenixcontact.com/no/products/1553488>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/no/products/1553488>

 UL Recognized Approval ID: E221474-20070307				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	30 V	1.5 A	-	-

 cUL Recognized Approval ID: E221474-20070307				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	30 V	1.5 A	-	-

cULus Recognized

SACC-DSI-M12MS-12CON-M12 - Device connector rear mounting



1553488

<https://www.phoenixcontact.com/no/products/1553488>

Classifications

ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

ETIM

ETIM 9.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

SACC-DSI-M12MS-12CON-M12 - Device connector rear mounting



1553488

<https://www.phoenixcontact.com/no/products/1553488>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT AS
Strømsveien 344
N-1081 Oslo
+47 22 07 68 00
norge@phoenixcontact.com