

CA-09S1N8A80DN - Cable connector



1619766

<https://www.phoenixcontact.com/za/products/1619766>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: CA, straight, shielded: yes, Screw locking mechanism, No. of pos. : 8+1, Direction of rotation: Standard, contact connection type: Socket, Crimp connection, cable diameter range: 3 mm ... 14.5 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1243818

Your advantages

- Safe use in the field, thanks to high degree of protection
- Connector for flexible on-site assembly
- Consistent EMC protection for reliable transmission of signals
- Crimping connection: vibration- and temperature-resistant assembly

Commercial data

Item number	1619766
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	ABR
Product key	ABRAEA
Catalog page	Page 86 (C-2-2019)
GTIN	4046356821513
Weight per piece (including packing)	90 g
Weight per piece (excluding packing)	90 g
Customs tariff number	85366990
Country of origin	DE

CA-09S1N8A80DN - Cable connector



1619766

<https://www.phoenixcontact.com/za/products/1619766>

Technical data

Notes

Order information:	Order crimp contacts 8 x Ø 1 mm, 1 x Ø 2 mm separately
--------------------	--

Product properties

Product type	Circular connector (cable-side)
--------------	---------------------------------

Data management status

Article revision	05
------------------	----

Connector

Connection 1

Head design	Socket
-------------	--------

Insulating body

Note	Order information: Order crimp contacts 8 x Ø 1 mm, 1 x Ø 2 mm separately
Coding	N
Insulation body material	PA 6.6
Connection method	Crimp connection
Contact switching type	Socket
Application	Signal
Number of positions	9
Direction of rotation	Standard
Connection profile	8+1
Contact diameter Power contacts	2 mm
Litz wire cross-section Power contacts min.	1 mm ²
Litz wire cross-section Power contacts max.	2.5 mm ²
Rated current Power contacts	20 A
Rated voltage	48 V AC 74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Contact diameter Signal contacts	1 mm
Litz wire cross-section Signal contacts min.	0.08 mm ²
Litz wire cross-section Signal contacts max.	1 mm ²
Nominal current per signal contact	8 A

Housing

Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-
------------------	---

CA-09S1N8A80DN - Cable connector



1619766

<https://www.phoenixcontact.com/za/products/1619766>

	Zn)
Type of locking	Screw locking mechanism
Pg screw connection	none
Degree of protection (plugged in)	IP67
Thread type	M23

Seal

External cable diameter	3 mm ... 14.5 mm
Seal material	NBR

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
Ambient temperature (storage/transport)	15 °C ... 25 °C
Permissible humidity (storage/transport)	50 % ... 65 %

CA-09S1N8A80DN - Cable connector




1619766

<https://www.phoenixcontact.com/za/products/1619766>

Drawings

Schematic diagram

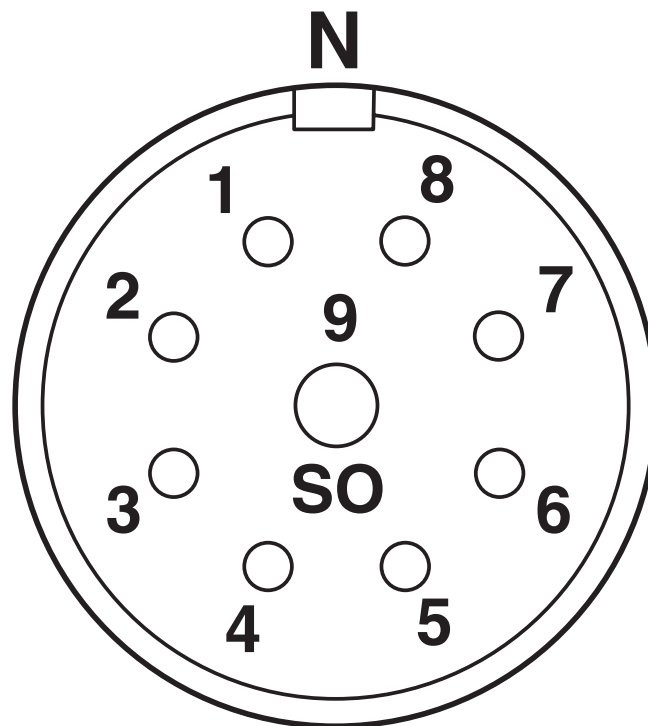

Connector pin assignment

CA-09S1N8A80DN - Cable connector





1619766

<https://www.phoenixcontact.com/za/products/1619766>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/za/products/1619766>

 cUL Recognized Approval ID: E335019-20141210				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Power	48 V	12 A	14 - 14	-
Signal	48 V	4 A	20 - 20	-

 UL Recognized Approval ID: E335019-20141210				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Power	48 V	20 A	14 - 14	-
Signal	48 V	6 A	20 - 20	-

cULus Recognized				
-------------------------	--	--	--	--

CA-09S1N8A80DN - Cable connector



1619766

<https://www.phoenixcontact.com/za/products/1619766>

Classifications

ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

ETIM

ETIM 9.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

CA-09S1N8A80DN - Cable connector



1619766

<https://www.phoenixcontact.com/za/products/1619766>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	c893f762-e629-48da-bc87-9c9e5753322a

CA-09S1N8A80DN - Cable connector

1619766

<https://www.phoenixcontact.com/za/products/1619766>

Accessories

RC-11S2000 - Crimp contact

1596772

<https://www.phoenixcontact.com/za/products/1596772>



Crimp contact, Socket, turned, Single contact, contact diameter: 1 mm, crimp range: 0.08 mm² ... 0.22 mm², Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241093

RC-12S2000 - Crimp contact

1599600

<https://www.phoenixcontact.com/za/products/1599600>



Crimp contact, Socket, turned, Single contact, contact diameter: 1 mm, crimp range: 0.14 mm² ... 0.56 mm², Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241093

CA-09S1N8A80DN - Cable connector

1619766

<https://www.phoenixcontact.com/za/products/1619766>



RC-1KS2000 - Crimp contact

1602998

<https://www.phoenixcontact.com/za/products/1602998>



Crimp contact, Socket, turned, Single contact, contact diameter: 1 mm, crimp range: 0.5 mm² ... 1 mm², Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241572

RC-5CS2000 - Crimp contact

1603517

<https://www.phoenixcontact.com/za/products/1603517>



Crimp contact, Socket, turned, contact diameter: 2 mm, crimp range: 1 mm² ... 1.5 mm², Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241635

CA-09S1N8A80DN - Cable connector

1619766

<https://www.phoenixcontact.com/za/products/1619766>



RC-5AS2000 - Crimp contact

1603509

<https://www.phoenixcontact.com/za/products/1603509>



Crimp contact, Socket, turned, contact diameter: 2 mm, crimp range: 1.5 mm² ... 2.5 mm², Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241635

RC-5SS2000 - Crimp contact

1603530

<https://www.phoenixcontact.com/za/products/1603530>



Crimp contact, Socket, turned, contact diameter: 2 mm, crimp range: 0.5 mm² ... 0.75 mm², Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241633

CA-09S1N8A80DN - Cable connector

1619766

<https://www.phoenixcontact.com/za/products/1619766>



RC-59S2000 - Crimp contact

1603501

<https://www.phoenixcontact.com/za/products/1603501>



Crimp contact, Socket, turned, Single contact, contact diameter: 2 mm, crimp range: 0.75 mm² ... 1 mm², Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241633

CA-Z0077 - Metal protective cap

1627224

<https://www.phoenixcontact.com/za/products/1627224>



Metal protective cap, degree of protection: IP67, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1245447

CA-09S1N8A80DN - Cable connector

1619766

<https://www.phoenixcontact.com/za/products/1619766>



SF-Z0028 - Torque screwdriver

1607456

<https://www.phoenixcontact.com/za/products/1607456>

Torque screwdriver, series: RC, UC, SH, SF



SF-Z0027 - Hook wrench

1607455

<https://www.phoenixcontact.com/za/products/1607455>

Hook wrench, series: RC, UC, RF, SF



CA-09S1N8A80DN - Cable connector



1619766


<https://www.phoenixcontact.com/za/products/1619766>

RF-Z0014 - Color coding

1620588

<https://www.phoenixcontact.com/za/products/1620588>

Color coding, color: green



RF-Z0015 - Color coding

1620592

<https://www.phoenixcontact.com/za/products/1620592>

Color coding, color: orange



CA-09S1N8A80DN - Cable connector

1619766

<https://www.phoenixcontact.com/za/products/1619766>



RF-Z0016 - Color coding

1620593

<https://www.phoenixcontact.com/za/products/1620593>

Color coding, color: black



RF-Z0003 - Square mounting flange

1607905

<https://www.phoenixcontact.com/za/products/1607905>



Square mounting flange, Axial seal, 4xM3, flange dimensions: 35 mm x 35 mm, series: RF, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242369

CA-09S1N8A80DN - Cable connector

1619766

<https://www.phoenixcontact.com/za/products/1619766>



PROT-M23-SG-IT-IP20 - Plastic protective cap

1577206

<https://www.phoenixcontact.com/za/products/1577206>



Plastic protective cap, M23, degree of protection: IP20, series: CA, RC, RF, UC, RM

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (Pty) Ltd.

36 Lyn Road P.O. Box 916 ZA-Ferndale 2160

+27/11/801-8200

info@phoenixcontact.co.za