

# CA-07P1N8A9007 - Coupler connector



1620080

<https://www.phoenixcontact.com/za/products/1620080>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Coupler connector, series: CA, straight, shielded: yes, for standard and SPEEDCON interlock, No. of pos.: 7, Direction of rotation: Standard, contact connection type: Pin, Crimp connection, cable diameter range: 6 mm ... 10 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1244002

## Your advantages

- Safe use in the field, thanks to high degree of protection
- Connector for flexible on-site assembly
- Consistent EMC protection for reliable transmission of signals
- Crimping connection: vibration- and temperature-resistant assembly

## Commercial data

Item number	1620080
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	ABR
Product key	ABRAEG
Catalog page	Page 88 (C-2-2019)
GTIN	4046356819329
Weight per piece (including packing)	93,1 g
Weight per piece (excluding packing)	89,4 g
Customs tariff number	85366990
Country of origin	DE

# CA-07P1N8A9007 - Coupler connector



1620080

<https://www.phoenixcontact.com/za/products/1620080>

## Technical data

### Product properties

Product type	Circular connector (cable-side)
Data management status	
Article revision	04

### Connector

#### Insulating body

Note	Order information: Order 7 x Ø 2 mm crimp contacts separately
Coding	N
Insulation body material	PA 6.6
Connection method	Crimp connection
Contact switching type	Pin
Application	Signal
Number of positions	7
Direction of rotation	Standard
Connection profile	7
Contact diameter	2 mm
Litz wire cross-section	Signal contacts min. 1 mm <sup>2</sup>
Litz wire cross-section	Signal contacts max. 2.5 mm <sup>2</sup>
Nominal current per signal contact	20 A
Rated voltage	Signal contact 48 V AC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3

#### Housing

Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Type of locking	for standard and SPEEDCON interlock
Pg screw connection	none
Degree of protection (plugged in)	IP67
Thread type	M23

#### Seal

External cable diameter	6 mm ... 10 mm
Seal material	NBR

### Environmental and real-life conditions

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

# CA-07P1N8A9007 - Coupler connector



1620080

<https://www.phoenixcontact.com/za/products/1620080>

Ambient temperature (storage/transport)	15 °C ... 25 °C
Permissible humidity (storage/transport)	50 % ... 65 %


# CA-07P1N8A9007 - Coupler connector

1620080

<https://www.phoenixcontact.com/za/products/1620080>

## Drawings

Schematic diagram

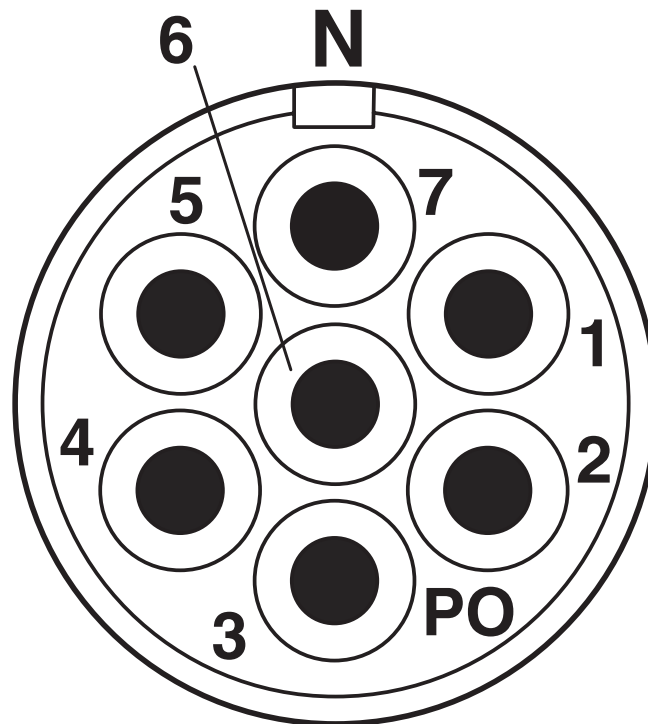

Connector pin assignment

# CA-07P1N8A9007 - Coupler connector





1620080

<https://www.phoenixcontact.com/za/products/1620080>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/za/products/1620080>

 <b>cUL Recognized</b> Approval ID: E335019-20141210				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	48 V	10 A	14 - 14	-

 <b>UL Recognized</b> Approval ID: E335019-20141210				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	48 V	17 A	14 - 14	-

<b>cULus Recognized</b>				
-------------------------	--	--	--	--

# CA-07P1N8A9007 - Coupler connector



1620080

<https://www.phoenixcontact.com/za/products/1620080>

## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# CA-07P1N8A9007 - Coupler connector



1620080

<https://www.phoenixcontact.com/za/products/1620080>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	bbb30df6-7693-4968-88f8-9e96e13c8039

# CA-07P1N8A9007 - Coupler connector

1620080

<https://www.phoenixcontact.com/za/products/1620080>

## Accessories

### SF-Z0019 - Protective cap

1607449

<https://www.phoenixcontact.com/za/products/1607449>



Plastic protection cap, with eye, IP40 for connectors with M23 external thread, RF, SF series

---

### RC-Z2469 - Protective cap

1611797

<https://www.phoenixcontact.com/za/products/1611797>



Plastic protection cap, antistatic, for RF, SF, CA, RC series connectors, with M23 external thread



# CA-07P1N8A9007 - Coupler connector

1620080

<https://www.phoenixcontact.com/za/products/1620080>

## RC-Z2104 - Metal protective cap

1604260

<https://www.phoenixcontact.com/za/products/1604260>



Metal protective cap, M23, degree of protection: IP67, series: RC, UC, RF, SF, NC, RM, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241739

---

## RC-Z2068 - Metal protective cap

1604236

<https://www.phoenixcontact.com/za/products/1604236>



Metal protective cap, M23, degree of protection: IP67, series: RC, UC, RF, SF, NC, RM, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241735

# CA-07P1N8A9007 - Coupler connector

1620080

<https://www.phoenixcontact.com/za/products/1620080>

## RF-Z0014 - Color coding

1620588

<https://www.phoenixcontact.com/za/products/1620588>

Color coding, color: green



---

## RF-Z0015 - Color coding

1620592

<https://www.phoenixcontact.com/za/products/1620592>

Color coding, color: orange



# CA-07P1N8A9007 - Coupler connector

1620080

<https://www.phoenixcontact.com/za/products/1620080>



## RF-Z0016 - Color coding

1620593

<https://www.phoenixcontact.com/za/products/1620593>

Color coding, color: black



---

## RC-5AP2000 - Crimp contact

1603505

<https://www.phoenixcontact.com/za/products/1603505>



Crimp contact, Pin, turned, contact diameter: 2 mm, crimp range: 1.5 mm<sup>2</sup> ... 2.5 mm<sup>2</sup>, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241634

# CA-07P1N8A9007 - Coupler connector

1620080

<https://www.phoenixcontact.com/za/products/1620080>



## RC-5CP2000 - Crimp contact

1603513

<https://www.phoenixcontact.com/za/products/1603513>



Crimp contact, Pin, turned, contact diameter: 2 mm, crimp range: 1 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241634

---

## RF-Z0003 - Square mounting flange

1607905

<https://www.phoenixcontact.com/za/products/1607905>



Square mounting flange, Axial seal, 4xM3, flange dimensions: 35 mm x 35 mm, series: RF, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242369

# CA-07P1N8A9007 - Coupler connector

1620080

<https://www.phoenixcontact.com/za/products/1620080>



## RF-Z0007 - Special wrench

1614347

<https://www.phoenixcontact.com/za/products/1614347>

Special wrench, series: RF



---

## RC-5SP2000 - Crimp contact

1603529

<https://www.phoenixcontact.com/za/products/1603529>



Crimp contact, Pin, turned, contact diameter: 2 mm, crimp range: 0.5 mm<sup>2</sup> ... 0.75 mm<sup>2</sup>, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241632

# CA-07P1N8A9007 - Coupler connector

1620080

<https://www.phoenixcontact.com/za/products/1620080>



## PROT-M23PRO-OT-IP20 - Plastic protective cap

1055753

<https://www.phoenixcontact.com/za/products/1055753>

Plastic protective cap, M23, degree of protection: IP20, series: M23 PRO



---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (Pty) Ltd.

36 Lyn Road P.O. Box 916 ZA-Ferndale 2160

+27/11/801-8200

[info@phoenixcontact.co.za](mailto:info@phoenixcontact.co.za)