

REL-OR/LDP-220DC/1 - Single relay



2901910

<https://www.phoenixcontact.com/us/products/2901910>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug-in octal relay with power contacts, specially designed for switching high DC loads, 1 N/O contact, detectable manual operation, status LED, coil voltage: 220 V DC

Commercial data

Item number	2901910
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	C460
Product key	CK6193
Catalog page	Page 386 (C-7-2013)
GTIN	4046356667517
Weight per piece (including packing)	88.44 g
Weight per piece (excluding packing)	88.44 g
Customs tariff number	85364900
Country of origin	IN

REL-OR/LDP-220DC/1 - Single relay



2901910

<https://www.phoenixcontact.com/us/products/2901910>

Technical data

Product properties

Product type	Single relay
Operating mode	100% operating factor
Mechanical service life	approx. 10^7 cycles

Insulation characteristics

Overvoltage category	III
Pollution degree	3

Electrical properties

Maximum power dissipation for nominal condition	1.54 W
Test voltage (Winding/contact)	2.5 kV _{rms} (50 Hz, 1 min., winding/contact)

Input data

Coil side

Nominal input voltage U_N	220 V DC
Input voltage range	143 V DC ... 330 V DC
Input voltage range in reference to U_N	see diagram
Typical input current at U_N	7 mA
Typical response time	20 ms
Typical release time	30 ms
Protective circuit	Freewheeling diode
Operating voltage display	Yellow LED
Coil resistance	36.1 k Ω \pm 10 %

Output data

Switching

Contact switching type	1 N/O contact
Type of switch contact	Single contact
Note regarding the switch contact	Series connection, 2 N/O contacts
Contact material	AgNi
Maximum switching voltage	250 V AC 220 V DC
Minimum switching voltage	10 V (at 10 mA)
Limiting continuous current	10 A
Maximum inrush current	30 A (20 ms)
Min. switching current	10 mA (at 10 V)
Interrupting rating (ohmic load) max.	2500 VA (for 250 V AC)

Dimensions

Width	35 mm
-------	-------

REL-OR/LDP-220DC/1 - Single relay



2901910

<https://www.phoenixcontact.com/us/products/2901910>

Height	35 mm
Depth	58.5 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection	RT I
Ambient temperature (operation)	-40 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C

Standards and regulations


Standards/regulations	IEC 61810
	EN 60947

Mounting

Assembly instructions	On relay base PR3
Mounting position	any


Drawings

Diagram

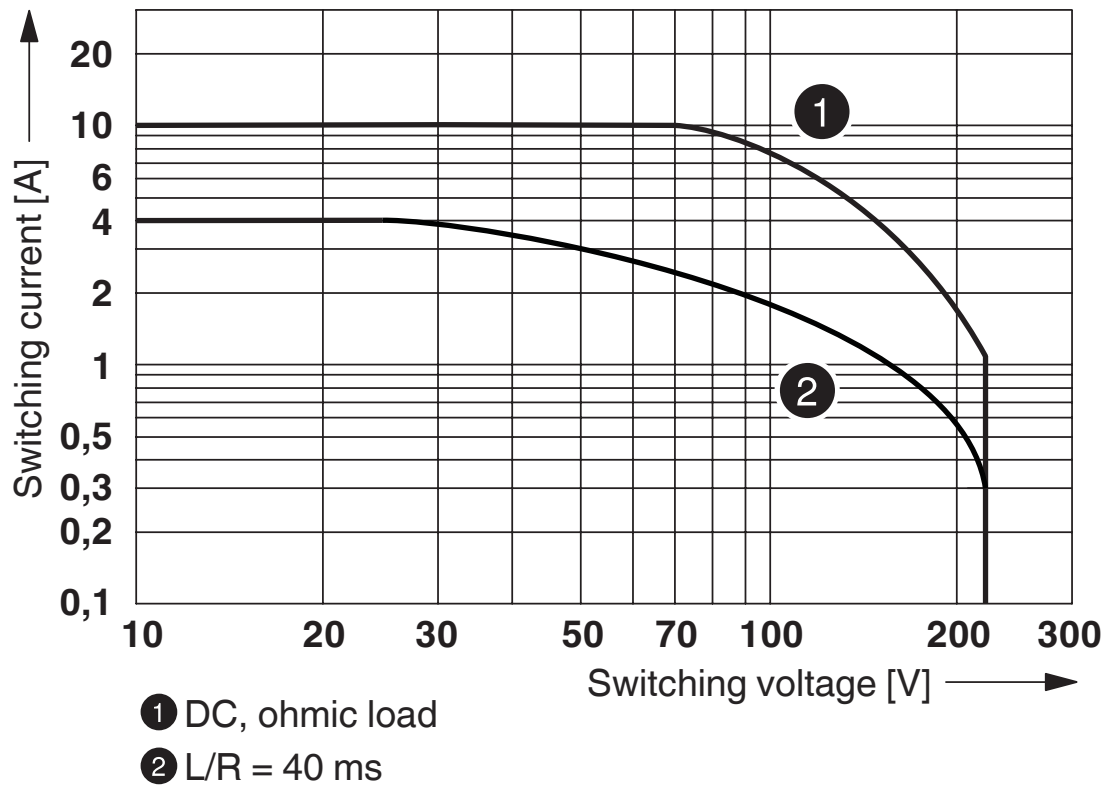

DC interrupting rating


Diagram

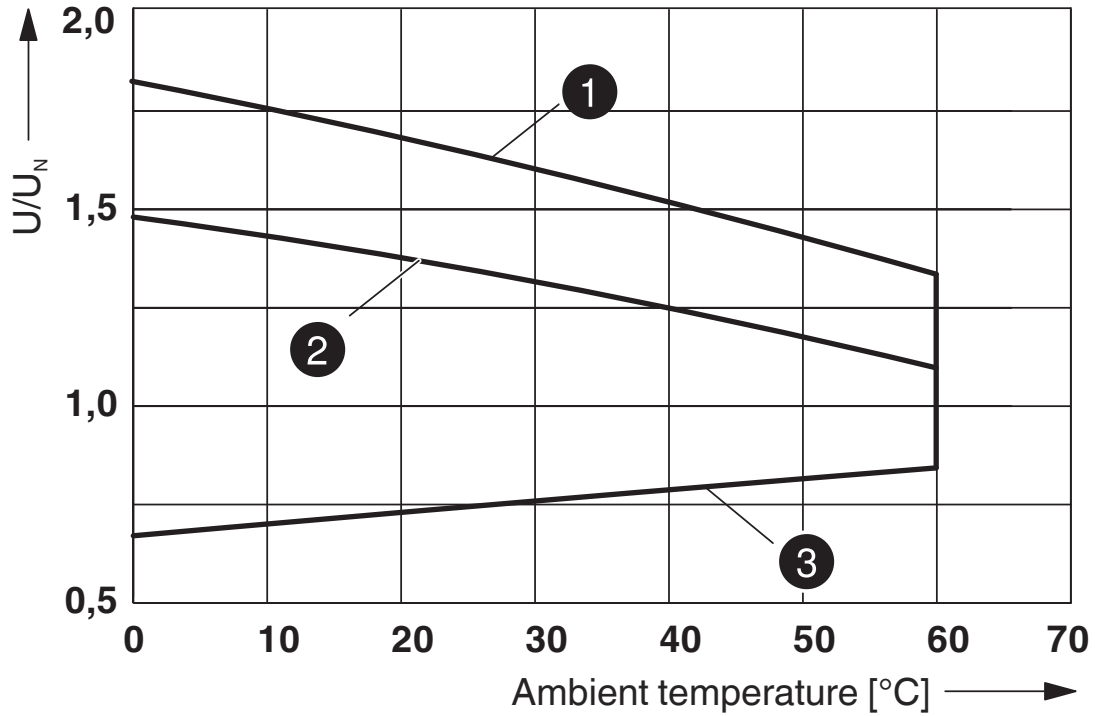

- ① Maximum operating voltage without load current (0 A)
- ② Maximum operating voltage at limiting continuous current (10 A)
- ③ Minimum pick-up voltage without pre-excitation

Operating voltage range of the relay

Circuit diagram

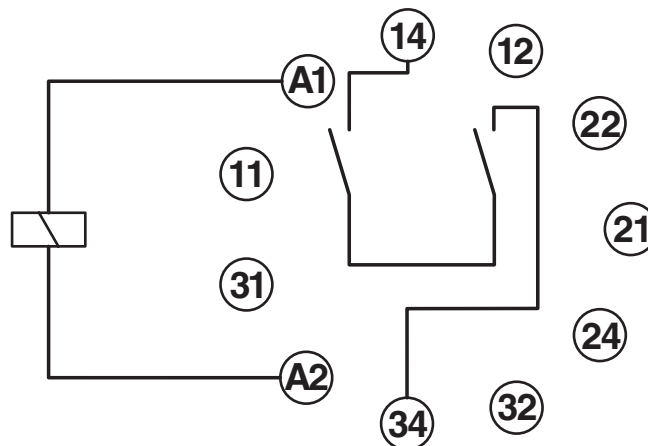

REL-OR/LDP-220DC/1 - Single relay



2901910

<https://www.phoenixcontact.com/us/products/2901910>

Classifications

ECLASS

ECLASS-11.0	27371601
-------------	----------

REL-OR/LDP-220DC/1 - Single relay



2901910

<https://www.phoenixcontact.com/us/products/2901910>

Environmental product compliance

China RoHS

Environment friendly use period (EFUP)	EFUP-5 An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
--	---

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

REL-OR/LDP-220DC/1 - Single relay



2901910

<https://www.phoenixcontact.com/us/products/2901910>

Accessories

UC-EM (21X8) - Snap-in markers

0825507

<https://www.phoenixcontact.com/us/products/0825507>



Snap-in markers, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, lettering field size: 21 x 8 mm, Number of individual labels: 20

UCT-EM (21X8) - Snap-in markers

0801489

<https://www.phoenixcontact.com/us/products/0801489>



Snap-in markers, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, lettering field size: 21 x 8 mm, Number of individual labels: 18

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA

586 Fulling Mill Road

Middletown, PA 17057, United States

(+717) 944-1300

info@phoenixcon.com