

VIP-2/PT/PDM-2/16/FU 6.3A - Potential distributors



2903603

<https://www.phoenixcontact.com/nz/products/2903603>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

VARIOFACE module, with two equipotential busbars (P1, P2) for potential distribution, for mounting on NS 35 rails. Module width: 97.7 mm



Your advantages

- Consecutive numbering
- Two potential levels
- Separate supply

Commercial data

Item number	2903603
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CK24D1
Product key	CK24D1
Catalog page	Page 579 (C-5-2019)
GTIN	4046356948166
Weight per piece (including packing)	275 g
Weight per piece (excluding packing)	220 g
Country of origin	US

Technical data

Notes

General	Polyamide PA non-reinforced
General	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.

Product properties

Product type	Potential distributor
Product family	VARIOFACE Professional
Potential connections	Per potential (P1, P2) 2 power/8 distributor terminal blocks

Insulation characteristics

Overvoltage category	II
Pollution degree	2

Electrical properties

Nominal voltage U_N	250 V AC/DC
Max. current carrying capacity per branch	6.3 A (fuse limited)
Max. total current of all branches	30 A (per potential)

Input data

Potential connections	Per potential (P1, P2) 2 power/8 distributor terminal blocks
-----------------------	--

Connection data

Service Entrance

Connection method	Push-in connection
Stripping length	15 mm
Number of connections	2
Conductor cross section rigid	0.2 mm ² ... 10 mm ²
Conductor cross section flexible	0.2 mm ² ... 6 mm ²
Conductor cross section AWG	24 ... 8

Distribution

Connection method	Push-in connection
Stripping length	8 mm
Number of connections	8
Number of positions	2
Conductor cross section rigid	0.14 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 2.5 mm ²
Conductor cross section AWG	26 ... 14

VIP-2/PT/PDM-2/16/FU 6.3A - Potential distributors



2903603

<https://www.phoenixcontact.com/nz/products/2903603>

Dimensions

Width	97.7 mm
Height	109.8 mm
Depth	51 mm

Material specifications

Color	gray (RAL 7042)
-------	-----------------

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Altitude	< 2000 m
Permissible humidity (operation)	90 %
Permissible humidity (storage/transport)	90 %

Standards and regulations


Standards/regulations	IEC 60664
	DIN EN 50178

Mounting

Mounting type	DIN rail mounting
Mounting position	any

Drawings

Circuit diagram

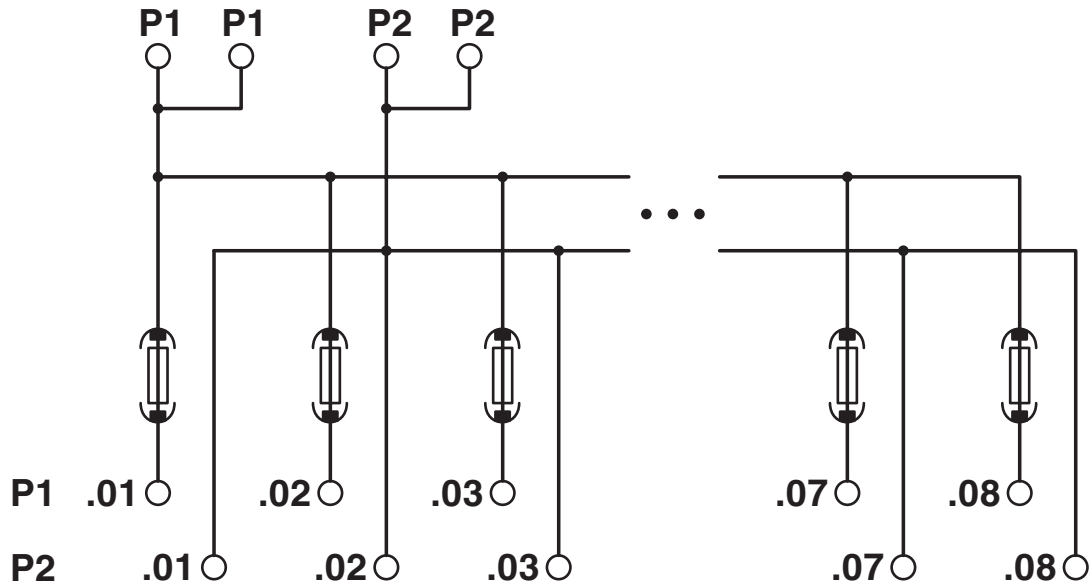

VIP-2/PT/PDM-2/16/FU 6.3A - Potential distributors





2903603


<https://www.phoenixcontact.com/nz/products/2903603>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/nz/products/2903603>

 CSA Approval ID: 2122203				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	250 V	30 A	24 - 8	-
per branch	-	6.3 A	-	-

 cUL Recognized Approval ID: FILE E 238705				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	250 V	30 A	24 - 8	-
per branch	-	6.3 A	-	-

 UL Recognized Approval ID: FILE E 238705				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	250 V	30 A	24 - 8	-
per branch	-	6.3 A	-	-

cULus Recognized				
-------------------------	--	--	--	--

VIP-2/PT/PDM-2/16/FU 6.3A - Potential distributors



2903603

<https://www.phoenixcontact.com/nz/products/2903603>

Classifications

ECLASS

ECLASS-11.0	27400609
ECLASS-12.0	27400609
ECLASS-13.0	27400609

ETIM

ETIM 9.0	EC001894
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

VIP-2/PT/PDM-2/16/FU 6.3A - Potential distributors



2903603

<https://www.phoenixcontact.com/nz/products/2903603>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Unit 15C, 906-930 Great South Road, Penrose
Auckland 1061
0508 474 636
sales@phoenixcontact.co.nz