

Busbar

Part no.

EVG-16/3PHAS/6MODUL/HI

Article no.


291485



Delivery programme

Range			Accessories
Basic function			EVG busbars
			no end caps required do not shorten
Rated current	I_n	A	100
Cross-section		mm ²	16
For use with			Use of auxiliary contacts
Phases		Number	3
Devices		Number	2


Notes



Technische Daten nach ETIM 4.0

Insulated			true
Number of phases			3
Cross-section		mm ²	16 mm ²
Rated uninterrupted current I_u		A	80 A
Length		mm	373.8 mm
Rated conditional short-circuit current I_q		kA	25 kA
Rated impulse voltage		kV	4 kV
Design of electrical connection			Fork connector
Rated short-time withstand current I_{cw}		kA	0 kA
Suitable for devices with auxiliary contacts			true
Suitable for devices with neutral pole			false
Suitable for number of devices			0
Max. rated operating voltage U_e		V	415 V
Unit width		mm	0 mm

Dimensions

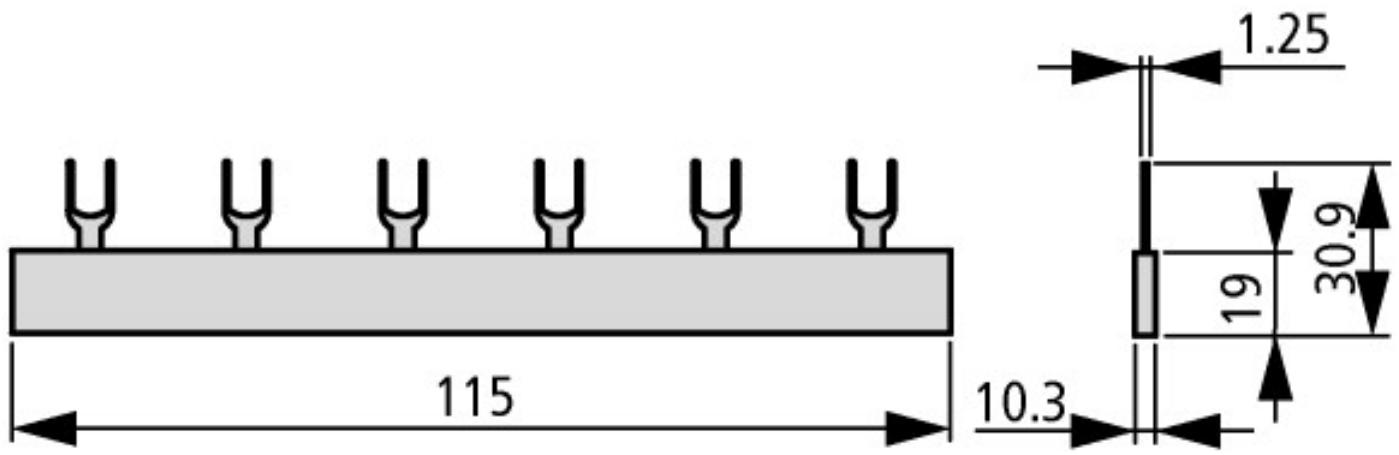

[Additional product information \(links\)](#)