

EINZELAUFSTELLUNGSTRAEGER FUER
 3RU21/3RB30/3RB31 BGR S00 EINZELAUFSTELLUNG
 HAUPTSTROMKR.: FEDERZUGKL. HILFSSTROMKR.: --

General technical data:

Product brand name		SIRIUS
Product designation		individual mount
Size of overload relay		S00
Ambient temperature		
<ul style="list-style-type: none"> during storage 	°C	-55 ... 80
<ul style="list-style-type: none"> during the operating phase 	°C	-20 ... 70

Installation/mounting/dimensions:

Type of fixing/fixation		screw and snap-on mounting onto 35 mm standard mounting rail
Width	mm	45
Height	mm	102
Depth	mm	68

Connections:

design of the electrical connection		
<ul style="list-style-type: none"> for main current circuit 		spring-loaded terminals
Type of the connectable conductor cross-section		
<ul style="list-style-type: none"> for main contacts <ul style="list-style-type: none"> unifilar stranded wire stranded wire <ul style="list-style-type: none"> with conductor end processing without conductor final cutting at AWG-conductors <ul style="list-style-type: none"> for main contacts 		0.5 ... 4 mm ² 0.5 ... 4 mm ² 0.5 ... 2.5 mm ² 1x (0.5 ... 2.5 mm ²) 1x (20 ... 12)


Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Global Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

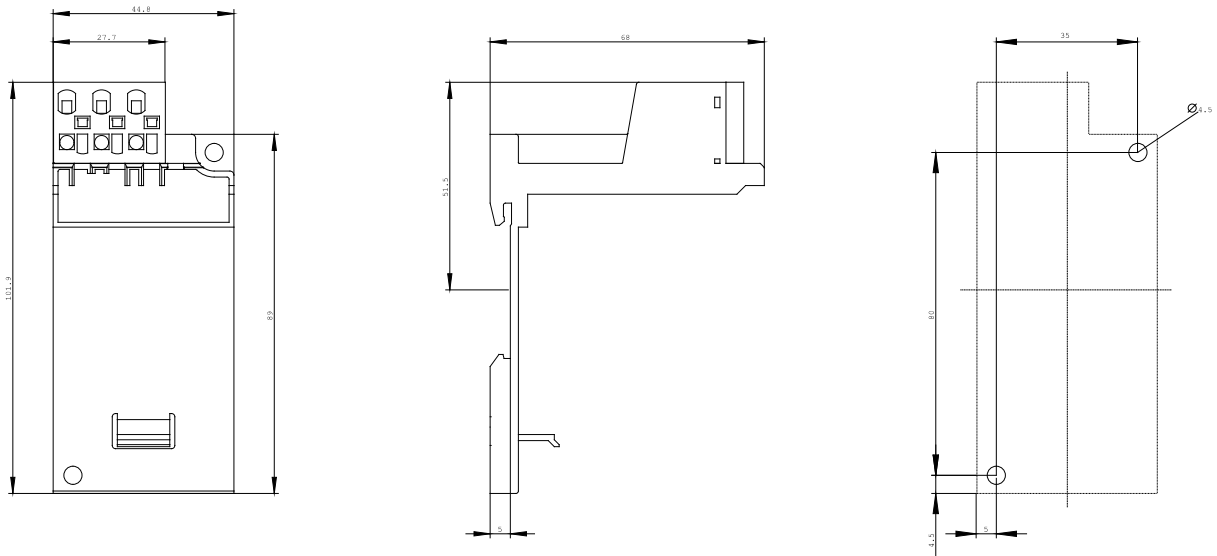

last change:

Apr 26, 2010