## **SIEMENS**


Product data sheet


## UNDERVOLTAGE RELEASE, AC 415V/50HZ, AC 480V/60HZ, W. SCREW CONNECTION; FOR CIRCUIT-BREAKERS, SZ S00/S0

General technical data:			
Product brand name		SIRIUS	
Product designation	-	undervoltage release	
Size of the circuit-breaker	-	S00, S0	
Acceptability for application	-	motor circuit breaker	
Protection class IP / frontal/front side		IP20	
Design of the short-circuit protection	-	fuse	
Degree of pollution		3	
Insulation voltage / rated value	V	690	
Insulation voltage / with degree of pollution 3 / rated value	V	690	
Ambient temperature			
during storage	°C	-50 80	
during the operating phase	°C	-20 60	
Item designation			
<ul> <li>according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</li> </ul>		F	
according to DIN EN 61346-2		F	
Auxiliary circuit:			
Number of NC contacts / for auxiliary contacts			
instantaneous switching		0	
Number of NO contacts / for auxiliary contacts			
instantaneous switching		0	
Number of changeover contacts / of the auxiliary contacts			
• non-delayed		0	
Control circuit:			
Type of voltage / of the controlled supply voltage		AC	
control supply voltage frequency			
• 1 / initial rated value	Hz	50	
• 1 / final rated value	Hz	60	
Control supply voltage			
• 1 / at 50 Hz / for AC / rated value	V	415	

• 1 / at 60 Hz / for AC / rated value	V	480		
Installation/mounting/dimensions:				
Type of fixing/fixation		snap-on mounting		
Width	mm	18.5		
Height	mm	90		
Depth	mm	68		
Certificates/approvals:				
verification of suitability		CE / UL / CSA / CCC		
Further information:				
Information- and Downloadcenter (Catalogs, Brochures,) http://www.siemens.com/industrial-controls/catalogs				
Global Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/mall				
Service&Support (Manuals, Certificates, Characteristics, FAQs,) http://support.automation.siemens.com/WW/view/en/3RV2902-1AV1/all				

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3RV2902-1AV1

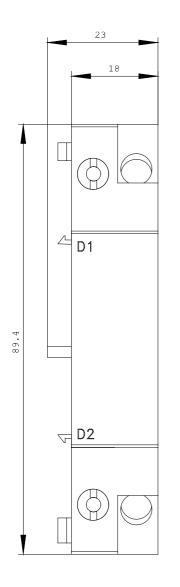

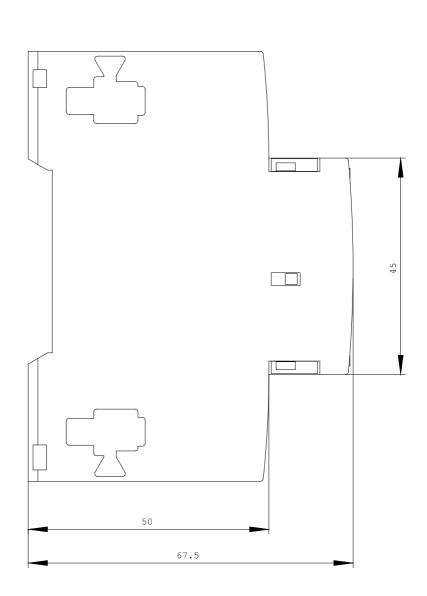

Ха | ,02 last change: