

22MM PLASTIC ROUND COMPLETE UNIT COMBINATION:  
INDICATOR LIGHT WITH SMOOTH LENSE NON-ILLUMINATED  
WITH LAMP HOLDER BA 9S WITHOUT LAMP SCREW TERMINAL  
WITH HOLDER WHITE



Figure similar

<b>Design of the product</b>	Complete unit round
<b>Enclosure:</b>	
<b>Shape of the enclosure front</b>	round
<b>Material of the enclosure</b>	plastic
<b>Number of command points</b>	0
<b>Actuator:</b>	
<b>Design of the operating mechanism</b>	indicator light
<b>Product expansion optional Light source</b>	Yes
<b>Color</b>	
• of the actuating element	White
<b>Material of the actuating element</b>	plastic
<b>Shape of the actuating element</b>	Smooth lens
<b>Number of switching positions</b>	0
<b>Front ring:</b>	
<b>Product component front ring</b>	No
<b>Holder:</b>	
<b>Material of the holder</b>	Plastic

Contact block/ lampholder:	
Mounting type	BA 9s without lamp
Number of lampholders	1
Number of switching elements	0

General technical data:	
<b>Product function</b>	
<ul style="list-style-type: none"> <li>• positive opening</li> <li>• EMERGENCY STOP function</li> </ul>	No No
<b>Product component</b>	
<ul style="list-style-type: none"> <li>• Light source</li> </ul>	No
<b>Protection class IP</b>	IP66
<b>Vibration resistance</b>	
<ul style="list-style-type: none"> <li>• acc. to IEC 60068-2-6</li> </ul>	20 ... 200 Hz: 5g
<b>Equipment marking</b>	
<ul style="list-style-type: none"> <li>• acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750</li> <li>• acc. to DIN EN 61346-2</li> <li>• acc. to DIN EN 81346-2</li> </ul>	H P P

Auxiliary circuit:	
<b>Number of NC contacts</b>	
<ul style="list-style-type: none"> <li>• for auxiliary contacts</li> </ul>	0
<b>Number of NO contacts</b>	
<ul style="list-style-type: none"> <li>• for auxiliary contacts</li> </ul>	0
<b>Number of CO contacts</b>	
<ul style="list-style-type: none"> <li>• for auxiliary contacts</li> </ul>	0

Connections/ Terminals:	
<b>Type of electrical connection</b>	screw-type terminals
<b>Tightening torque of the screws in the bracket</b>	1 N·m

Ambient conditions:	
<b>Ambient temperature</b>	
<ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> </ul>	-25 ... +60 °C -40 ... +80 °C
<b>Environmental category during operation acc. to IEC 60721</b>	3K6

Installation/ mounting/ dimensions:	
<b>Mounting type</b>	front mounting
<b>Shape of the installation opening</b>	round
<b>Mounting diameter</b>	22 mm

Accessories:	
<b>Product component holder for 3 switching elements</b>	No

## Certificates/approvals

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
--------------------------	---------------------------	-------------------	-------------------



CSA



UL



EG-Konf.

[spezielle Prüfbescheinigungen](#)  
[n](#)



ABS

Shipping Approval	other
-------------------	-------



DNV



LRS



PRS



RINA

[Umweltbestätigung](#)

[Bestätigungen](#)

### other

[sonstig](#)

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB32046AA60>

### Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB32046AA60>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SB32046AA60>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SB32046AA60&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SB32046AA60&lang=en)

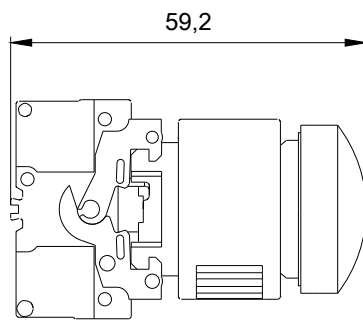

last modified:

W9.4444;  
W7.5833; 3SB32\_ALL  
24.02.2016