



Digital module, 4 inputs and 2 relay outputs, input voltage 24 V DC, relay outputs monostable, max. 2 digital modules, for SIMOCODE pro V basic unit

<b>product brand name</b>	SIRIUS
<b>product designation</b>	digital modules
<b>General technical data</b>	
<b>product component</b>	
<ul style="list-style-type: none"> <li>input for thermistor connection</li> <li>digital input</li> <li>input for analog temperature sensors</li> <li>input for ground fault detection</li> <li>relay output</li> </ul>	<p>No</p> <p>Yes</p> <p>No</p> <p>No</p> <p>Yes</p>
<b>consumed active power</b>	0.7 W
insulation voltage with degree of pollution 3 at AC rated value	300 V
<b>surge voltage resistance rated value</b>	4 000 V
<b>protection class IP</b>	IP20
<b>shock resistance according to IEC 60068-2-27</b>	15g / 11 ms
<b>vibration resistance according to IEC 60068-2-6</b>	1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
<b>switching capacity current of the NO contacts of the relay outputs at AC-15</b>	
<ul style="list-style-type: none"> <li>at 24 V</li> <li>at 120 V</li> <li>at 230 V</li> </ul>	<p>6 A</p> <p>6 A</p> <p>3 A</p>
<b>switching capacity current of the NO contacts of the relay outputs at DC-13</b>	
<ul style="list-style-type: none"> <li>at 24 V</li> <li>at 60 V</li> <li>at 125 V</li> </ul>	<p>2 A</p> <p>0.55 A</p> <p>0.25 A</p>
<b>mechanical service life (operating cycles) typical</b>	10 000 000
electrical endurance (operating cycles) typical	100 000
<b>reference code according to IEC 81346-2</b>	K
continuous current of the NO contacts of the relay outputs	
<ul style="list-style-type: none"> <li>at 50 °C</li> <li>at 60 °C</li> </ul>	<p>6 A</p> <p>5 A</p>
<b>Substance Prohibitance (Date)</b>	05/01/2012
certificate of suitability according to ATEX directive 2014/34/EU	BVS 06 ATEX F001
explosion device group and category according to ATEX directive 2014/34/EU	II (2) G, II (2) D, I (M2)
<b>Electromagnetic compatibility</b>	
EMC emitted interference according to IEC 60947-1	class A
EMC immunity according to IEC 60947-1	corresponds to degree of severity 3
<b>conducted interference</b>	
<ul style="list-style-type: none"> <li>due to burst according to IEC 61000-4-4</li> <li>due to conductor-earth surge according to IEC</li> </ul>	<p>1 kV</p> <p>2 kV</p>

61000-4-5

- due to conductor-conductor surge according to IEC 61000-4-5
- due to high-frequency radiation according to IEC 61000-4-6

**field-based interference according to IEC 61000-4-3 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to CISPR11**

**field-bound HF interference emission according to CISPR11**

1 kV

10 V

10 V/m

6 kV contact discharge / 8 kV air discharge corresponds to degree of severity A

corresponds to degree of severity A

#### Inputs/ Outputs

##### product function

- parameterizable inputs
- parameterizable outputs

Yes

Yes

##### number of inputs

4

##### number of digital inputs

4

- with a common reference potential

4

##### digital input version

- type 1 acc. to IEC 61131
- type 2 acc. to IEC 61131

No

Yes

##### number of analog inputs

0

input voltage at digital input at DC rated value

24 V

##### number of outputs

2

##### number of semiconductor outputs

0

##### number of outputs as contact-affected switching element

2

##### number of analog outputs

0

##### switching behavior

monostable

##### property of contacts of the relay outputs

Floating NO contacts (NC reaction parameterizable via internal signal conditioning), connected to common ground, can be freely assigned to the control functions (e.g. line, star (wye), delta contactor or signaling of the operating state)

##### wire length for digital signals maximum

300 m

#### Installation/ mounting/ dimensions

##### mounting position

any

##### fastening method

screw and snap-on mounting

##### height

92 mm

##### width

22.5 mm

##### depth

124 mm

##### required spacing

- top
- bottom
- left
- right

40 mm

40 mm

0 mm

0 mm

#### Connections/ Terminals

##### product component removable terminal for auxiliary and control circuit

Yes

##### type of connectable conductor cross-sections

- solid
- finely stranded with core end processing
- at AWG cables solid
- at AWG cables stranded

1x (0.5 ... 4.0 mm<sup>2</sup>), 2x (0.5 ... 2.5 mm<sup>2</sup>)

1x (0.5 ... 2.5 mm<sup>2</sup>), 2x (0.5 ... 1.5 mm<sup>2</sup>)

1x (20 ... 14), 2x (20 ... 16)

1x (20 ... 12), 2x (20 ... 14)

tightening torque with screw-type terminals

0.8 ... 1.2 N·m

tightening torque [lbf·in] with screw-type terminals

7 ... 10.3 lbf·in

#### Ambient conditions

##### installation altitude at height above sea level

- 1 maximum
- 2 maximum
- 3 maximum

2 000 m

3 000 m; max. +50 °C (no protective separation)

4 000 m; max. +40 °C (no protective separation)

##### ambient temperature

- during operation
- during storage
- during transport

-25 ... +60 °C

-40 ... +80 °C

-40 ... +80 °C

##### environmental category

- during operation according to IEC 60721
- during storage according to IEC 60721
- during transport according to IEC 60721

3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6  
 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6  
 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6  
 5 ... 95 %  
 B300 / R300

relative humidity during operation

**contact rating of auxiliary contacts according to UL**

**Short-circuit protection**

design of short-circuit protection per output

Fuse links: gG 6 A, quick-response 10 A (IEC 60947-5-1), miniature circuit-breaker C char.: 1.6 A (IEC 60947-5-1) or 6 A (I<sub>K</sub> < 500 A)

**Safety related data**

**touch protection against electrical shock**

finger-safe

**Galvanic isolation**

**(electrically) protective separation according to IEC 60947-1**

All circuits with protective separation (double creepage paths and clearances), the information in the "Protective Separation" test report, No. A0258, must be observed (link see further information)

**Control circuit/ Control**

**type of voltage of the control supply voltage**

DC

**control supply voltage at DC**

- rated value

24 V

**operating range factor control supply voltage rated value at DC**

- initial value

0.8

- full-scale value

1.2

**Certificates/ approvals**

**General Product Approval**

**EMC**



[Confirmation](#)



**For use in hazardous locations**

**Declaration of Conformity**

**Test Certificates**

**Marine / Shipping**



EG-Konf.

[Type Test Certificates/Test Report](#)



**Marine / Shipping**

**other**



[Confirmation](#)



**Further information**

**Siemens has decided to exit the Russian market (see here).**

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

**Siemens is working on the renewal of the current EAC certificates.**

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7300-1AB00-0>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7300-1AB00-0>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<https://support.industry.siemens.com/cs/ww/en/ps/3UF7300-1AB00-0>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3UF7300-1AB00-0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7300-1AB00-0&lang=en)

Test report No. A0258, protective separation

<https://support.industry.siemens.com/cs/ww/en/view/109748152>

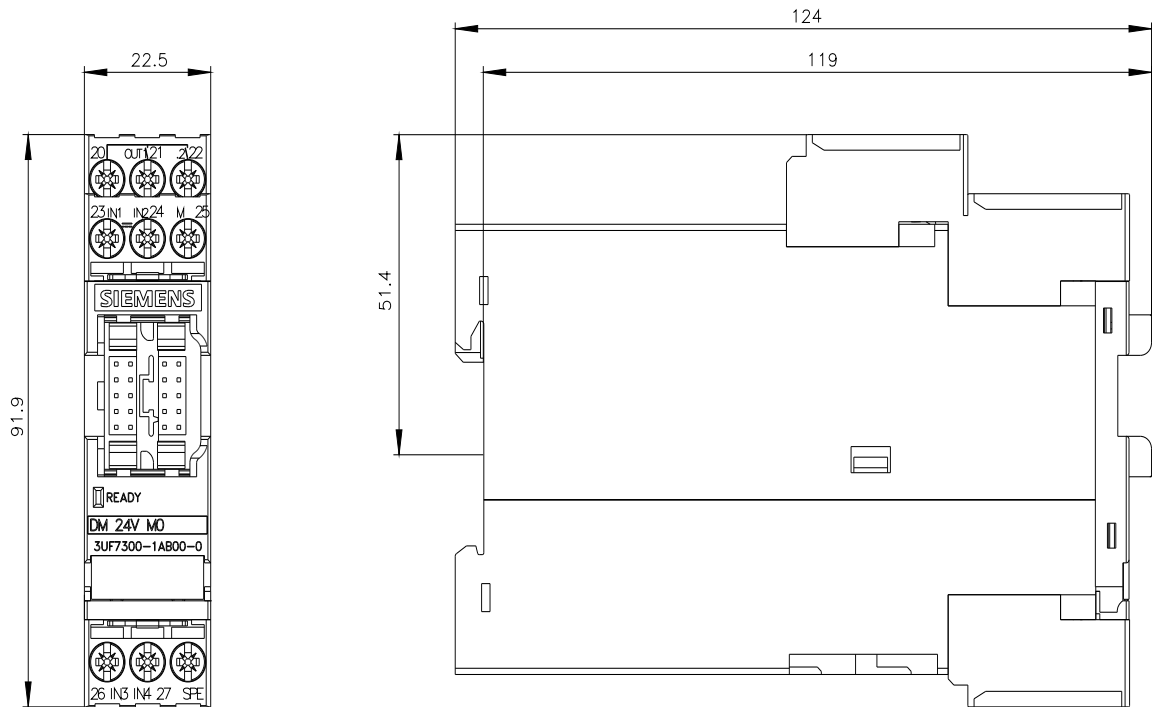

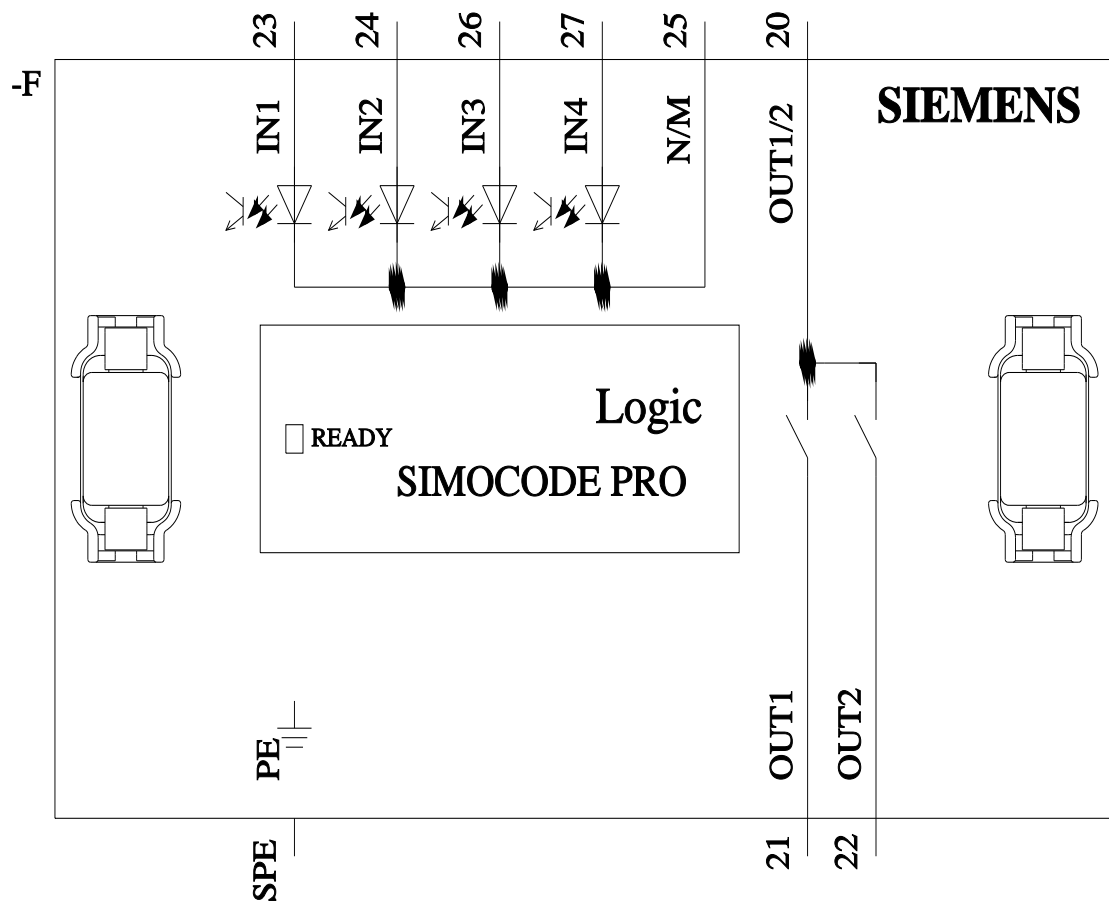

last modified:

4/7/2022