

Product datasheet

Specifications



output interface module - 9.5 mm - solid state - 24..230 V AC - 2.3 A

ABS2SA01MB

Main

Range of product	Interface for discrete signals
Product or component type	Slim solid state output interface module
Contacts type and composition	1 NC
[Uc] control circuit voltage	24 V
Control circuit type	DC
Maximum [In] rated current	13.6 mA
Reverse polarity protection	Control circuit: internal Output circuit: internal
Short-circuit protection	3.15 A external fuse fast blow (Ik ≤ 1 kA AC and Ik ≤ 100 A DC)
[Ith] conventional free air thermal current	2.3 A at 40 °C
Local signalling	Green mechanical indicator for position of contacts and 1 green LED control signal state
Sale per indivisible quantity	5
Width pitch dimension	9.5 mm

Complementary

Control circuit voltage limits	28.8 V
Voltage state 1 guaranteed	16.9 V
Current state 1 guaranteed	8.3 mA
Voltage state 0 guaranteed	5.3 V
Current state 0 guaranteed	2 mA
[Ue] rated operational voltage	24...240 V
Output circuit type	AC
Rated operational voltage limits	≤ 264 V
[Ie] rated operational current	1 A AC-15 vertical position, single product conforming to IEC 60947-5-1 1.6 A AC-13 vertical position, single product conforming to IEC 60947-5-1 1.6 A AC-14 vertical position, single product conforming to IEC 60947-5-1 1.9 A AC-12 vertical position, single product conforming to IEC 60947-5-1 0.5 A AC-12 vertical position, touching product conforming to IEC 60947-5-1 0.5 A AC-13 vertical position, touching product conforming to IEC 60947-5-1 0.5 A AC-14 vertical position, touching product conforming to IEC 60947-5-1 0.5 A AC-15 vertical position, touching product conforming to IEC 60947-5-1
Minimum switching current	10 mA
Maximum residual current	2.5 mA
Drop-out voltage	3 V 1.5 V

DV/dt	500 V/μs
0 crossing voltage	50 V peak
Response time	<= 10 ms from state 0 to state 1 at 50 Hz <= 10 ms from state 1 to state 0 at 50 Hz <= 8 ms from state 0 to state 1 at 60 Hz <= 8 ms from state 1 to state 0 at 60 Hz
Switching frequency	<= 0.6 Hz AC-13 module alone duty cycle: 40 % <= 0.6 Hz AC-14 module alone duty cycle: 40 % <= 0.6 Hz AC-15 module alone duty cycle: 40 % <= 50 Hz on resistive load duty cycle: 50 %
[UI] rated insulation voltage	250 V conforming to VDE 0110 group C 300 V conforming to IEC 60947-1
Flame retardance	V0 conforming to UL 94
Cable cross section	0.34...2.5 mm ² , 1 or 2 wires flexible with cable end screw clamp terminal 0.27◆◆◆4 mm ² , 1 wire rigid 0.6...2.5 mm ² , 1 or 2 wires flexible without cable end
Operating position	Any position
Installation category	II conforming to IEC 60947-1
Mounting support	Symmetrical DIN rail Asymmetrical DIN rail Combination rail
Net weight	0.34 kg

Environment

Dielectric strength	2500 V between wired interface and earth for 1 minute 4000 V between I/O for 1 minute
Standards	IEC 60947-5-1
Product certifications	UL LROS (Lloyds register of shipping) DNV CSA BV
IP degree of protection	IP20 conforming to IEC 60529
protective treatment	TC
Fire resistance	960 °C conforming to IEC 60695-2-1
Shock resistance	30 gn for 11 ms conforming to IEC 60068-2-27
Vibration resistance	5 gn conforming to IEC 60068-2-6 (f = 10...150 Hz)
Electromagnetic compatibility	Electromagnetic field immunity test: level 3 10 V/m between 27...1000 MHz conforming to IEC 61000-4-3 Electrostatic discharge immunity test: level 3 8 kV conforming to IEC 61000-4-2 Fast transients immunity test: level 3 on input/output 1 kV conforming to IEC 61000-4-4 Fast transients immunity test: level 3 on power supply 2 kV conforming to IEC 61000-4-4 1.2/50 μs shock waves immunity test conforming to IEC 60947-1
Ambient air temperature for operation	-25...70 °C at Us -5...55 °C unrestricted operation
ambient air temperature for storage	-40...80 °C
Operating altitude	<= 3000 m
Pollution degree	2 conforming to IEC 60947-1

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Number of Units in Package 1	1
Package 1 Height	7 cm
Package 1 Width	9 cm
Package 1 Length	10.8 cm
Package 1 Weight	42 g

Contractual warranty

Warranty	12 months
----------	-----------

Sustainability


Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)

Well-being performance

 Mercury Free

 Rohs Exemption Information [Yes](#)

Reach Regulation [REACH Declaration](#)

Eu Rohs Directive Pro-active compliance (Product out of EU RoHS legal scope)


China Rohs Regulation [China RoHS declaration](#)

Weee The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Slim Solid-State Interface Module

Dimensions

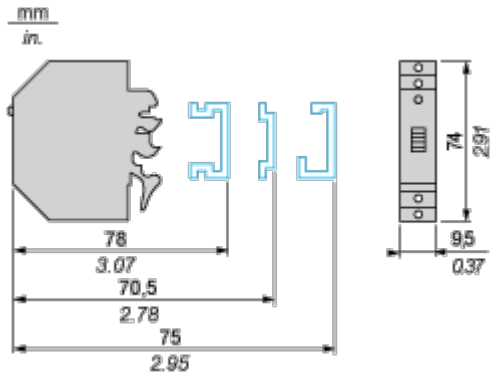


Connections and Schema

Slim Solid-State Interface Module

Example of Application with PLC


Interfacing PLC discrete outputs

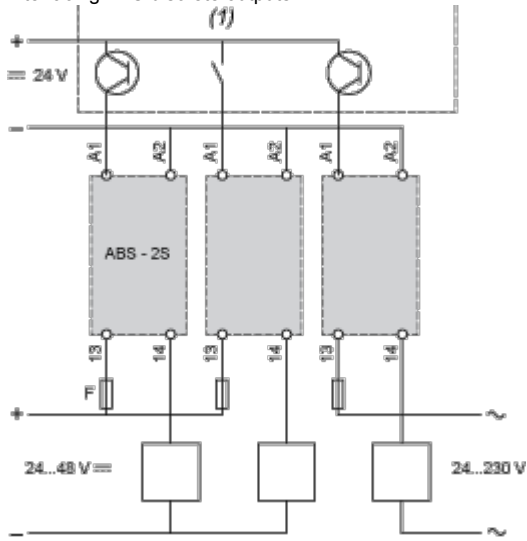


(1) PLC positive logic transistor (or relay) outputs

Solid-State Output Module

Circuit Diagram



Wiring Diagrams

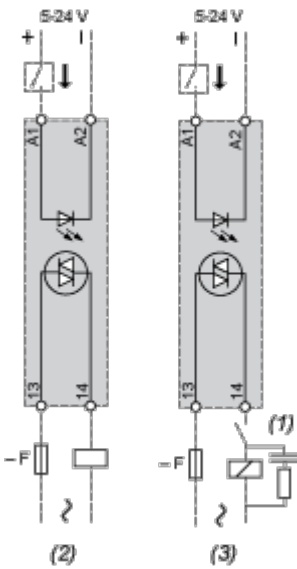


F fuse DF1 SS133.2

- (1) or peak limiter
- (2) Resistive load
- (3) Inductive load

Performance Curves

Temperature Derating Curves - $U_c = U_s = 24\text{ V}$

AC Loads



- (1) Vertical module alone or adjacent to modules with low heat dissipation
- (2) Horizontal module alone or adjacent to modules with low heat dissipation
- (3) Vertical module mounted with 2 modules with identical heat dissipation on both sides
- (4) Horizontal module mounted with 2 modules with identical heat dissipation on both sides

NOTE: $T^{\circ}\text{C}$ is the ambient temperature.