

Product data sheet

Specifications



Converter for Universal Pt100 probes, Harmony Analog, temperature transmitter, 0...100 degree C Or 32...212 degree F

RMPT30BD

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 141.00 USD

Main

Range of Product	Harmony Analog
Product or Component Type	Converter for Universal Pt100 probes
Analogue input type	Temperature probe 0...100 °C/32...212 °F Pt 100 2, 3 or 4 wires
Analogue output type	Current 0...20 mA <= 500 Ohm Current 4...20 mA <= 500 Ohm Voltage 0...10 V >= 100 kOhm

Complementary

Protection Type	Reverse polarity protection on power supply Short-circuit protection on output Overvoltage protection on output (+/- 30 V) Reverse polarity protection on output
abnormal analogue output voltage	-15...-11 V no input or input wire broken 11...15 V no input or input wire broken
abnormal analogue output current	-30...0 mA no input or input wire broken 22...30 mA no input or input wire broken
[Us] Rated Supply Voltage	24 V DC non isolated +/- 20 %
Current consumption	<= 40 mA voltage output <= 60 mA current output
Local signalling	for power ON LED (green)
Measurement error	+/- 0.5 % of full scale 3 or 4 wires)20 °C temporary performance degradation when subject to electromagnetic interference) +/- 1 % of full scale 2 wires)20 °C temporary performance degradation when subject to electromagnetic interference)
Repeat accuracy	+/- 0.2 % full scale 20 °C +/- 0.6 % full scale 60 °C
Temperature Coefficient	150 ppm/°C
Maximum wiring resistance	0.2 Ohm 2 wires
clamping connection capacity	1 x 2.5 mm ² 2 x 1.5 mm ²
Tightening torque	5.3...9.7 lbf.in (0.6...1.1 N.m)
marking	CE
Surge withstand	0.5 kV 1.2/50 µs IEC 61000-4-5
[Ui] Rated Insulation Voltage	2000 V
Fixing mode	Clip-on (35 mm symmetrical DIN rail) Fixed (mounting plate)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Safety reliability data	MTTFd = 32.9 years B10d = 30437
Net Weight	0.26 lb(US) (0.12 kg)

Environment

Electromagnetic compatibility	Electrostatic discharge - test level: 6 kV level 3 (contact discharge) conforming to IEC 61000-4-2 Electrostatic discharge - test level: 8 kV level 3 (air discharge) conforming to IEC 61000-4-2
Standards	DIN 43760 IEC 60751 IEC 60947-1 IEC 60584-1
Product Certifications	GL UL CSA
IP degree of protection	IP20 terminal block) IP50 housing)
Fire resistance	1562.0000000000 °F (850 °C) IEC 60695-2-1 1562.0000000000 °F (850 °C) UL
Shock resistance	50 gn 11 ms IEC 60068-2-27
Vibration resistance	5 gn 10...100 Hz)IEC 60068-2-6
Resistance to fast transients	1 kV IEC 61000-4-4 on input-output) 2 kV IEC 61000-4-4 on power supply)
Disturbance radiated/conducted	CISPR 22 group 1 - class B CISPR 11
Ambient Air Temperature for Storage	-40.0000000000...185.0000000000 °F (-40...85 °C)
Ambient Air Temperature for Operation	32.0000000000...122.0000000000 °F (0...50 °C) mounting side by side 32.0000000000...140.0000000000 °F (0...60 °C) 2 cm spacing
Pollution degree	2 IEC 60664-1

Ordering and shipping details

Category	US10CP222375
Discount Schedule	0CP2
GTIN	3389110108965
Returnability	No
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.06 in (2.7 cm)
Package 1 Width	3.2 in (8.2 cm)
Package 1 Length	3.3 in (8.5 cm)
Package 1 Weight	3.8 oz (108.0 g)
Unit Type of Package 2	S02
Number of Units in Package 2	47
Package 2 Height	5.9 in (15 cm)

Package 2 Width	11.8 in (30 cm)
Package 2 Length	15.7 in (40 cm)
Package 2 Weight	12.251 lb(US) (5.557 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	752
Package 3 Height	29.5 in (75 cm)
Package 3 Width	23.6 in (60 cm)
Package 3 Length	31.5 in (80 cm)
Package 3 Weight	216.05 lb(US) (98 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.


[Learn more about Green Premium >](#)


[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

 Mercury Free

 RoHS Exemption Information Yes

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu RoHS Directive

Pro-active compliance (Product out of EU RoHS legal scope)

China RoHS Regulation

[China RoHS declaration](#)

Environmental Disclosure

[Product Environmental Profile](#)

Weee

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Circularity Profile

[End of Life Information](#)


California Proposition 65

WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Analog Interface (Converter)

Dimensions

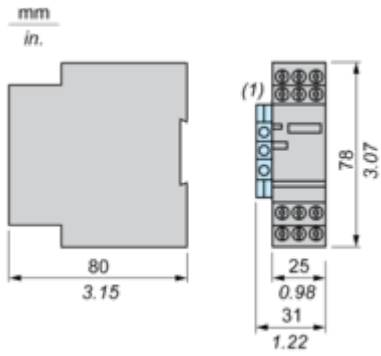


(1) Terminal block AB1TP435U or AB1RRNTP435U2


Mounting and Clearance

Mounting

Mounting on Rails AM1•••••




Panel Mounting

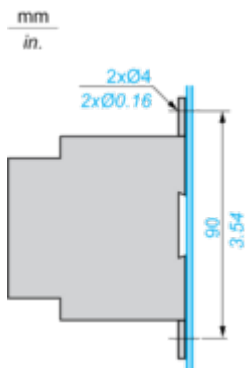

Connections and Schema

Analog Interface: Converter for Universal Pt100 Probe


Wiring Diagram

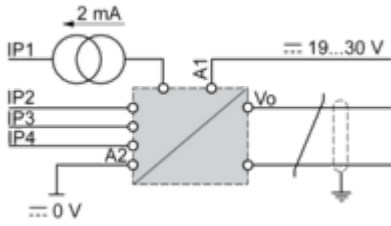

The input, output and power supply lines must be kept away from the power cables to avoid effects due to induced interference.
 The supply, input and output cables must be shielded as indicated in the schemes and must be kept away from each other.


Input Connections

2-wire type



$RL1 + RL2 \leq 200 \text{ m}\Omega$


3-wire type



$RL1 = RL2 = RL3$

$RL1 + RL2 \geq 200 \text{ }\Omega$

4-wire type



$RL1 + RL2 \leq 200 \text{ }\Omega$

Technical Illustration

Dimensions

