

# Product data sheet

Specifications



! To be discontinued

interface plug in relay, Harmony Electromechanical Relays, 10A, 1CO, with LED, lockable test but to n, 6V DC

RXG12RD

! To be discontinued on: Aug 15, 2024

Product availability: Non-Stock - Not normally stocked in distribution facility

Price\*: 10.80 USD

## Main

Range Of Product	Harmony Electromechanical Relays
Series Name	Interface relay
Product Or Component Type	Plug-in relay
Device Short Name	RXG
Contacts Type And Composition	1 C/O
[Ithe] Conventional Enclosed Thermal Current	10 A -40...131 °F (-40...55 °C)
Local Signalling	Flag

## Complementary

Status Led	With
[Ie] Rated Operational Current	10 A 30 V DC) UL 10 A 30 V DC) IEC 10 A 250 V AC) IEC 10 A 250 V AC) UL
Electrical Durability	100000 cycles NO resistive at 55 °C 100000 cycles NC resistive at 55 °C
Coil Resistance	68 Ohm +/- 10 %
Shock Resistance	20 gn in operation 100 gn not in operation
Mounting Position	Any position
[Uc] Control Circuit Voltage	6 V DC
Colour Of Cover	Standard
Drop-Out Voltage Threshold	$\geq 0.1 U_c$ DC
Load Current	10 A 250 V AC
Minimum Switching Capacity	500 mW at 100 mA, 5 V DC
Maximum Switching Capacity	2500 VA
Control Type	Lockable test button
Torque Value	7.08 lbf.in (0.8 N.m)
Contact Resistance	100 mOhm

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Insulation Resistance	1000 MOhm at 500 V DC
Electrical Insulation Class	Class F
Mechanical Durability	10000000 cycles
Safety Reliability Data	B10d = 100000
Operating Time	20 ms
Reset Time	20 ms
Overvoltage Category	III
Maximum Switching Voltage	250 V AC 30 V DC
Protection Category	RT I
Operating Rate	<= 1800 cycles/hour under load <= 18000 cycles/hour no-load
Pollution Degree	2
Utilisation Coefficient	20 %
[U <sub>i</sub> ] Rated Insulation Voltage	250 V IEC 300 V CSA 300 V UL
Dielectric Strength	1000 V AC between contacts with micro disconnection 5000 V AC between coil and contact with reinforced insulation
Test Levels	Level A group mounting
Device Presentation	Complete product
Contacts Material	Silver alloy (AgSnO <sub>2</sub> In <sub>2</sub> O <sub>3</sub> )
Net Weight	0.04 lb(US) (0.02 kg)

## Environment

Standards	IEC 61810-1 CSA C22.2 No 14 UL 508
Product Certifications	CSA CE EAC UL DNV-GL
Ambient Air Temperature For Storage	-40...185 °F (-40...85 °C)
Ambient Air Temperature For Operation	-40...158 °F (-40...70 °C)
Ip Degree Of Protection	IP40
Relative Humidity	10...85 %
Vibration Resistance	3 gn +/- 0.75 mm 10...150 Hz)in operation 5 gn +/- 0.75 mm 10...150 Hz)not in operation

## Ordering and shipping details

Category	US10CP221127
Discount Schedule	0CP2
Gtin	3606480688713
Returnability	No
Country Of Origin	CN

## Packing Units

<b>Unit Type Of Package 1</b>	PCE
<b>Number Of Units In Package 1</b>	1
<b>Package 1 Height</b>	1.36 in (3.45 cm)
<b>Package 1 Width</b>	3.64 in (9.25 cm)
<b>Package 1 Length</b>	3.4 in (8.6 cm)
<b>Package 1 Weight</b>	8.04 oz (228 g)

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

## Well-being performance

Reach Free Of Svhc

Toxic Heavy Metal Free

Mercury Free

Rohs Exemption Information Yes

## Certifications & Standards

**Reach Regulation**

[REACH Declaration](#)

**Eu Rohs Directive**

Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)

**China Rohs Regulation**

[China RoHS declaration](#)

**Environmental Disclosure**

[Product Environmental Profile](#)

**Circularity Profile**


No need of specific recycling operations

**California Proposition 65**

WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Dimensions Drawings


Dimensions

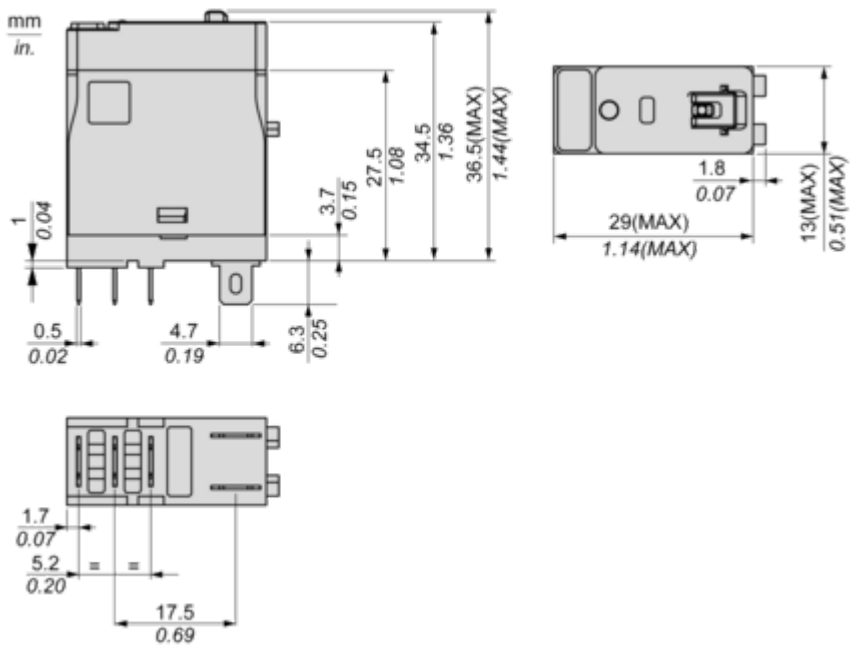

Connections and Schema

Wiring Diagram

---




Performance Curves

Performance Curves

---

Maximum Switching Capacity



X : Switching voltage (V)

Y : Switching current (A)

(1) AC Resistive Load


(2) AC Inductive Load  $\cos(\phi)=0.4$

(3) DC Resistive Load

(4) DC Inductive Load (L/R=7ms)

Life Expectancy

Resistive Load




X : Contact Current (A)

Y : Operating Cycle Number

Life Expectancy

Inductive Load



X : Contact Current (A)

Y : Operating Cycle Number


**NOTE:** These are typical curves, actual durability depends on load, environment, duty cycle, etc.



Coil Operating Range

---

DC Coil Operating Range VS Ambient Temperature

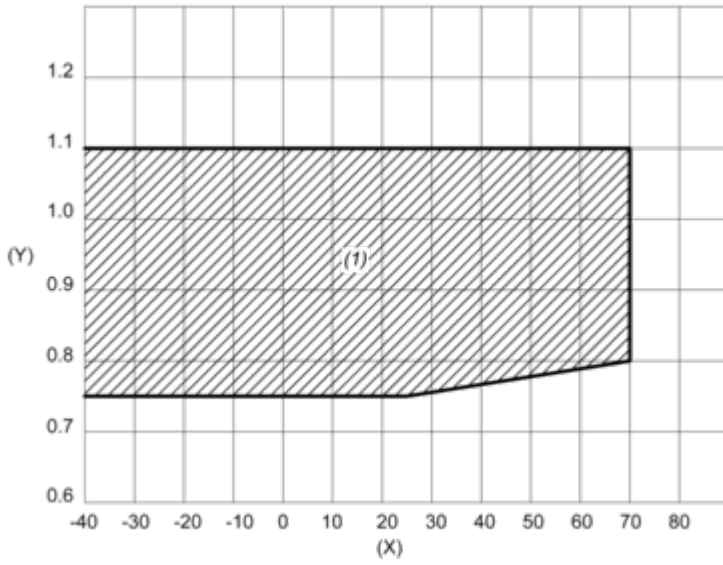

X : Ambient temperature (°C)

Y : Coil voltage (U/Uc)

(1) Permitted operating range area