

# Product datasheet

Specifications



interface plug in relay, Harmony Electromechanical Relays, 10A, 1CO, with LED, 120V AC

RXG13F7

## Main

Range Of Product	Harmony Electromechanical Relays
Series Name	Interface relay
Product Or Component Type	Plug-in relay
Device Short Name	RXG
Contacts Type And Composition	1 C/O
[Ithe] Conventional Enclosed Thermal Current	10 A at -40...55 °C
Local Signalling	Flag

## Complementary

Status Led	With
[Ie] Rated Operational Current	10 A at 30 V (DC) conforming to UL 10 A at 30 V (DC) conforming to IEC 10 A at 250 V (AC) conforming to IEC 10 A at 250 V (AC) conforming to UL
Electrical Durability	100000 cycles for NO resistive load at 55 °C 100000 cycles for NC resistive load at 55 °C
Coil Resistance	6300 Ohm +/- 10 %
Shock Resistance	20 gn in operation 100 gn not in operation
Mounting Position	Any position
Average Consumption In Va	0.82 VA 60 Hz
Control Circuit Voltage Limits	0.8...1.1 Uc AC
[Uc] Control Circuit Voltage	120 V AC 50/60 Hz
Colour Of Cover	Standard
Drop-Out Voltage Threshold	>= 0.3 Uc AC
Load Current	10 A at 250 V AC
Minimum Switching Capacity	500 mW at 100 mA, 5 V DC
Maximum Switching Capacity	2500 VA
Torque Value	0.8 N.m
Contact Resistance	100 mOhm
Insulation Resistance	1000 MOhm at 500 V DC
Electrical Insulation Class	Class F
Mechanical Durability	10000000 cycles

<b>Safety Reliability Data</b>	B10d = 100000
<b>Operating Time</b>	20 ms
<b>Reset Time</b>	20 ms
<b>Overvoltage Category</b>	III
<b>Maximum Switching Voltage</b>	250 V AC 30 V DC
<b>Protection Category</b>	RT I
<b>Operating Rate</b>	<= 1800 cycles/hour under load <= 18000 cycles/hour no-load
<b>Pollution Degree</b>	2
<b>Utilisation Coefficient</b>	20 %
<b>[UI] Rated Insulation Voltage</b>	250 V conforming to IEC 300 V conforming to CSA 300 V conforming to UL
<b>Dielectric Strength</b>	1000 V AC between contacts with micro disconnection 5000 V AC between coil and contact with reinforced insulation
<b>Test Levels</b>	Level A group mounting
<b>Device Presentation</b>	Complete product
<b>Contacts Material</b>	Silver alloy (AgSnO2In2O3)
<b>Net Weight</b>	0.02 kg

## Environment

<b>Standards</b>	UL 508 IEC 61810-1 CSA C22.2 No 14
<b>Product Certifications</b>	CE CSA EAC UL DNV-GL
<b>Ambient Air Temperature For Storage</b>	-40...85 °C
<b>Ambient Air Temperature For Operation</b>	-40...70 °C
<b>Ip Degree Of Protection</b>	IP40
<b>Relative Humidity</b>	10...85 %
<b>Vibration Resistance</b>	3 gn, amplitude = +/- 0.75 mm (f = 10...150 Hz)in operation 5 gn, amplitude = +/- 0.75 mm (f = 10...150 Hz)not in operation

## Packing Units

<b>Unit Type Of Package 1</b>	PCE
<b>Number Of Units In Package 1</b>	1
<b>Package 1 Height</b>	3.45 cm
<b>Package 1 Width</b>	9.25 cm
<b>Package 1 Length</b>	8.6 cm
<b>Package 1 Weight</b>	221 g
<b>Unit Type Of Package 2</b>	BB1
<b>Number Of Units In Package 2</b>	10
<b>Package 2 Height</b>	3.4 cm

Package 2 Width	8.3 cm
Package 2 Length	9 cm
Package 2 Weight	233 g
Unit Type Of Package 3	S01
Number Of Units In Package 3	200
Package 3 Height	15 cm
Package 3 Width	15 cm
Package 3 Length	40 cm
Package 3 Weight	4.95 kg

## Contractual warranty

Warranty	18 months
----------	-----------

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

## Well-being performance

Reach Free Of Svhc

Toxic Heavy Metal Free

Mercury Free

Rohs Exemption Information Yes

## Certifications & Standards

**Reach Regulation**

[REACH Declaration](#)

**Eu Rohs Directive**

Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)

**China Rohs Regulation**

[China RoHS declaration](#)

**Environmental Disclosure**

[Product Environmental Profile](#)


**Circularity Profile**

No need of specific recycling operations

Dimensions Drawings

Dimensions


---

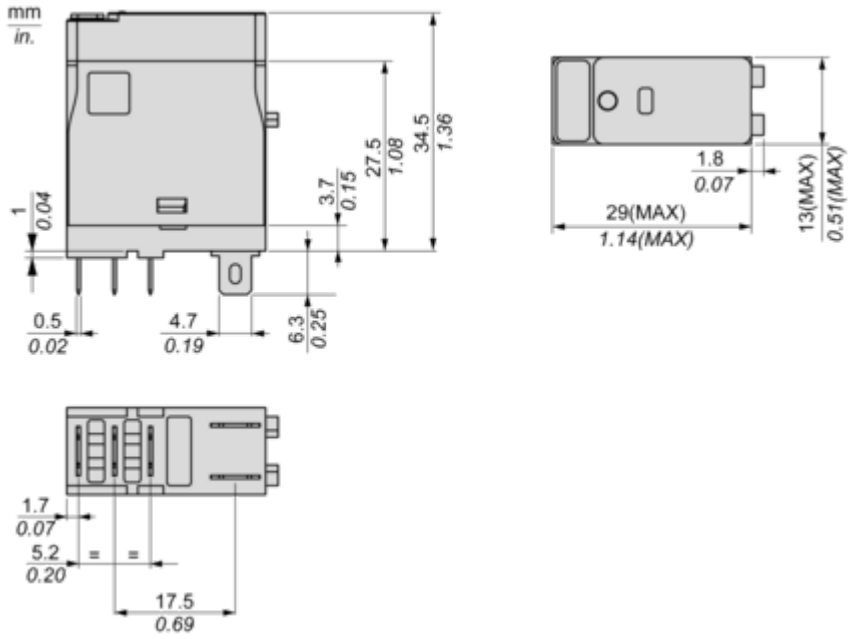

Connections and Schema

Wiring Diagram

---

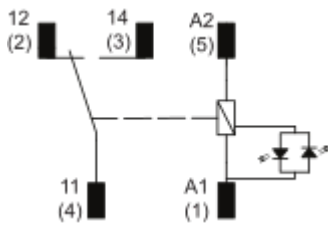


Performance Curves

Performance Curves

---

Maximum Switching Capacity



X : Switching voltage (V)

Y : Switching current (A)

(1) AC Resistive Load


(2) AC Inductive Load  $\cos(\phi)=0.4$

(3) DC Resistive Load

(4) DC Inductive Load (L/R=7ms)

Life Expectancy

Resistive Load




X : Contact Current (A)

Y : Operating Cycle Number

Life Expectancy

Inductive Load

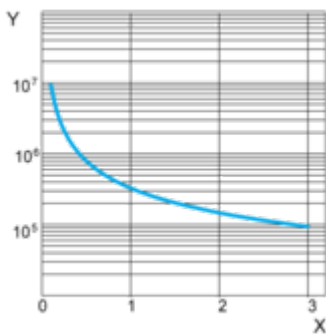

X : Contact Current (A)

Y : Operating Cycle Number


**NOTE:** These are typical curves, actual durability depends on load, environment, duty cycle, etc.



Coil Operating Range

---

AC Coil Operating Range VS Ambient Temperature

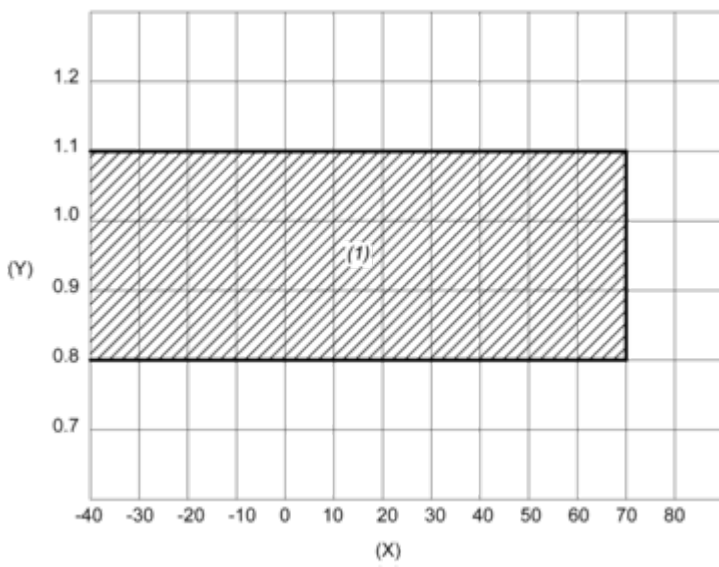

X : Ambient temperature (°C)

Y : Coil voltage (U/U<sub>c</sub>)

(1) Permitted operating range area