

### Wide Selection of Two-circuit Limit Switches

- A wide selection of models are available, including the overtravel models with greater OT, lamp-equipped models for checking operation, low-temperature and heat-resistant models, and microload models.
- Microload models are added to the product lineup.
- Meets EN/IEC standards (only Switches with ground terminals).
- Switches with ground terminals have the CE marking.
- **Approved Standards**



uCE

| Agency        | Standard         | File No. |
|---------------|------------------|----------|
| UL            | UL508            | E76675   |
| CSA           | CSA C22.2 No. 14 | LR45746  |
| TÜV Rheinland | EN60947-5-1      | R9551016 |

**Note:** Contact your OMRON representative for more information on approved models.

## Ordering Information

### ■ Classification

| Specifications |               | Standard             | Overtravel | High-precision | Features   | Page     |
|----------------|---------------|----------------------|------------|----------------|--|----------|
| Actuators      | Roller lever  | Yes                  | Yes        | Yes            | Five models: Roller lever, adjustable roller lever, adjustable rod lever, fork lever lock, rod spring lever.                           | 11 to 25 |
|                | Plunger       | Yes                  | ---        | ---            | Six models: Top plunger, top-roller plunger, top-ball plunger, horizontal plunger, horizontal-roller plunger, horizontal-ball plunger. |          |
|                | Flexible rod  | Yes                  | ---        | ---            | Two models: coil spring and steel wire.  |          |
| Load/contact   | Standard load | SPST-NO/SPST-NC type | Yes        |                | Standard models use a two-circuit double-break switch.   |          |
|                | Microload     | SPST-NO/SPST-NC type | Yes        |                | Specifications include gold-plated contacts.   |          |

| Specifications                             |                    |                      | Standard   | Overtravel        | High-precision   | Features   | Page |
|--|--------------------|----------------------|--|-------------------|--|--|------|
| Environment-resistant models (See note 3.) | Airtight-seal      | WLj -55              | Yes (Cannot be used with heat-resistant and low-temperature models.)                                     |                   |  | Uses an airtight-sealed built-in switch.   | 29   |
|  | Hermetic seal      | Molded terminals     |  |                   |  | WLj -139   |      |
|  |                    | WLj -140<br>WLj -141 |  |                   |  |  |      |
|  | Anti-coolant       | WLj -RP60            |  |                   |  | Lead wires are attached. The case is filled with epoxy resin, to ensure high sealing performance. The Head opening is protected from cutting powder. (WLj -141) Only WLG2, WLC A2, and WLGCA2 can be fabricated. (WLj -141 models.)  |      |
|  | Spatter-prevention |                      | WLj -S   | Yes               | To improve spatter prevention during welding, a heat-resistant resin is used, and screws and rollers are all made from stainless steel.  | 26 to 29   |      |
| Heat-resistive                             |                    | WLj -TH              | Yes (Cannot be used with airtight, hermetic, low-temperature, corrosion-proof, or lamp-equipped models.) |                   | To improve heat resistance, silicone rubber is used for rubber parts and for the built-in switch. The operating temperature range is +5_C to 120_C.  | 29   |      |
| Low-temperature                            |                    | WLj -TC              | Yes (Cannot be used with airtight, hermetic, heat-resistive, corrosion-proof, or lamp-equipped models.)  |                   | To improve low temperature resistance, silicone rubber is used. The operating temperature range is -40_C to 40_C.  |  |      |
| Corrosion-proof (See note 4.)              |                    | WLj -RP              | Yes (Cannot be used with lamp-equipped models.)  |                   | Diecast parts such as the switch box are made of corrosion-proof aluminum. Rubber-sealing parts are made of fluorine rubber and exposed nuts and screws are made of stainless steel. These all aid in resisting oil, chemicals and adverse weather conditions. |  |      |
| Outdoor specifications                     |                    | WLj -P1              | --- (See note 5.)  | Yes (See note 6.) | ---  | Rotary shafts are made of unquenched (i.e., untreated) stainless steel to improve corrosion resistance. Exposed nuts and screws are made of stainless steel and rubber sealing parts of silicone rubber. These factors all combine to create a product which is resistant to temperature changes and adverse weather conditions. |      |
| Lamp-equipped                              |                    | WLj -LE              | Yes  |                   |  | Operating status can be checked at a glance. Lit when operating and not lit when not operating. WLj -LE: 100 VAC/VDC min. WLj -LD: 115 VAC/VDC min. (Refer to page 27 for detailed ratings.)   | 31   |
|  |                    | WLj -LD              | Yes  |                   |  |  |      |
| Relevant pages                             |                    |                      | Pages 11 to 31   |                   |  | ---  | ---  |






- Note:**
- Do not expose to extreme changes in temperature.
  - Standard Models: Operate on each side at an angle of 45\_. Possible to set to one-side operation on either side. Pretravel (PT) is 15\_.  
Overtravel Models: Standard and high-sensitivity models operate on each side at an angle of 80\_. Not possible to set to one-side operation. -2N Series operate on each side at an angle of 90\_. Possible to set to one-side operation on either side.  
High-precision Models: Operate on each side at an angle of 45\_. Possible to set to one-side operation on either side. Pretravel (PT) is 5\_.
  - When ordering, add the suffix for the environment-resistant model or indicator specifications required according to the operating environment and purpose.

4. The overtravel model (-2N Series), fork lever lock model (WLCA32-41 to 44), horizontal plunger (WLSdj ) model, heat-resistive model, low-temperature model, and lamp-equipped model cannot be used with the corrosion-proof model.
5. Outdoor specifications are available for some standard models. Consult your OMRON representative for details.
6. Outdoor specifications are only available for general models and high-sensitivity models.

## ■ List of Models






### Rotating Lever Models

#### Roller Lever Models: Short, Medium, and Long Lever Models

| Type           |                  | Total travel (TT)   | Features   | Actuator (See note 2.)                   |   |   |
|----------------|------------------|---|--|--|---|---|
|                |                  |   |  | WL-1A100 Roller Lever: Short lever (R38) | WL-1A200 Roller Lever: Medium lever (R50) | WL-1A300 Roller Lever: Long lever (R63) |
| Standard       |                  |    | One-side operation is possible. (See note 3.)<br>Head can be mounted in any of the four directions.  | WLCA2                                    | WLCA2-7                                   | WLCA2-8                                 |
| Over-travel    | General          |    | One-side operation is impossible. (See note 3.)<br>Head can be mounted in any of the four directions.  | WLH2                                     | ---                                       | ---                                     |
|                | High-sensitivity |    | One-side operation is possible. (See note 3.)<br>Head can be mounted in any of the four directions.  | WLG2                                     | ---                                       | ---                                     |
|                | -2N Series       |   | One-side operation is possible. (See note 3.)<br>Head can be mounted in any of the two directions. (When the Head can be mounted horizontally, the Head can be mounted in any of the four directions.) | WLCA2-2N                                 | ---                                       | ---                                     |
| High-precision |                  |  | One-side operation is possible. (See note 3.)<br>Head can be mounted in any of the four directions.  | WLGCA2                                   | ---                                       | ---                                     |





- Note:**
1. For the approved standards file numbers, refer to page 1.
  2. For external dimensions and other information, refer to pages 22 to 25.
  3. One-side operation means that three operational directions can be selected electrically, according to the change in direction of the operating plunger. Those models for which one-side operation is impossible can only operate on both sides. For details, see page 39.

Adjustable Roller Levers and Adjustable Rod Levers

| Type        |                  | Total Travel (TT)   | Features  | Actuator (See note 2.)  |   |
|-------------|------------------|---|---|---|---|
|             |                  |   |   | WL-2A100<br>Adjustable<br>Roller Lever<br> | WL-4A100<br>Adjustable Rod<br>Lever (Adjustable<br>length: 25 to<br>140 mm)<br>WL-3A100<br>(Adjustable length:<br>350 to 380 mm)<br> |
| Standard    |                  |  | One-side operation possible. (See note 3.) Head can be mounted in any of the four directions.   | WLCA12  | ---   |
|             |                  |   |   | ---   | WLCL (WL-4A100)   |
| Over-travel | General          |  | One-side operation possible. (See note 3.) Head can be mounted in any of the four directions.   | WLH12   | WLHL (WL-4A100)   |
|             | High-sensitivity |   |   | ---   | WLHAL4 (WL-3A100)   |
|             | -2N Series       |  | One-side operation is possible. (See note 3.) Head can be mounted in any of the two directions. (When the Head can be mounted horizontally, the Head can be mounted in any of the four directions.) | WLCA12-2N   | WLCL-2N (WL-4A100)  |

- Note:**
- For the approved standards file numbers, refer to page 1.
  - For external dimensions and other information, refer to page 22 to 25.
  - One-side operation means that three operational directions can be selected electrically, according to the change in direction of the operating plunger. The operating plunger is set for operation on both sides before delivery. Those models for which one-side operation is impossible can only operate on both sides. For details, see page 39. The operational plunger is factory-set to both sides.


Rod Spring Levers and Fork Lever Locks

| Type        |         | Total travel (TT)   | Features   | Actuator (See note 2.)  |  |
|-------------|---------|---|--|---|--|
|             |         |   |  | WL-3A200 Rod<br>Spring Lever<br> | Fork Lever Locks:<br>WL-5A100,<br>WL-5A102,<br>WL-5A104<br> |
| Protective  |         |  | Head can be mounted in any of the four directions.   | ---   | WLCA32-41 (WL-5A100)   |
|             |         |   |  | ---   | WLCA32-42 (WL-5A102)   |
|             |         |   |  | ---   | WLCA32-43 (WL-5A104)   |
| Over-travel | General |  | One-side operation is possible. (See note 3.) Head can be mounted in any of the four directions. | WLHAL5  | ---  |

- Note:**
- For the approved standard file numbers, refer to page 1.
  - For external dimensions and other information, refer to page 22 to 25.
  - One-side operation means that three operational directions can be selected electrically, according to the change in direction of the operating plunger. The operating plunger is set for operation on both sides before delivery. Those models for which one-side operation is impossible can only operate on both sides. For details, see page 39. The operational plunger is factory-set to both sides.





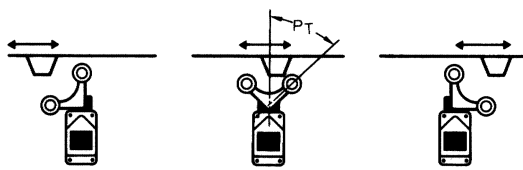

- The fork lever lock is configured so that the dog pushes the lever to reverse the output and this reversed state is maintained even after the dog continues on. If the dog then pushes the lever from the opposite direction, the lever will return to its original position.

Example



NC terminal: ON NO terminal: ON NO terminal: ON

**Standard Plungers**

| Type       | Actuators   | Model                       |
|------------|---|-----------------------------|
| Top        | Top Plunger                | WLD                         |
|            | Top-roller Plunger         | WLD2<br>WLD28 (see note 2.) |
|            | Top-ball Plunger           | WLD3                        |
| Horizontal | Horizontal Plunger         | WLS D                       |
|            | Horizontal-roller Plunger  | WLS D2                      |
|            | Horizontal-ball Plunger    | WLS D3                      |

- Note:** 1. For the approved standards file numbers, refer to page 1.  
2. Sealed roller.

**Model Number Legend**



**1. Electrical Rating**

Blank: Standard  
01: Miniature



**2. Actuator and Head Specifications**

| Symbol  | Actuator type   |
|---------|---|
| CA2     | Roller lever: Standard (R38)  |
| CA2-7   | Roller lever: Standard, medium lever (R50)                                  |
| CA2-8   | Roller lever: Standard, long lever (R63)                                    |
| H2      | Roller lever: Overtravel, general-purpose model, 80_                        |
| G2      | Roller lever: Overtravel, high-sensitivity, 80_                             |
| CA2-2N  | Roller lever: Overtravel, 90_   |
| GCA2    | Roller lever: High-precision  |
| CA12    | Adjustable roller lever: Standard   |
| H12     | Adjustable roller lever: Overtravel, general-purpose model, 80_             |
| G12     | Adjustable roller lever: Overtravel, high-sensitivity, 80_                  |
| CA12-2N | Adjustable roller lever: Overtravel, 90_                                    |
| CL      | Adjustable rod lever: Standard  |
| HL      | Adjustable rod lever: Overtravel, general-purpose model, 80_, 25 to 140 mm  |
| HLAL4   | Adjustable rod lever: Overtravel, general-purpose model, 80_, 350 to 380 mm |
| GL      | Adjustable rod lever: Overtravel, high-sensitivity, 80_, 25 to 140 mm       |
| CL-2N   | Adjustable rod lever: Overtravel, 90_, 25 to 140 mm                         |
| HAL5    | Rod spring lever: Protective, Overtravel, general-purpose model, 80_        |
| CA32-41 | Fork lever lock: Protective, WL-5A100                                       |
| CA32-42 | Fork lever lock: Protective, WL-5A102                                       |
| CA32-43 | Fork lever lock: Protective, WL-5A104                                       |
| D       | Plunger: Top plunger  |
| D2      | Plunger: Top-roller plunger   |
| D28     | Plunger: Top-roller plunger, sealed   |
| D3      | Plunger: Top-ball plunger   |

**Switches without levers**

- WLRCA2
- WLRCA2
- WLRCA2
- WLRH2
- WLRG2
- WLRCA2-2N
- WLRGCA2
- WLRCA2
- WLRH2
- WLRG2
- WLRCA2-2N
- WLRCL
- WLRH2
- WLRH2
- WLRG2
- WLRCA2-2N
- WLRH2
- WLRCA32
- WLRCA32
- WLRCA32
- 
- 
- 
- 

**Standard Flexible Rods**

| Actuators  |                    | Model   |
|--|--------------------|---------|
| Coil spring  | Spring dia. 6.5    | WLNJ    |
|  | Spring dia. 4.8    | WLNJ-30 |
|  | Resin rod dia. 8.0 | WLNJ-2  |
| Steel wire   | 1.0-dia. wire      | WLNJ-S2 |

**Note:** For the approved standards file numbers, refer to page 1.

**Microload Models**

A series of microload models has also been developed for the configurations outlined on pages 3 to 5. The model numbers become WL01j . For example, WLCA2 becomes WL01CA2.

| Symbol | Actuator type                         | Switches without levers |
|--------|---------------------------------------|-------------------------|
| SD     | Plunger: Horizontal plunger           | ---                     |
| SD2    | Plunger: Horizontal-roller plunger    | ---                     |
| SD3    | Plunger: Horizontal-ball plunger      | ---                     |
| NJ     | Flexible rod: Coil spring             | ---                     |
| NJ-30  | Flexible rod: Coil spring, multi-wire | ---                     |
| NJ-2   | Flexible rod: Coil spring, resin rod  | ---                     |
| NJ-S2  | Flexible rod: Steel wire              | ---                     |

### 3. Environment-resistant Model Specifications

|        |                                 |
|--------|---------------------------------|
| Blank: | Standard                        |
| RP:    | Corrosion-proof (See note 1.)   |
| P1:    | Weather-resistant (See note 1.) |

### 4. Built-in Switch Specifications

|        |   |
|--------|---|
| Blank: | General-purpose built-in switch                   |
| 55:    | Hermetically-sealed built-in switch (See note 1.) |

### 5. Temperature Specifications

|        |  |
|--------|--|
| Blank: | Standard: -10_C to 80_C                      |
| TH:    | Heat-resistive: 5_C to 120_C (See note 1.)   |
| TC:    | Low temperature: -40_C to 40_C (See note 1.) |

### 6. Special Hermetic Model Specifications

|        |   |
|--------|---|
| Blank: | No cables or molding  |
| 139:   | General-purpose built-in switch with cables attached and molded conduit opening and cover (cover cannot be removed). (See note 1.)  |
| 140:   | Airtight built-in switch with cables attached and molded conduit opening, cover, and case cover (cover cannot be removed). (See note 1.)  |
| 141:   | Airtight built-in switch with cables attached and molded conduit opening, cover, and case cover (cover cannot be removed). The Head opening is created to protect it from cutting powder. (See note 1.) |
| RP40:  | Airtight built-in switch with cables attached, SC Connector can be used, molded conduit opening, cover, and case cover (cover cannot be removed). (See note 1.)   |
| RP60:  | Airtight built-in switch with cables attached, fluorine rubber-molded conduit opening, cover, and case cover (cover cannot be removed). (See note 1.)   |

### 7. Conduit Size, Ground Terminal Specifications

|        |           |                         |
|--------|-----------|-------------------------|
| Blank: | G 1/2     | Without ground terminal |
| G1:    | G 1/2     | With ground terminal    |
| G:     | Pg13.5    | With ground terminal    |
| Y:     | M20       | With ground terminal    |
| TS:    | 1/2-14NPT | With ground terminal    |

### 8. Indicator Type

|        | Element       | Voltage           | Leakage Current       |
|--------|---------------|-------------------|-----------------------|
| Blank: | No indicators |                   |                       |
| LE:    | Neon lamp     | 125 to 250 VAC    | Approx. 0.6 to 1.9 mA |
| LD:    | LED           | 10 to 115 VAC/VDC | Approx. 1 mA          |

### 9. Lever Type

|        |                             |
|--------|-----------------------------|
| Blank: | Allen-head lever (standard) |
| A:     | Double nut lever            |

### 10.

|        |                                   |
|--------|-----------------------------------|
| Blank: | Standard                          |
| S:     | Spatter-proof model (See note 2.) |

### 11. Conduit Wiring Specifications

|           |   |
|-----------|---|
| Blank:    | Screw-tightened terminal (G1/2 conduit)                     |
| K13:      | Direct-wired Connector (2-core, DC)                         |
| K13A:     | Direct-wired Connector (2-core, AC)                         |
| K43:      | Direct-wired Connector (4-core, DC)                         |
| K43A:     | Direct-wired Connector (4-core, AC)                         |
| -M1J:     | Pre-wired Connector (2-core, DC) with 0.3-m cable attached. |
| -AGJ03:   | Pre-wired Connector (4-core, AC) with 0.3-m cable attached. |
| -DGJ03:   | Pre-wired Connector (4-core, DC) with 0.3-m cable attached. |
| -DK1EJ03: | Pre-wired Connector (3-core, DC) with 0.3-m cable attached. |

- Note:**
1. For information on applicable models, see page 29 to 31.
  2. For information on applicable models, see pages 26 to 29.

# General-purpose Models


These Limit Switches are two-circuit double-break switches housed in rugged diecast, thus making it an oil-tight, waterproof and dust-proof construction (complies with IP67).

In addition to the standard models, microload models are also available.

A wide range of actuators with a range of functions are available; rotating lever, plunger, flexible rod etc.

The rubber material in the standard models is designed to be resistant to water and most oils.

## ■ Nomenclature

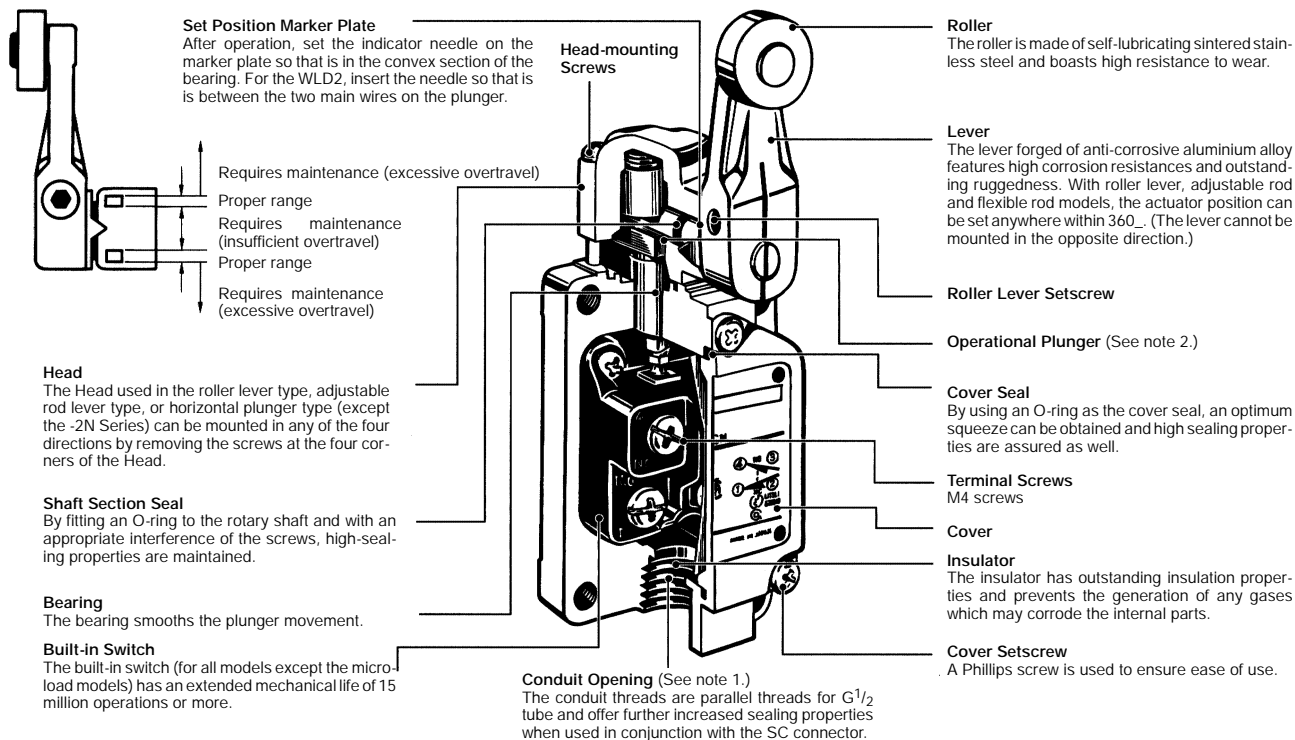

- Note:**
1. The display for conduit threads has changed from PF<sup>1</sup>/<sub>2</sub> to G<sup>1</sup>/<sub>2</sub>, according to revisions of JIS B 0202. This is only a change in the display, so the thread size and pitch have not changed. (Conduit threads Pg 13.5 and <sup>1</sup>/<sub>2</sub>-14NPT are also available.)
  2. By changing the orientation of the operational plunger, three operational directions can be selected electrically. (This is only possible with general-purpose roller lever, adjustable roller lever, and adjustable rod lever models. For the overtravel models, only -2N Series models have this function.)

## ■ Ratings

| Type  | Rated voltage | Non-inductive load |      |           |       | Inductive load |    |            |       |
|---|---------------|--------------------|------|-----------|-------|----------------|----|------------|-------|
|   |               | Resistive load     |      | Lamp load |       | Inductive load |    | Motor load |       |
|   |               | NC                 | NO   | NC        | NO    | NC             | NO | NC         | NO    |
| Standard, overtravel (except high-sensitivity models), and high-precision models. | 125 VAC       | 10 A               | 10 A | 3 A       | 1.5 A | 10 A           |    | 5 A        | 2.5 A |
|   | 250 VAC       | 10 A               | 10 A | 2 A       | 1 A   | 10 A           |    | 3 A        | 1.5 A |
|   | 500 VAC       | 10 A               | 10 A | 1.5 A     | 0.8 A | 3 A            |    | 1.5 A      | 0.8 A |
|   | 8 VDC         | 10 A               |      | 6 A       | 3 A   | 10 A           |    | 6 A        |       |
|   | 14 VDC        | 10 A               |      | 6 A       | 3 A   | 10 A           |    | 6 A        |       |
|   | 30 VDC        | 6 A                |      | 4 A       | 3 A   | 6 A            |    | 4 A        |       |
|   | 125 VDC       | 0.8 A              |      | 0.2 A     | 0.2 A | 0.8 A          |    | 0.2 A      |       |
|   | 250 VDC       | 0.4 A              |      | 0.1 A     | 0.1 A | 0.4 A          |    | 0.1 A      |       |
| Overtravel (high-sensitivity)   | 125 VAC       | 5 A                |      | ---       |       | ---            |    | ---        |       |
|   | 250 VAC       | 5 A                |      | ---       |       | ---            |    | ---        |       |
|   | 125 VDC       | 0.4 A              |      | ---       |       | ---            |    | ---        |       |
|   | 250 VDC       | 0.2 A              |      | ---       |       | ---            |    | ---        |       |

- Note:**
1. The above figures are for standard currents.
  2. Inductive loads have a power factor of 0.4 min. (AC) and a time constant of 7 ms max. (DC).
  3. Lamp load has an inrush current of 10 times the steady-state current.

- 4. Motor load has an inrush current of 6 times the steady-state current.
- 5. For PC loads, use the microload models.

|                |    |                                  |
|----------------|----|----------------------------------|
| Inrush current | NC | 30 A max. (15 A max. (see note)) |
|                | NO | 20 A max. (10 A max. (see note)) |


Note: Only for high-sensitivity overtravel models.

**Microload Models**

| Rated voltage | Resistive load |
|---------------|----------------|
| 125 VAC       | 0.1 A          |
| 30 VDC        |                |

Operation within the three zones illustrated in the following diagram will produce optimum performance.

Recommended Load Range: 5 to 30 VDC, 0.5 to 100 mA

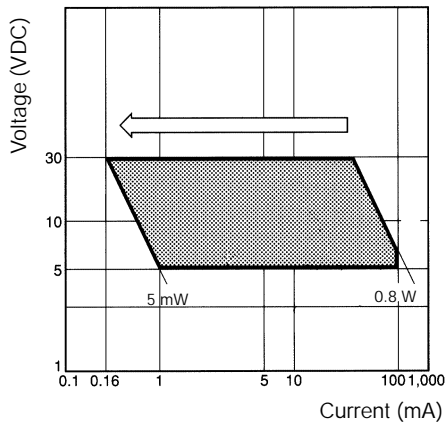

**Ground Terminal Models**



WL  $\frac{\square}{1}$  -  $\frac{\square}{2}$

- 1: Type of actuator
  - 2: Conduit opening size
- The models differ depending on the size of the case's conduit thread.

| Model | Conduit opening size |
|-------|----------------------|
| G1    | G 1/2                |
| G     | Pg 13.5              |
| Y     | M20                  |
| TS    | 1/2-14NPT            |

**Contact Form**

Standard (WLj )/Microload (WL01j ) Models





## ■ Approved Standard Ratings

### UL/CSA

Standard Models: A600

| Rated voltage | Carry current | Current |       | Volt-amperes |        |
|---------------|---------------|---------|-------|--------------|--------|
|               |               | Make    | Break | Make         | Break  |
| 120 VAC       | 10 A          | 60 A    | 6 A   | 7,200 VA     | 720 VA |
| 240 VAC       |               | 30 A    | 3 A   |              |        |
| 480 VAC       |               | 15 A    | 1.5 A |              |        |
| 600 VAC       |               | 12 A    | 1.2 A |              |        |

Microload Models:

0.1 A 125 VAC, 0.1 A 30 VDC

### TÜV (EN60947-5-1)

(Only Ground Terminal Models are Approved)

| Model       | Category/rating                      | Thermal current | Indicator |
|-------------|--------------------------------------|-----------------|-----------|
| WLj -j      | AC-15 2 A/250 V<br>DC12 2 A/48 V     | 10 A            | ---       |
| WL01j -j    | AC-14 0.1 A/125 V<br>DC12 0.1 A/48 V | 0.5 A           | ---       |
| WLj -j LE   | AC-15 2 A/250 V                      | 10 A            | Neon lamp |
| WL01j -j LE | AC-14 0.1 A/125 V                    | 0.5 A           | Neon lamp |
| WLj -j LD   | AC-15 2 A/115 V<br>DC12 2 A/48 V     | 10 A            | LED       |
| WL01j -j LD | AC-14 0.1 A/115 V<br>DC12 0.1 A/48 V | 0.5 A           | LED       |

**Note:** As an example, AC-15 2 A/250 V means the following:

|                              |       |
|------------------------------|-------|
| Application category         | AC-15 |
| Rated operating current (Ie) | 2 A   |
| Rated operating voltage (Ue) | 250 V |

■ Characteristics


|   |  |
|---|--|
| Degree of protection                                      | IP67   |
| Life expectancy (see note 3)                              | Mechanical: 15,000,000 operations min. (see note 4)<br>Electrical: 750,000 operations min. (see note 5)  |
| Operating speed   | 1 mm to 1 m/s (for WLCA2)  |
| Operating frequency                                       | Mechanical: 120 operations/minute min.<br>Electrical: 30 operations/minute min.  |
| Rated frequency   | 50/60 Hz   |
| Insulation resistance                                     | 100 MΩ min. (at 500 VDC)   |
| Contact resistance  | 25 mΩ max. (initial value)   |
| Dielectric strength                                       | 1,000 VAC (600 VAC), 50/60 Hz for 1 min between non-continuous terminals.<br>2,200 VAC, 50/60 Hz for 1 min/Uimp 2.5 kV non-current-carrying metal part and ground.<br>2,200 VAC, 50/60 Hz for 1 min/Uimp 2.5 kV between each terminal and non-current-carrying metal part. |
| Rated insulation voltage (U <sub>i</sub> )                | 250 V (EN60947-5-1)  |
| Switching overvoltage                                     | 1,000 V max. (EN60947-5-1)   |
| Pollution degree (operating environment)                  | 3 (EN60947-5-1)  |
| Short-circuit protective device (SCPD)                    | 10 A, fuse type gG or gI (IEC269)  |
| Conditional short-circuit current                         | 100 A (EN60947-5-1)  |
| Conventional enclosed thermal current (I <sub>the</sub> ) | 10 A, 0.5 A (EN60947-5-1)  |
| Protection against electric shock                         | Class I  |
| Vibration resistance                                      | 10 to 55 Hz, 1.5-mm double amplitude (see note 6)  |
| Shock resistance  | Destruction: 1,000 m/s <sup>2</sup> min.<br>Malfunction: 300 m/s <sup>2</sup> min. (see note 6)  |
| Ambient temperature                                       | Operating: -10°C to 80°C (with no icing) (see note 7)  |
| Ambient humidity  | Operating: 95% max.  |
| Weight  | Approx. 275 g (in the case of WLCA2)   |

- Note:
1. The above figures are initial values.
  2. The figures in parentheses for dielectric strength, are those for the overtravel (high-sensitivity) model.
  3. Life expectancy values are calculated at an operating temperature of 5°C to 35°C, and an operating humidity of 40% to 70%. Contact your OMRON sales representative for more detailed information on other operating environments.
  4. 10,000,000 operations min. for general, high-sensitivity, and flexible rod overtravel models.
  5. 500,000 operations min. for high-precision and outdoor specifications models. All microload models however, are 1,000,000 operations min.
  6. Except the flexible rod models.
  7. For low temperature models this is -40\_C to 40°C (no icing). For heat-resistive models the range is +5°C to 120°C.

Engineering Data

Electrical Life Expectancy

Operating temperature: 5°C to 30°C  
Operating humidity: 40% to 70%.

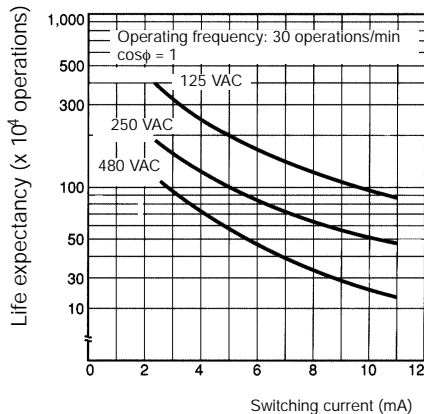


# Standard Models

## ■ Dimensions/Operating Characteristics

- Note: 1. Rotating Lever Models: For all models WLj indicates a standard model and WL01j indicates a microload model.  
 2. Unless otherwise indicated, a tolerance of  $\pm 0.4$  mm applies to all dimensions.

### Roller Lever


WLCA2  
WL01CA2

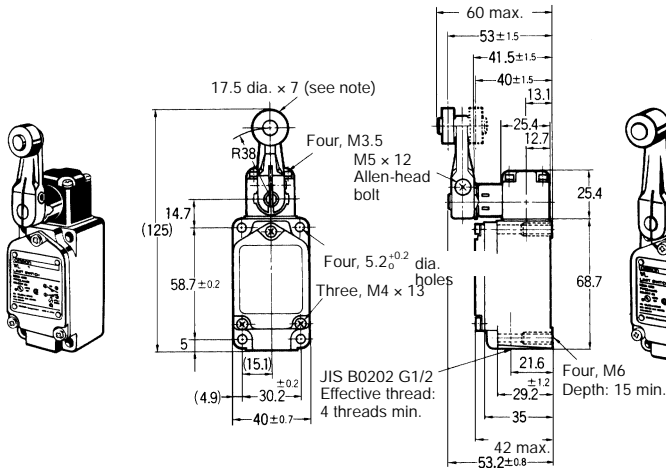

Note: Stainless sintered roller

### Roller Lever


WLCA2-7  
WL01CA2-7

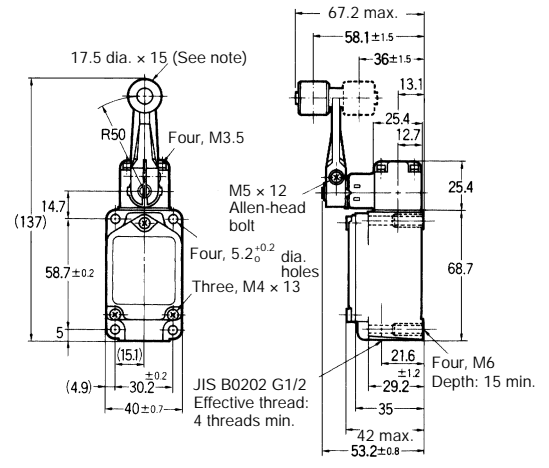

Note: Stainless steel roller

### Roller Lever


WLCA2-8  
WL01CA2-8

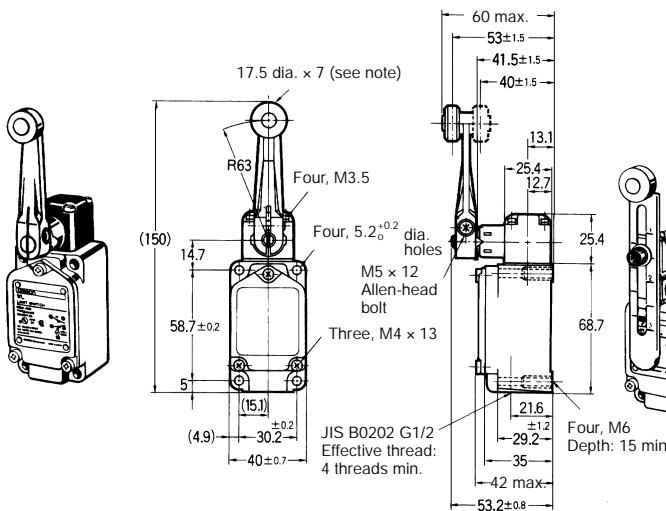

Note: Stainless sintered roller

### Adjustable Roller Lever

WLCA12  
WL01CA12

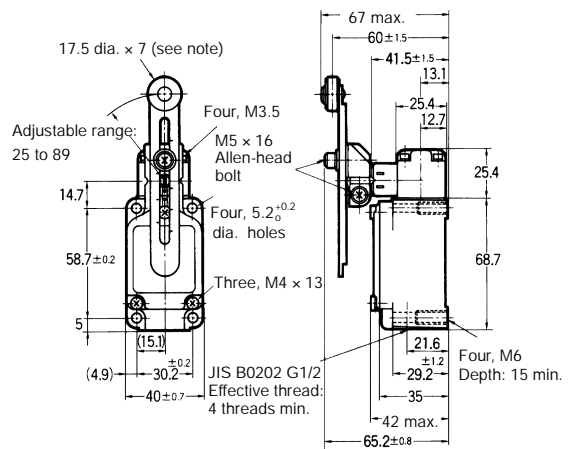

Note: Stainless sintered roller

| Operating characteristics      | WLCA2<br>WL01CA2 | WLCA2-7<br>WL01CA2-7 | WLCA2-8<br>WL01CA2-8 | WLCA12<br>WL01CA12<br>(see note) |
|--------------------------------|------------------|----------------------|----------------------|----------------------------------|
| Operating force: OF max.       | 13.34 N          | 10.2 N               | 8.04 N               | 13.34 N                          |
| Release force: RF min.         | 2.23 N           | 1.67 N               | 1.34 N               | 2.23 N                           |
| Pretravel: PT                  | 15±5°            | 15±5°                | 15±5°                | 15±5°                            |
| Overtravel: OT min.            | 30°              | 30°                  | 30°                  | 30°                              |
| Movement differential: MD max. | 12°              | 12°                  | 12°                  | 12°                              |

Note: The operating characteristics for WLCA12 and WL01CA12 are measured at the lever length of 38 mm.


OF and RF for WLCA12, with a lever length of 89 mm.

| Operating characteristics | WLCA12, WL01CA12 |
|---------------------------|------------------|
| OF                        | 5.68 N           |
| RF                        | 0.95 N           |

Rotating Lever Models: For all models WL indicates a standard model and WL01j indicates a microload model.

**Adjustable Rod Lever**


WLCL  
WL01CL

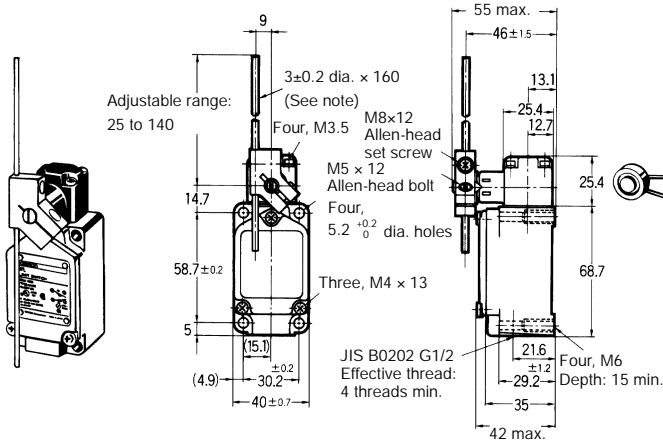


Note: Stainless steel rod

**Fork Lever Lock**

WLCA32-41 to 44  
WL01CA32-41 to 44  
(For details see page 4.)

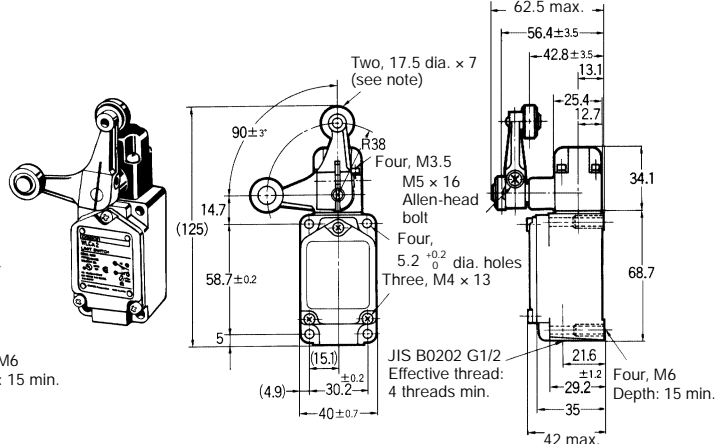


Note: Plastic roller. This illustration shows the external dimensions of the WLCA32-41. (Models WLCA32-041 to -044 have stainless steel rollers.)



- Note:
1. Unless otherwise indicated, a tolerance of  $\pm 0.4$  mm applies to all dimensions.
  2. The fork lever lock is configured so that the dog pushes the lever to reverse the output and this reversed state is maintained even after the dog continues on. If the dog then pushes the lever from the opposite direction, the lever will return to its original position.

Example

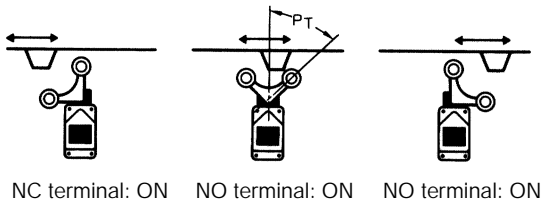

| Operating characteristics      | WLCL, WL01CL |
|--------------------------------|--------------|
| Operating force: OF max.       | 1.39 N       |
| Release force: RF min.         | 0.27 N       |
| Pretravel: PT                  | 15 $\pm$ 5°  |
| Overtravel: OT min.            | 30°          |
| Movement differential: MD max. | 12°          |


Note: The operating characteristics for WLCA12 and WL01CA12 are measured at the lever length of 140 mm.

| Operating characteristics                                   | WLCA32-41 to 44, WL01CA32-41 to 44 |
|---|------------------------------------|
| Force necessary to reverse the direction of the lever: Max. | 11.77 N}                           |
| Movement until the lever reverses                           | 50 $\pm$ 5°                        |
| Movement until switch operation: Max.                       | 55°                                |
| Movement after switch operation: Min.                       | 35°                                |

**Note:** 1. Plunger Models: For all models WLj indicates a standard model and WL01j indicates a microload model.  
 2. Unless otherwise indicated, a tolerance of ±0.4 mm applies to all dimensions.

**Top Plunger**


WLD  
 WL01D

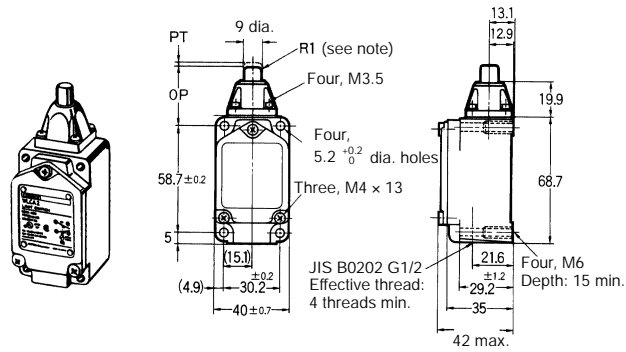

**Note:** Stainless steel plunger

**Horizontal Plunger**


WLS  
 WL01S

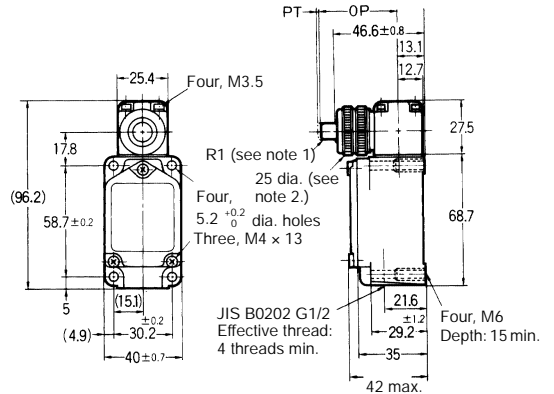

**Note:** 1. Stainless steel plunger  
 2. Cosmetic nuts.

**Top-roller Plunger**


WLD2  
 WL01D2

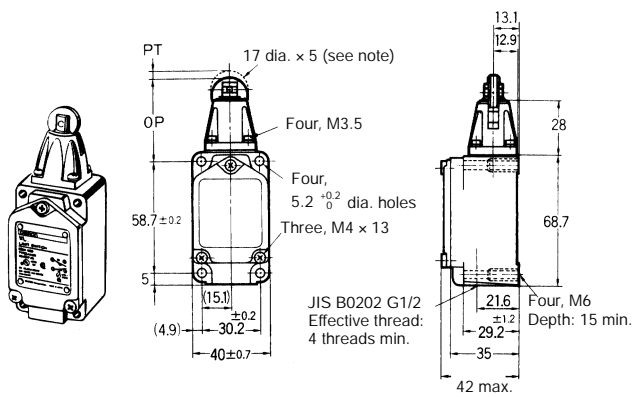

**Note:** Stainless sintered roller

**Horizontal-roller Plunger**

WLS2  
 WL01SD2

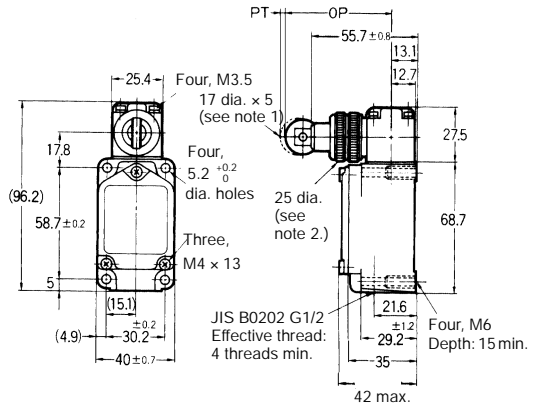


**Note:** 1. Stainless sintered roller  
 2. Cosmetic nuts  
 3. The WLS21 model, which has the roller rotated by 90° is also available.

Note: Unless otherwise indicated, a tolerance of  $\pm 0.4$  mm applies to all dimensions.

**Top-ball Plunger**


WLD3  
WL01D3

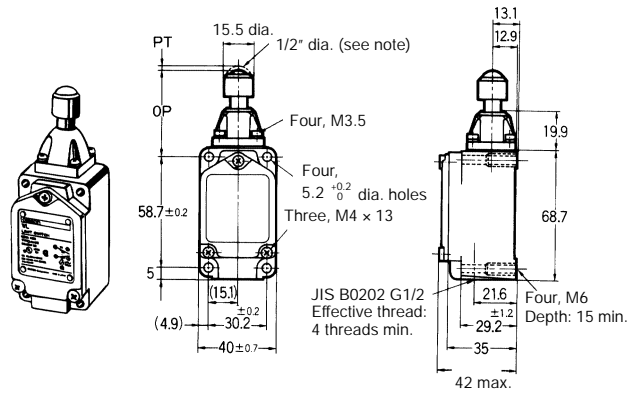

Note: Stainless steel ball

**Horizontal-ball Plunger**


WLSD3  
WL01SD3

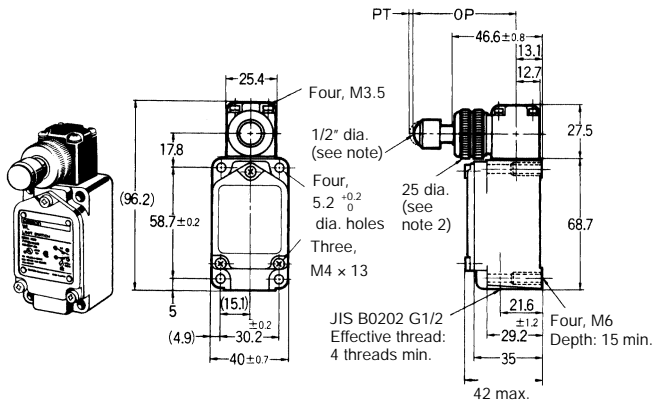

Note: 1. Stainless steel ball  
2. Cosmetic nuts

**Sealed Top-roller Plunger**

WLD28  
WL01D28

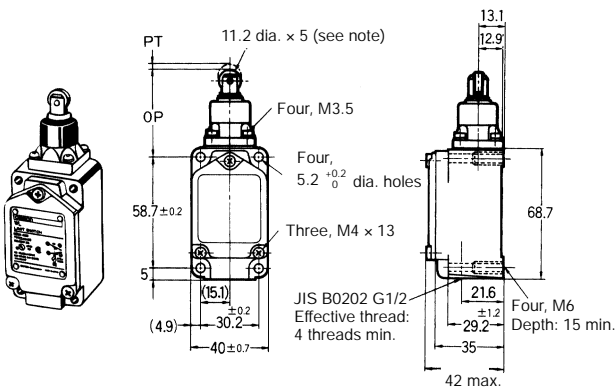


Note: Stainless steel ball

| Operating characteristics       | WLD<br>WL01D    | WLD2<br>WL01D2  | WLD3<br>WL01D3    | WLD28<br>WL01D28 | WLSD2<br>WL01SD2  | WLSD3<br>WL01SD3  | WLSD<br>WL01SD    |
|---------------------------------|-----------------|-----------------|-------------------|------------------|-------------------|-------------------|-------------------|
| Operating force: OF max.        | 26.67 N         | 26.67 N         | 26.67 N           | 16.67 N          | 40.03 N           | 40.03 N           | 40.03 N           |
| Release force: RF min.          | 8.92 N          | 8.92 N          | 8.92 N            | 4.41 N           | 8.89 N            | 8.89 N            | 8.89 N            |
| Pretravel: PT max.              | 1.7 mm          | 1.7 mm          | 1.7 mm            | 1.7 mm           | 2.8 mm            | 2.8 mm            | 2.8 mm            |
| Overtravel: OT min.             | 6.4 mm          | 5.6 mm          | 4 mm              | 5.6 mm           | 5.6 mm            | 4 mm              | 6.4 mm            |
| Movement differential: MD max.  | 1 mm            | 1 mm            | 1 mm              | 1 mm             | 1 mm              | 1 mm              | 1 mm              |
| Operating position: OP          | 34 $\pm$ 0.8 mm | 44 $\pm$ 0.8 mm | 44.5 $\pm$ 0.8 mm | 44 $\pm$ 0.8 mm  | 54.2 $\pm$ 0.8 mm | 54.1 $\pm$ 0.8 mm | 40.6 $\pm$ 0.8 mm |
| Total travel position: TTP max. | 29.5 mm         | 39.5 mm         | 41 mm             | 39.5 mm          | ---               | ---               | ---               |

**Note:** 1. Flexible Rod Models: For all models WLj indicates a standard model and WL01j indicates a microload model.  
 2. Unless otherwise indicated, a tolerance of ±0.4 mm applies to all dimensions.

**Coil Spring**


WLNJ  
WL01NJ

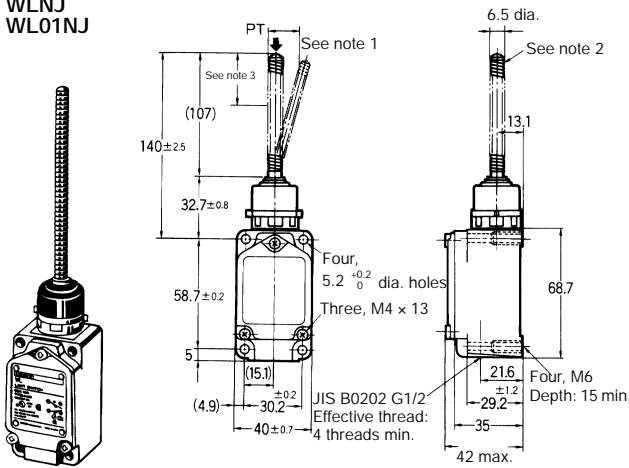

**Note:** 1. The coil spring may be operated from any direction except the axial direction (↓).  
 2. Stainless steel coil spring  
 3. Optimum operating range of the coil spring is within 1/3 of the entire length from the top end.

**Coil Spring (Multi-wire)**


WLNJ-30  
WL01NJ-30

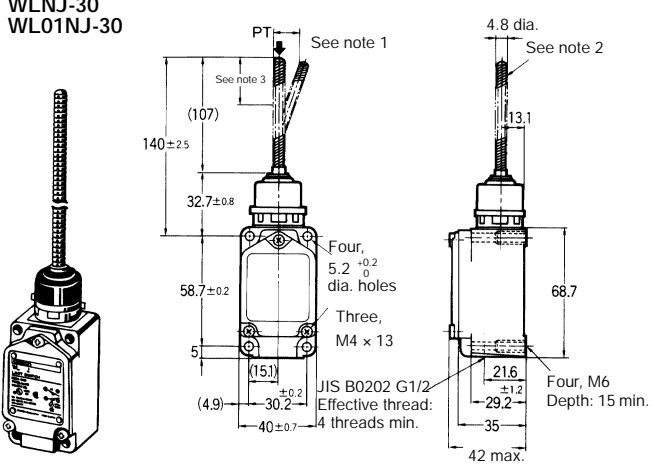

**Note:** 1. The coil spring may be operated from any direction except the axial direction (↓).  
 2. Piano wire coil  
 3. Optimum operating range of the coil spring is within 1/3 of the entire length from the top end.

**Coil Spring (Resin Rod)**


WLNJ-2  
WL01NJ-2

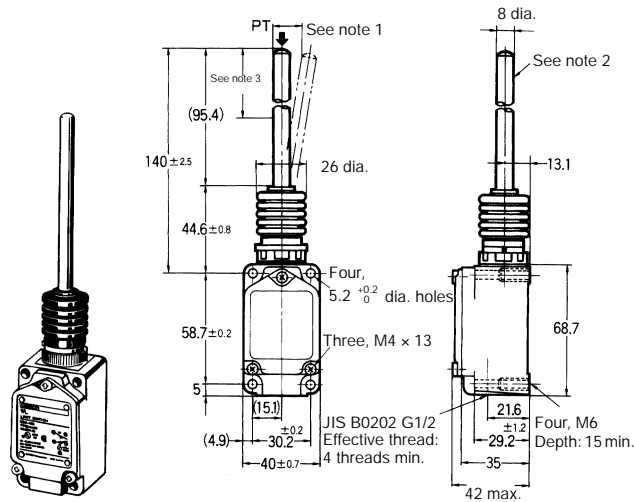

**Note:** 1. The coil spring may be operated from any direction except the axial direction (↓).  
 2. Polyamide resin rod  
 3. Optimum operating range of the rod is within 1/3 of the entire length from the top end.

**Steel Wire**

WLNJ-S2  
WL01NJ-S2

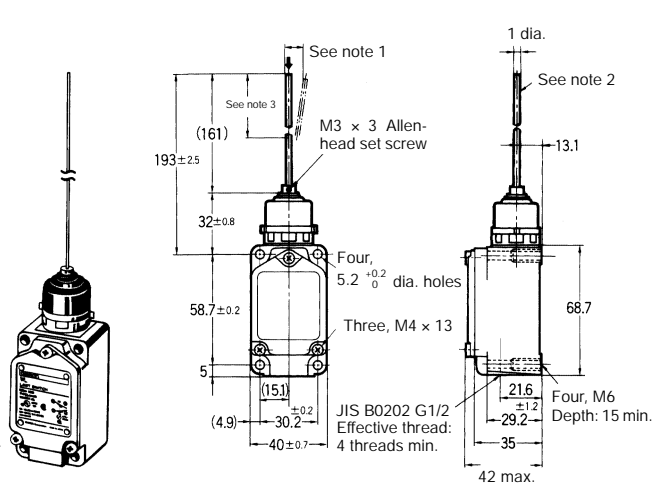

**Note:** 1. The coil spring may be operated from any direction except the axial direction (↓).  
 2. Stainless steel wire  
 3. Optimum operating range of the wire is within 1/3 of the entire length from the top end.

| Operating characteristics | WLNJ<br>WL01NJ<br>(see note) | WLNJ30<br>WL01NJ30<br>(see note) | WLNJ-2<br>WL01NJ-2<br>(see note) | WLNJ-S2<br>WL01NJ-S2<br>(see note) |
|---------------------------|------------------------------|----------------------------------|----------------------------------|------------------------------------|
| Operating force: OF max.  | 1.47 N                       | 1.47 N                           | 1.47 N                           | 0.28 N                             |
| Pretravel: PT             | 20±10 mm                     | 20±10 mm                         | 40±20 mm                         | 40±20 mm                           |

**Note:** These values are taken from the top end of the wire or spring.

# Overtravel Models



Overtravel models are Limit Switches which are provided with a greater OT to facilitate dog setting.

The overtravel models are classified into three types; general-purpose, high-sensitivity, and models which are capable of one-side 90° operation, the -2N Series.

The -2N Series can also be installed on either side.

Since this model is identical to the standard model in dimensions, both models are interchangeable.

Like the standard model, it is oil-tight, waterproof, and dustproof (complies with IP67).

| Overtravel Models (1)   | Overtravel Models (2)   |
|---|---|
| General-purpose, high sensitivity models  | -2N Series  |
|    |    |
| Head can be mounted in any of the four directions.<br>The lever operates on either side at 80°. One-side operation is impossible. | The Head can be mounted in two directions, forward and backward.<br>The lever operates on either side at 90°. One side operation is possible. |


## Overtravel Models (1) General-purpose/High Sensitivity Models

### ■ Dimensions/Operating Characteristics

- Note:**
1. For all models WLj indicates a standard model and WL01j indicates a microload model.
  2. One-side operation is not possible with the general-purpose and high-sensitivity models.
  3. Unless otherwise indicated, a tolerance of ±0.4 mm applies to all dimensions.

#### Roller Lever


WLH2  
WL01H2  
WLG2  
WL01G2

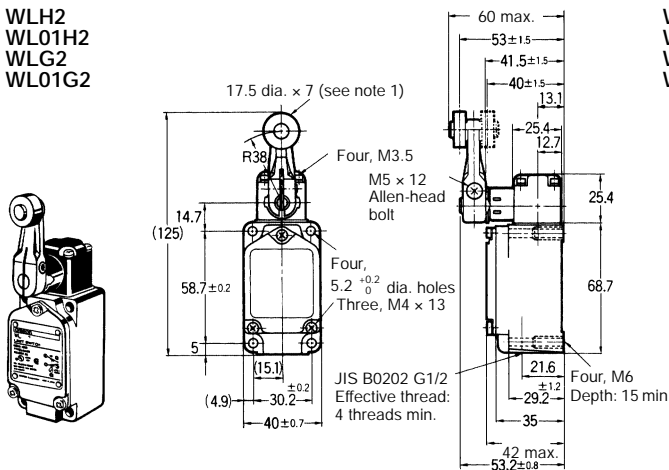

- Note:**
1. Stainless sintered roller
  2. WLj G2 is identical to other models except in the shape of the set position marker plate.
  3. The built-in switch for WLH2 is W-10FB3.
  4. The built-in switch for WLG2 is W-10FB3-8.

#### Adjustable Rod Lever

WLHL  
WL01HL  
WLGL  
WL01GL

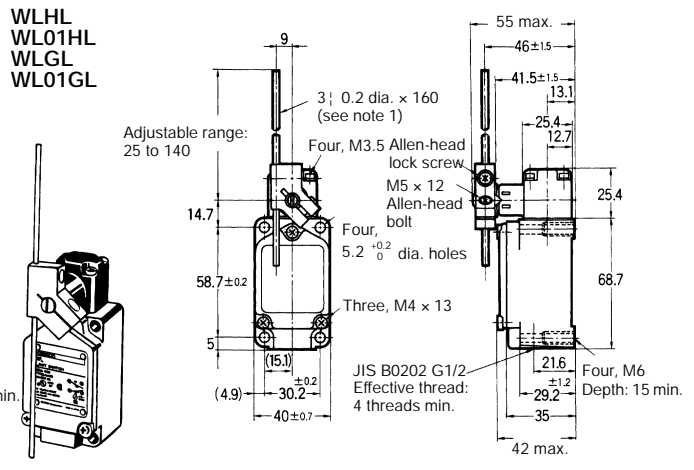


- Note:**
1. WLj GL is identical to other models except in the shape of the set position marker plate.
  2. The built-in switch for WLHL is W-10FB3.
  3. The built-in switch for WLGL is W-10FB3-8.



### Adjustable Roller Lever

WLH12  
 WL01H12  
 WLG12  
 WL01G12

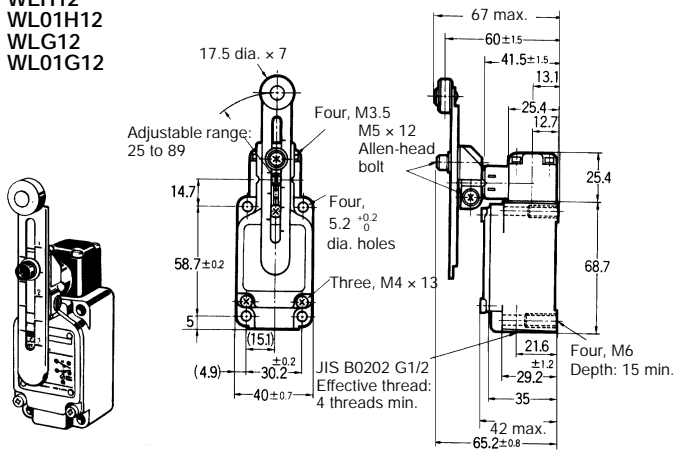

- Note:**
1. Stainless sintered roller
  2. WLj G12 is identical to other models except in the shape of the set position marker plate.
  3. The built-in switch for WLH12 is W-10FB3.
  4. The built-in switch for WLG12 is W-10FB3-8.

| Operating characteristics      | WLH2<br>WL01H2 | WLG2<br>WL01G2                  | WLH12<br>WL01H12<br>(see note 1) | WLG12<br>WL01G12<br>(see note 1) | WLHL<br>WL01HL<br>(see note 2) | WLGL<br>WL01GL<br>(see note 2)  |
|--------------------------------|----------------|---------------------------------|----------------------------------|----------------------------------|--------------------------------|---------------------------------|
| Operating force: OF max.       | 9.81 N         | 9.81 N                          | 9.81 N                           | 9.81 N                           | 2.84 N                         | 2.84 N                          |
| Release force: RF min.         | 0.98 N         | 0.98 N                          | 0.98 N                           | 0.98 N                           | 0.25 N                         | 0.25 N                          |
| Pretravel: PT                  | 15±5°          | 10° <sup>+2</sup> <sub>-1</sub> | 15±5°                            | 10° <sup>+2</sup> <sub>-1</sub>  | 15±5°                          | 10° <sup>+2</sup> <sub>-1</sub> |
| Overtravel: OT min.            | 55°            | 65°                             | 55°                              | 65°                              | 55°                            | 65°                             |
| Movement differential: MD max. | 12°            | 7°                              | 12°                              | 7°                               | 12°                            | 7°                              |

- Note:**
1. The operating characteristics of WLH12, WL01HL12, WLG12, and WL01G12 are measured at the lever length of 38 mm.
  2. The operating characteristics of WLHL, WL01HL, WLGL, and WL01GL are measured at the rod length of 140 mm.


OF and RF for WLH12 and WL01H12, with a lever length of 89 mm.

| Operating characteristics | WLH12,<br>WL01H12 | WLG12,<br>WL01G12 |
|---------------------------|-------------------|-------------------|
| OF                        | 4.18 N            | 4.18 N            |
| RF                        | 0.42 N            | 0.42 N            |

- Note:** 1. For all models WLj indicates a standard model and WL01j indicates a microload model.  
 2. Unless otherwise indicated, a tolerance of ±0.4 mm applies to all dimensions.

**Adjustable Rod Lever**


WLHAL4  
 WL01HAL4

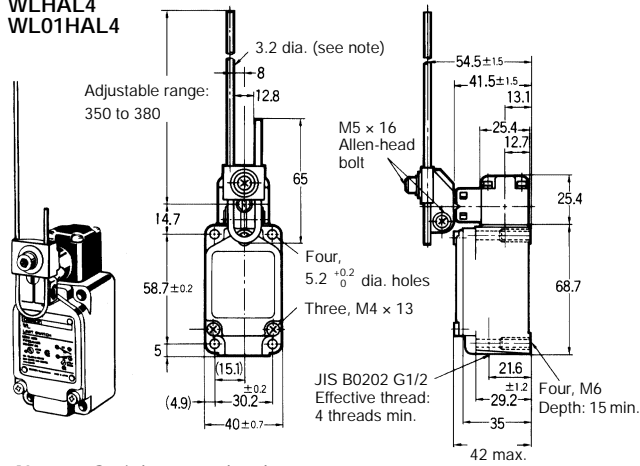

**Note:** Stainless steel rod

**Rod Spring Lever**

WLHAL5  
 WL01HAL5

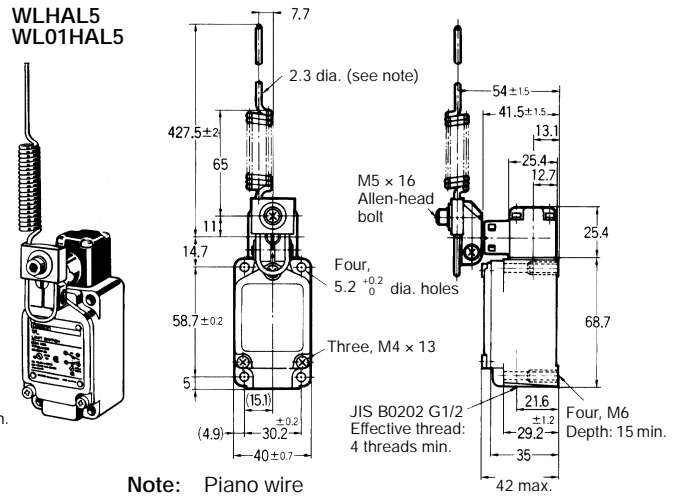

**Note:** Piano wire

| Operating characteristics      | WLHAL4<br>WL01HAL4<br>(see note 2) | WLHAL5<br>WL01HAL5 |
|--------------------------------|------------------------------------|--------------------|
| Operating force: OF max.       | 0.98 N                             | 0.90 N             |
| Release force: RF min.         | 0.15 N                             | 0.09 N             |
| Pretravel: PT                  | 15±5°                              | 15±5°              |
| Overtravel: OT min.            | 55°                                | 55°                |
| Movement differential: MD max. | 12°                                | 12°                |

- Note:** 1. With WLHAL4, WL01HAL4, WLHAL5, and WL01HAL5, the actuator's tare is large, so depending on the installation direction, they may not be properly reset. Always install so that the actuator is facing downwards.  
 2. The operating characteristics of WLHAL4, and WL01HAL4 are measured at the rod length of 380 mm.

# Overtravel Models (2) -2N Series


-2N Series (90° operation on one side is possible by simply changing the direction of the cam.)

## ■ Dimensions/Operating Characteristics

- Note:** 1. For all models WLj indicates a standard model and WL01j indicates a microload model.  
 2. With the -2N Series, 90° operation on one side is possible by simply changing the direction of the cam.  
 3. Unless otherwise indicated, a tolerance of ±0.4 mm applies to all dimensions.

### Roller Lever


WLCA2-2N  
WL01CA2-2N

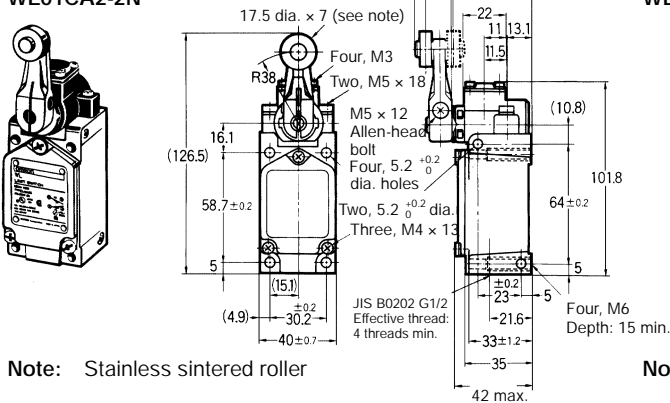

**Note:** Stainless sintered roller

### Adjustable Roller Lever


WLCA12-2N  
WL01CA12-2N

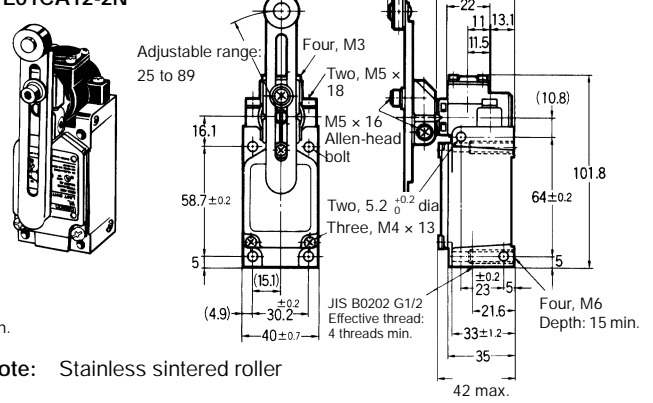

**Note:** Stainless sintered roller

### Adjustable Rod Lever

WLCL-2N  
WL01CL-2N

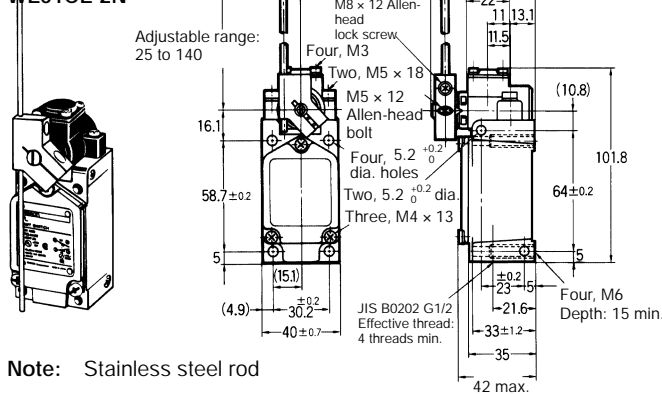

**Note:** Stainless steel rod


| Operating characteristics      | WLCA2-2N<br>WL01CA2-2N | WLCA12-2N<br>WL01CA12-2N<br>(see note 1) | WLCL-2N<br>WL01CL-2N<br>(see note 2) |
|--------------------------------|------------------------|--|--------------------------------------|
| Operating force: OF max.       | 9.61 N                 | 9.61 N                                   | 2.84 N                               |
| Release force: RF min.         | 1.18 N                 | 1.18 N                                   | 0.25 N                               |
| Pretravel: PT max.             | 20°                    | 20°                                      | 20°                                  |
| Overtravel: OT min.            | 70°                    | 70°                                      | 70°                                  |
| Movement differential: MD max. | 10°                    | 10°                                      | 10°                                  |

- Note:** 1. The operating characteristics of WLCA12-2N and WL01CA12-2N are measured at the lever length of 38 mm.  
 2. The operating characteristics of WLCL-2N and WL01CL-2N are measured at the rod length of 140 mm.

OF and RF for WLCA12-2N and WL01CA12-2N, with a lever length of 89 mm.

| Operating characteristics | WLCA12-2N, WL01CA12-2N |
|---------------------------|------------------------|
| OF                        | 4.10 N                 |
| RF                        | 0.50 N                 |

**Cam direction changing procedure**

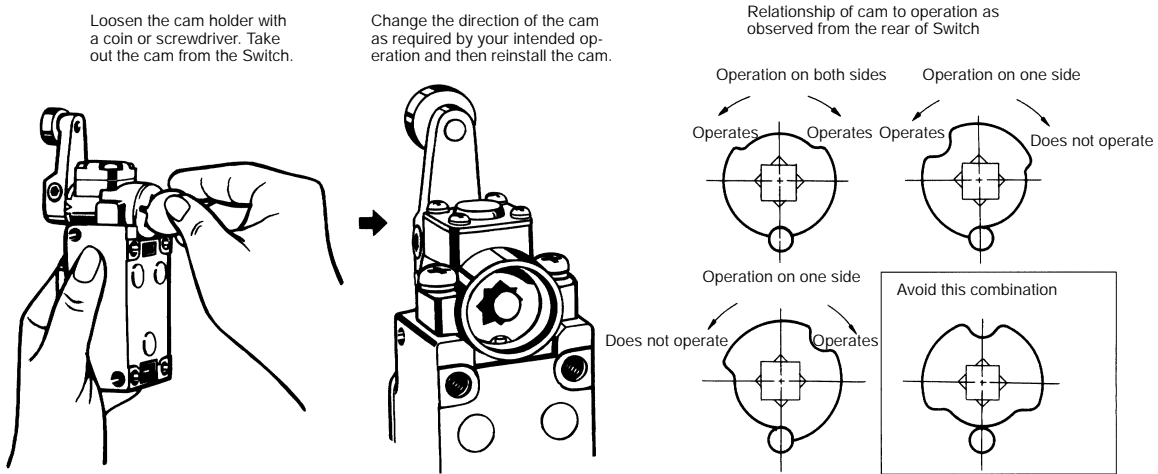

**High-precision Models**

The high-precision models feature a pretravel of 5° (as compared with 15° for the standard models) and a repeat accuracy twice as great as standard models. The high-precision models are ideal for positioning control of machine tools.


**■ Dimensions/Operating Characteristics**

For all models WLj indicates a standard model and WL01j indicates a microload model.

**Note:** Unless otherwise indicated, a tolerance of ±0.4 mm applies to all dimensions.

**Roller Lever**

WLGA2  
WL01GA2

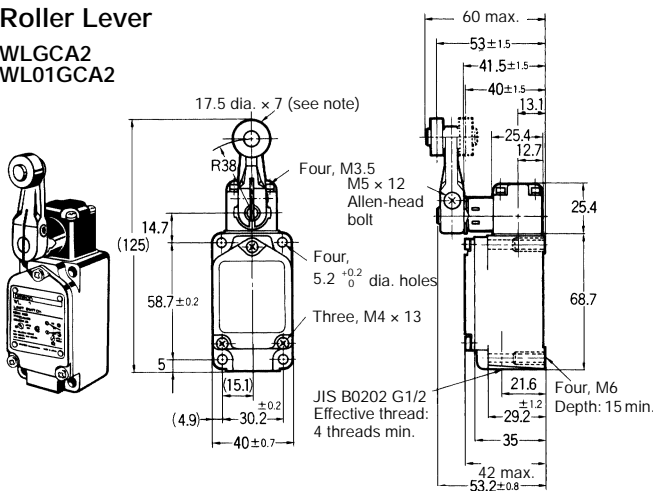

**Note:** Stainless sintered roller

| Operating characteristics      | WLGA2<br>WL01GA2 |
|--------------------------------|------------------|
| Operating force: OF max.       | 13.34 N          |
| Release force: RF min.         | 1.47 N           |
| Pretravel: PT                  | 5° +2/0          |
| Overtravel: OT min.            | 40°              |
| Movement differential: MD max. | 3°               |

# Connector Models


The connector models allow easy maintenance.

## ■ Dimensions/Operating Characteristics

**Note:** Unless otherwise indicated, a tolerance of ±0.4 mm applies to all dimensions.

### High-sensitivity


WLG2-j LDK13j  
WL01G2-j LDK13j

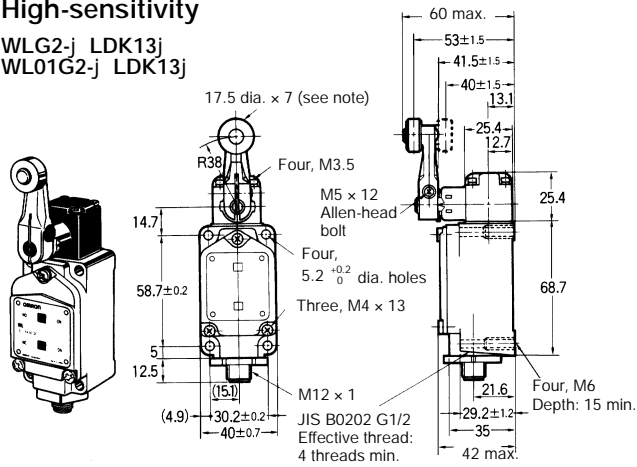

**Note:** Stainless steel roller

### High-sensitivity

WLG2-j LDK43j  
WL01G2-j LDK43j

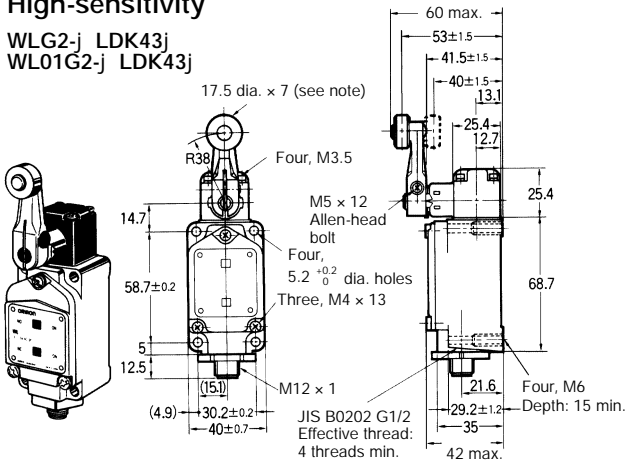

**Note:** 1. Stainless steel roller  
2. The indicator is wired on the NO side.

### Connector Pin Arrangement

| Built in switch terminal No. | Pin NO. |
|------------------------------|---------|
| 3 (NO)                       | 3       |
| 4 (NO)                       | 4       |

| Operating characteristics      | WLG2-j LDK13j<br>WL01G2-j LDK13j  |
|--------------------------------|-----------------------------------|
| Operating force: OF max.       | 9.81 N                            |
| Release force: RF min.         | 0.98 N                            |
| Pretravel: PT                  | 10° <sup>+2</sup> / <sub>-1</sub> |
| Overtravel: OT min.            | 65°                               |
| Movement differential: MD max. | 7°                                |
| Total travel                   | 80°±5°                            |

### Connector Pin Arrangement

| Built in switch terminal No. | Pin NO. |
|------------------------------|---------|
| 1 (NC)                       | 1       |
| 1 (NC)                       | 2       |
| 3 (NO)                       | 3       |
| 4 (NO)                       | 4       |


| Operating characteristics      | WLG2-j LDK13j<br>WL01G2-j LDK13j  |
|--------------------------------|-----------------------------------|
| Operating force: OF max.       | 9.81 N                            |
| Release force: RF min.         | 0.98 N                            |
| Pretravel: PT                  | 10° <sup>+2</sup> / <sub>-1</sub> |
| Overtravel: OT min.            | 65°                               |
| Movement differential: MD max. | 7°                                |
| Total travel                   | 80°±5°                            |

# Actuators


## ■ Dimensions (Levers Only)

Lever: Only rotating lever models are illustrated.


**WL-1A100**  
Standard Lever




**WL-1A115**  
Resin Roller




**WL-1A400**  
Bearing Roller




**WL-1A118**  
Nylon Roller:  
Roller Width: 30 mm




**WL-1A105**  
Double Nut




**WL-1A103S**  
Spatter Prevention




**WL-1A200**  
Lever Length: 50  
Roller Width: 15




**WL-1A300**  
Lever Length: 63

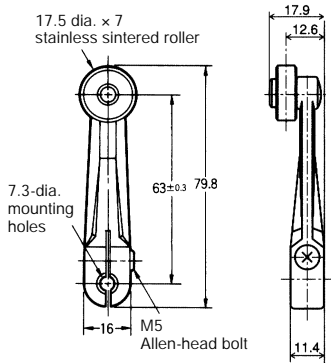


**WL-2A100**

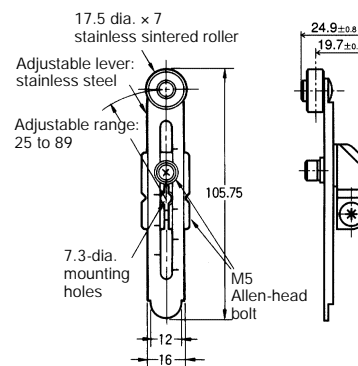


**WL-2A111**  
Resin Roller

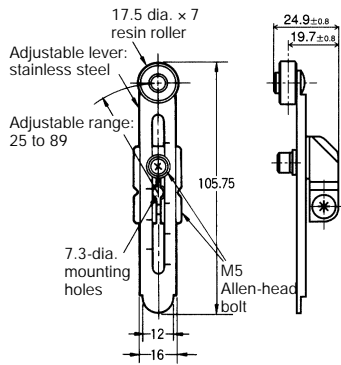


**WL-2A107**  
Double Nut

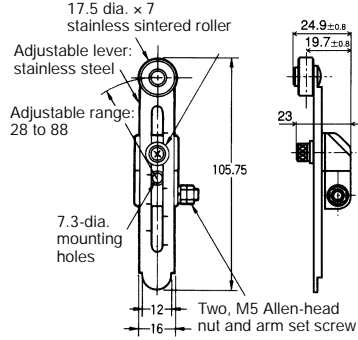


**WL-2A108**  
Resin Roller

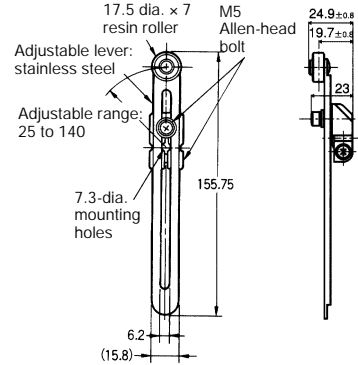

**WL-2A122**

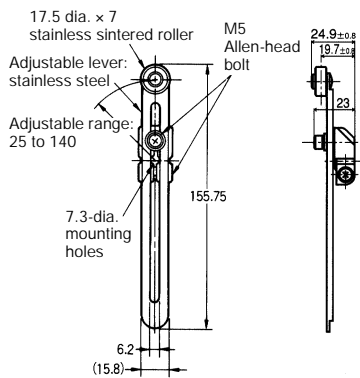


**WL-2A106**

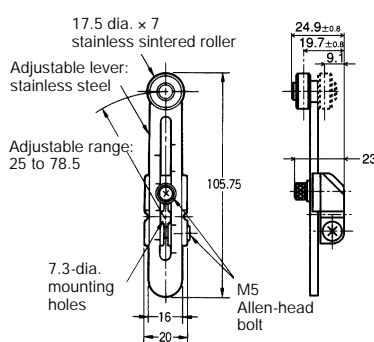


**Note:** Can be installed on the rear side.

**Note:** Unless otherwise indicated, a tolerance of ±0.4 mm applies to all dimensions.


**WL-2A104**

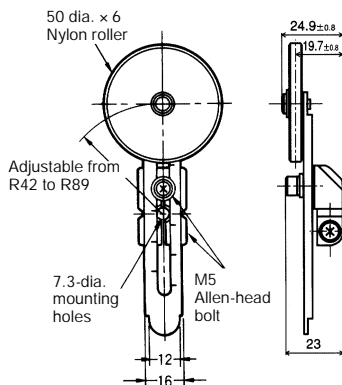


**WL-2A110**

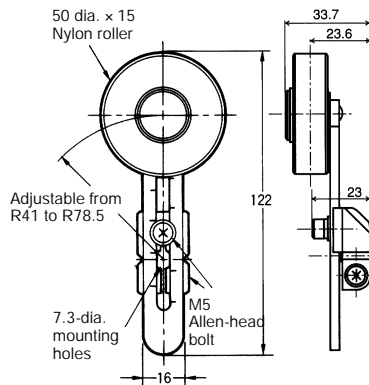


**WL-2A105**

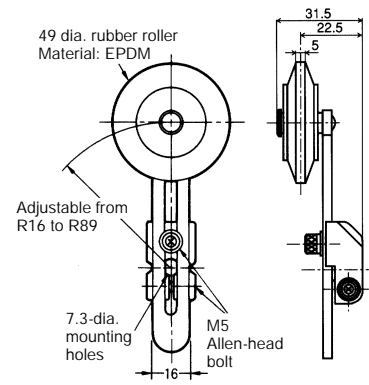


WL-1A106

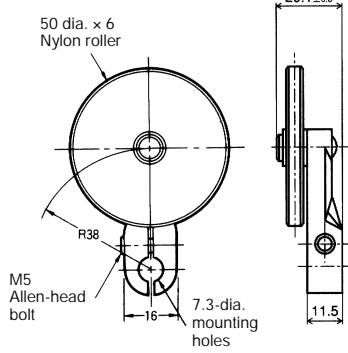


WL-1A110




WL-4A100




WL-4A201




WL-3A100

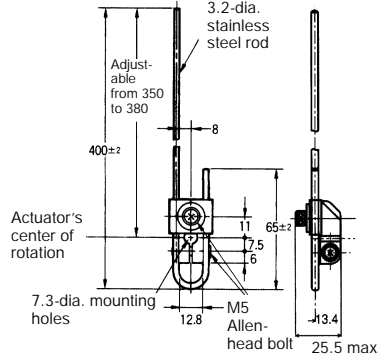


WL-3A106 Double Nut

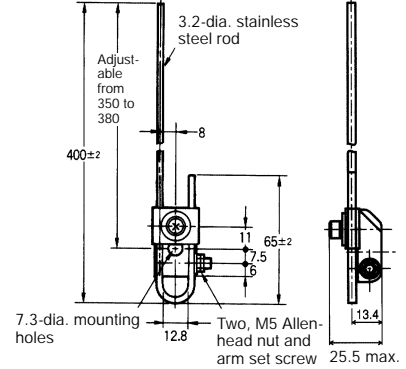


WL-3A108

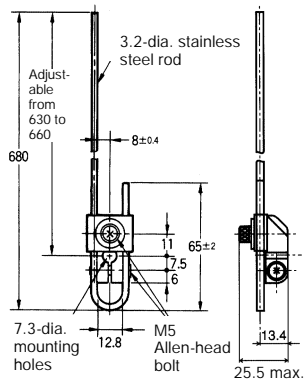


WL-3A200




WL-3A203

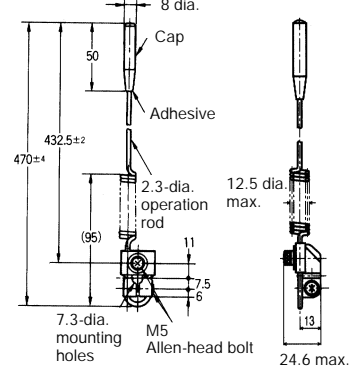

WL-4A112




WL-2A129

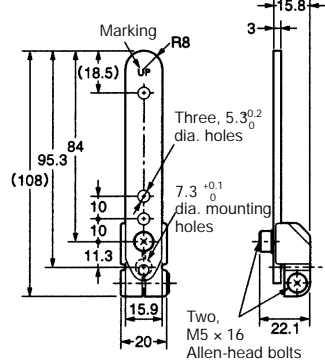

**Note:** When using the adjustable roller (rod) lever, make sure that the lever is facing downwards. Use caution, as telegraphing (the Switch turns ON and OFF repeatedly due to inertia) may occur.




**WL-5A101**

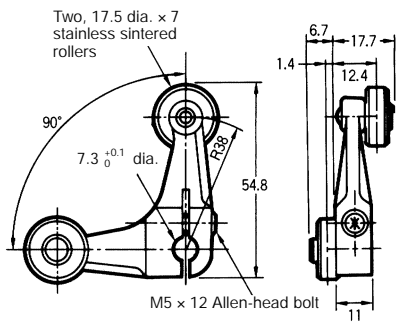


WL-5A100 has a plastic roller

**WL-5A103**

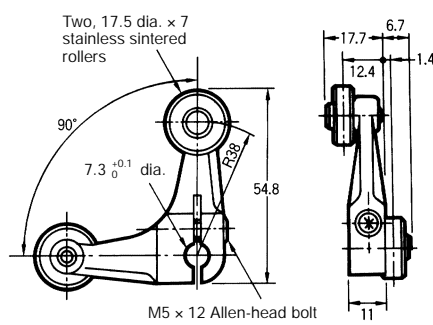





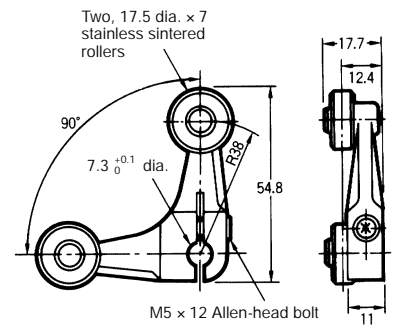


WL-5A102 has a plastic roller

**WL-5A105**



WL-5A104 has a plastic roller

■ **Head Models**

| Actuators   | Set model | Head model             | Head model without lever |
|---|-----------|------------------------|--------------------------|
| Roller lever             | WLCA2     | WL-1H1100              | WLRCA2                   |
|   | WLGCA2    | WL-1H1100-1 (see note) | WLRGCA2                  |
|   | WLG2      | WL-2H1100              | WLRG2                    |
|   | WLH2      | WL-2H1100-1 (see note) | WLRH2                    |
|   | WLCA2-2N  | WL-6H1100              | WLRCA2-2N                |
| Adjustable roller lever  | WLCA12    | WL-1H2100              | WLRCA2                   |
|   | WLG12     | WL-2H2100              | WLRG2                    |
|   | WLH12     | WL-2H2100-1 (see note) | WLRH2                    |
|   | WLCA12-2N | WL-6H2100              | WLRCA2-2N                |
| Adjustable rod lever    | WLCL      | WL-4H4100              | WLRCL                    |
|   | WGL       | WL-2H4100              | WLRG2                    |
|   | WLCL-2N   | WL-6H4100              | WLRCA2-2N                |
| Top plunger            | WLD       | WL-7H100               | ---                      |
|   | WLD2      | WL-7H200               |                          |
|   | WLD3      | WL-7H300               |                          |
|   | WLD28     | WL-7H400               |                          |
| Horizontal plunger     | WLS       | WL-8H100               | ---                      |
|   | WLS2      | WL-8H200               |                          |
|   | WLS3      | WL-8H300               |                          |
| Fork lever lock        | WLCA32-41 | WL-5H5100              | WLRCA32                  |
| Coil spring            | WLNJ      | WL-9H100               | ---                      |
|   | WLNJ-30   | WL-9H200               |                          |
|   | WLNJ-2    | WL-9H300               |                          |
|   | WLNJ-S2   | WL-9H400               |                          |


**Note:** For the model number of Heads without lever, simply remove the numbers after WL-j H. For example, WL-1H1100 becomes WL-1H. WLH2 and WLH12 however, become WL-2H-1, and WLGCA2 becomes WL-1H-1. Other Head models are available, but must be ordered separately.

# Environment-resistant Models

## Spatter-prevention Models

These models are most effective in an arc welding line or places where cutting powder is spattered.




### ■ Nomenclature

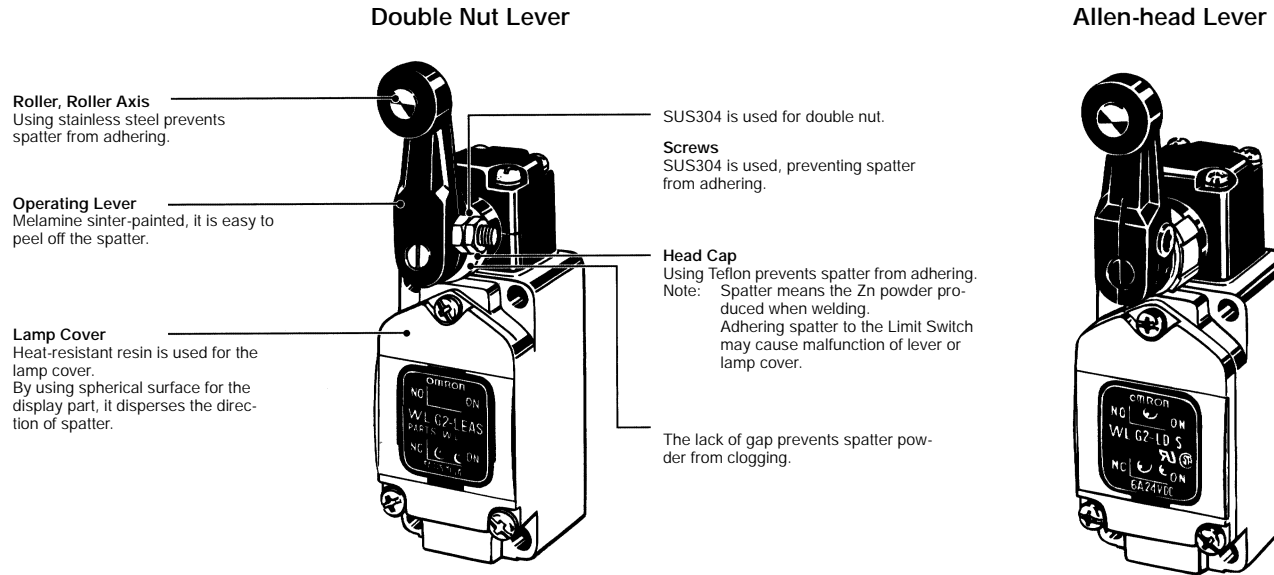

### ■ List of Models

#### Rotating Lever Models


##### Standard Models

| Type           | Total travel (TT)   | Actuators   | Neon lamp        |                | LED              |           |
|----------------|---|---|------------------|----------------|------------------|-----------|
|                |   |   | 125 VAC          | 250 VAC        | 10 to 115 VAC/DC |           |
|                |   |   | Approx. 0.6 mA   | Approx. 1.9 mA | Approx. 1.0 mA   |           |
| Standard       | One-side operation is possible<br> | Double nut lever  | WLCA2-LEAS       |                | WLCA2-LDAS       |           |
|                |   | Allen-head lever  | WLCA2-LES        |                | WLCA2-LDS        |           |
| Overtravel     | General   | Double nut lever  | WLH2-LEAS        |                | WLH2-LDAS        |           |
|                |   | Allen-head lever  | WLH2-LES         |                | WLH2-LDS         |           |
|                | High-sensitivity  | One-side operation is impossible<br> | Double nut lever | WLG2-LEAS      |                  | WLG2-LDAS |
|                |   |   | Allen-head lever | WLG2-LES       |                  | WLG2-LDS  |
| High-precision | One-side operation is possible<br> | Double nut lever  | WLGCA2-LEAS      |                | WLGCA2-LDAS      |           |
|                |   | Allen-head lever  | WLGCA2-LES       |                | WLGCA2-LDS       |           |

**Note:** Consult your OMRON representative for the microload WL01j models.

**Plunger Models**

Standard Models

| Actuator  | Neon lamp      |                | LED              |
|---|----------------|----------------|------------------|
|   | 125 VAC        | 250 VAC        | 10 to 115 VAC/DC |
|   | Approx. 0.6 mA | Approx. 1.9 mA | Approx. 1.0 mA   |
| Seal top-roller plunger  | WLD28-LES      |                | WLD28-LDS        |

■ Ratings


| Model      | Rated current | Non-inductive load |    |           |       | Inductive load |    |            |       |
|------------|---------------|--------------------|----|-----------|-------|----------------|----|------------|-------|
|            |               | Resistive load     |    | Lamp load |       | Inductive load |    | Motor load |       |
|            |               | NC                 | NO | NC        | NO    | NC             | NO | NC         | NO    |
| WLCA2-LEj  | 125 VAC       | 10 A               |    | 3 A       | 1.5 A | 10 A           |    | 5 A        | 2.5 A |
| WLH2-LEj   | 250 VAC       | 10 A               |    | 2 A       | 1 A   | 10 A           |    | 3 A        | 1.5 A |
| WLGCA2-LEj | 125 VDC       | 0.8 A              |    | 0.2 A     | 0.2 A | 0.8 A          |    | 0.2 A      | 0.2 A |
| WLG2-LEj   | 250 VDC       | 0.4 A              |    | 0.1 A     | 0.1 A | 0.4 A          |    | 0.1 A      | 0.1 A |
| WLD28-LES  | 250 VDC       | 0.4 A              |    | 0.1 A     | 0.1 A | 0.4 A          |    | 0.1 A      | 0.1 A |
| WLCA2-LDj  | 115 VAC       | 10 A               |    | 3 A       | 1.5 A | 10 A           |    | 5 A        | 2.5 A |
| WLH2-LDj   | 12 VDC        | 10 A               |    | 6 A       | 3 A   | 10 A           |    | 6 A        |       |
| WLGCA2-LDj | 24 VDC        | 6 A                |    | 4 A       | 3 A   | 6 A            |    | 4 A        |       |
| WLG2-LDj   | 48 VDC        | 3 A                |    | 2 A       | 1.5 A | 3 A            |    | 2 A        |       |

- Note:**
1. The above figures are for standard currents.
  2. Inductive loads have a power factor of 0.4 min. (AC) and a time constant of 7 ms max. (DC).
  3. Lamp load has an inrush current of 10 times the steady-state current.
  4. Motor load has an inrush current of 6 times the steady-state current.

|                       |                               |           |
|-----------------------|-------------------------------|-----------|
| Inrush current        | NC                            | 30 A max. |
|                       | NO                            | 20 A max. |
| Operating temperature | -10°C to 80°C (with no icing) |           |
| Operating humidity    | 95% max.                      |           |

■ Contact Form

Standard Model



■ Approved Standard Ratings

UL/CSA

LE (Neon Lamp) A300


| Rated voltage | Carry current | Current |       | Volt-amperes |        |
|---------------|---------------|---------|-------|--------------|--------|
|               |               | Make    | Break | Make         | Break  |
| 120 VAC       | 10 A          | 60 A    | 6 A   | 7,200 VA     | 720 VA |
| 240 VAC       |               | 30 A    | 3 A   |              |        |

LD (LED)

| Rated voltage | Carry current |
|---------------|---------------|
| 115 VAC       | 10 A          |
| 115 VDC       | 0.8 A         |

■ Dimensions/Operating Characteristics


Roller Lever

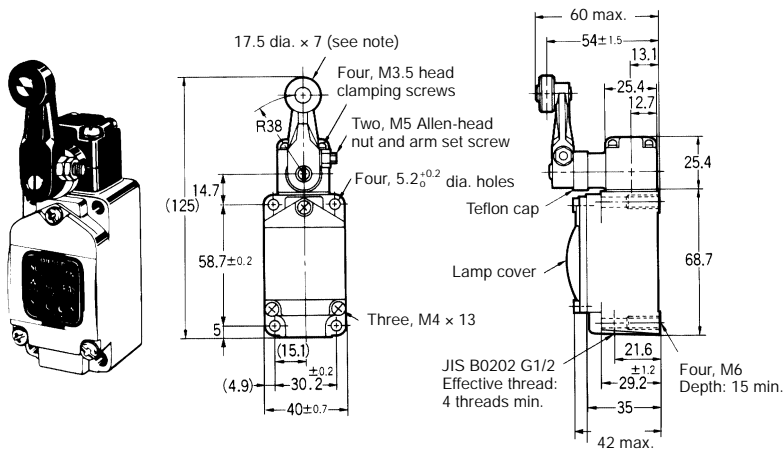

Note: Stainless steel roller

| Operating characteristics      | Standard | Overtravel models |                                   | High-precision                   |
|--------------------------------|----------|-------------------|-----------------------------------|----------------------------------|
|                                |          | General           | High-sensitivity                  |                                  |
| Operating force: OF max.       | 13.34 N  | 9.81 N            | 9.81 N                            | 13.34 N                          |
| Release force: RF min.         | 2.23 N   | 0.98 N            | 0.98 N                            | 1.47 N                           |
| Pretravel: PT                  | 15°±5°   | 15°±5°            | 10° <sup>+2°</sup> <sub>-1°</sub> | 5° <sup>+2°</sup> <sub>-0°</sub> |
| Overtravel: OT min.            | 30°      | 55°               | 65°                               | 40°                              |
| Movement differential: MD max. | 12°      | 12°               | 7°                                | 3°                               |

Seal Top-roller Plunger

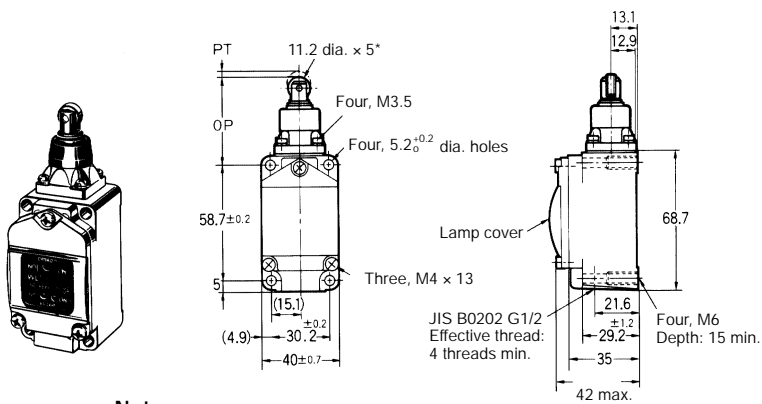

Note: Stainless steel roller






| Operating characteristics       | WLD28-Lj S |
|---------------------------------|------------|
| Operating force: OF max.        | 16.67 N    |
| Release force: RF min.          | 4.41 N     |
| Pretravel: PT max.              | 1.7 mm     |
| Overtravel: OT min.             | 5.6 mm     |
| Movement differential: MD max.  | 1 mm       |
| Operating position: OP          | 44±0.8 mm  |
| Total travel position: TTP max. | 39.5 mm    |

Note: Unless otherwise indicated, a tolerance of ±0.4 mm applies to all dimensions.

### ■ Spatter-prevention Parts

All parts of the Switch have spatter-prevention properties, so be sure to use the following products for maintenance of Spatter-prevention Limit Switches.

#### Levers/Lamp-equipped Covers

| Type  | Without lever<br> | Complete Head<br>(lever with Head)<br> | Double nut lever<br> | Allen-head lever<br> | Lamp-equipped cover<br> |
|-------|--|---|---|---|--|
| Model | Add an "R" to the product number to order.<br>E.g.: WLj CA2-LES                                    | WL-1H1100S<br>(in case of WLCA2-j ,<br>WLGCA2-j )   | WL-1A105S<br>(forward and backward<br>lever)  | WL-1A103S<br>(forward and backward<br>lever)  | WL-LES<br>(Neon Lamp)  |
|       |  | WL-2H1100S<br>(in case of WLH2-j ,<br>WLG2-j )  |   |   | WL-LDS<br>(LED)  |

#### Switches Without Lever


WLRCA2-LES, WLRCA2-LDS  
 WLRH2-LES, WLRH2-LDS, WLRG2-LES  
 WLRG2-LDS  
 WLRGCA2-LES, WLRGCA2-LDS

## Airtight, Hermetic Seal, Low-temperature, Heat-resistive, Corrosion-proof, and Weather-resistant Models

Using the general-purpose model, six types of environment-resistant models can be created to meet a variety of difficult operating conditions. Select the model most appropriate to your operating environment.


### ■ Nomenclature Example

#### Airtight Built-in Switch

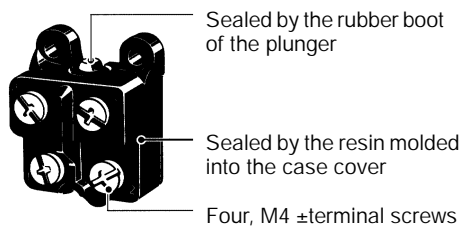

#### Hermetic Seal Model

The lead wires are sealed to the Limit Switch with resin, providing a hermetically sealed construction.

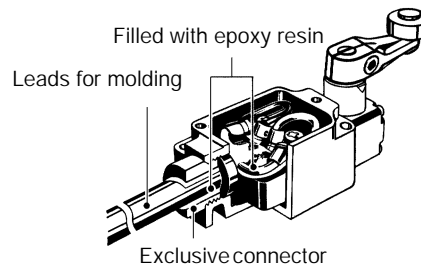

## ■ Models

| Type      |  | Usage   | Environment-resistant construction  |   |   | Appropriate models  |   |
|-----------|--|---|---|---|---|---|---|
| WLj -55   | Airtight seal  | For use in locations subject to splashes of water and anti-coolant  | Uses the W-10FB3-55 Airtight Built-in Switch. (See note 2.)   |   |   | All models except the low-temperature and heat-resistive models. (See note 3.)  |   |
| WLj -139  | Hermetic seal (molded terminals and anti-coolant models) |   | General-purpose built-in switch   | Connection lead wires: Standard 5-m VCT (vinyl cabtire cable) cable attached. Finished diameter: 11.5 mm, 4-core.                               | The case cover and conduit opening are molded from epoxy resin. The cover cannot be removed.  | All models except the low-temperature and heat-resistive models. (See note 4.)  |   |
| WLj -140  |  |   | Hermetically-sealed built-in switch   | Connection lead wires: Standard 5-m VCT cable, with high flexibility and good anti-oil properties attached. Finished diameter: 11.5 mm, 4-core. | The case cover, cover box and conduit opening are molded from epoxy resin. The cover cannot be removed (140, 141, RP40, and RP60).<br>The Head opening is protected from cutting powder. (WLj -141) |   |   |
| WLj -141  |  |   |   |   | The connector can be removed, so it is possible to use flexible wires in the cable.   |   |   |
| WLj -RP40 |  |   |   |   |   |   | Rubber parts are made from fluorine rubber. |
| WLj -RP60 |  |   |   |   |   |   |   |
| WLj -TC   | Low-temperature  | Can be used at a temperature of -40_C (The operating temperature range is -40_C to 40_C), but cannot withstand icing. | Uses the general-purpose built-in switch.<br>Silicone rubber is used for rubber parts such as the O-ring, gasket, etc.  |   |   | All models except airtight, hermetic, heat-resistive, corrosion-proof, or lamp-equipped models.   |   |
| WLj -TH   | Heat-resistive   | Can be used in temperatures of 120_C (The operating temperature range is 5_C to 120_C).                               | Uses a special built-in switch made from heat-resistant resin.<br>Silicone rubber is used for rubber parts such as the O-ring, gasket etc.  |   |   | All models except airtight, hermetic, low-temperature, corrosion-proof, lamp-equipped, nylon roller (WLCA2-26N), seal roller models, and resin rod (WLNJ-2) models.                         |   |
| WLj -RP   | Corrosion-proof  | For use in locations subject to corrosive gases and chemicals.  | Diecast parts such as the switch box are made of corrosion-proof aluminum.<br>Rubber sealing parts are made of fluorine rubber which aids in resisting oil, chemicals and adverse weather conditions.<br>Exposed nuts and screws (except the actuator section) are made of stainless steel.<br>Moving and rotary parts such as rollers are made of sintered stainless steel or stainless steel. |   |   | All models except overtravel model (-2N), fork lever lock models (WLCA32-41 to -43), low-temperature, heat-resistive, and lamp-equipped models.   |   |
| WLj -P1   | Outdoor specifications                                   | For use in parking lots and other such outdoor locations.   | Rubber parts are made from silicone rubber, which has a high-tolerance to deterioration over time, and changes in temperature.<br>Rollers are made of stainless steel to improve corrosion resistance.<br>Exposed nuts and screws are made of stainless steel.  |   |   | Only the general-purpose overtravel models (WLH2/12), the overtravel high-sensitivity models (WLG2/12) and some standard models (e.g., WLCA2) can be used. Excluding heat-resistive models. |   |

- Note:**
1. Consult your OMRON representative for the microload WL01j models.
  2. Use the SC Connector for the conduit opening.
  3. The actuator can be created using the standard model.
  4. The actuator can be created using the standard model. For WL-j 141, only WLG2, WLCA2, and WLGCA2 can be used.


■ Dimensions/Operating Characteristics

The dimensions and operating characteristics are the same as general-purpose, environment-resistant models.

■ Ratings/Characteristics

See pages 7 to 10.

■ Contact Form



■ Approved Standard Ratings

Contact your OMRON representative for details of approved models.

■ Ordering Information

Use the following as a guide when ordering environment-resistant models.

E.g.: For a hermetic model of WLCA2

WLCA2 - 55  
Standard Specifications No.


An additional catalog is available for outdoor specifications models.

Lamp-equipped Models

The operating status of the Switch can be checked using a neon lamp or LED indicator.

Circuit checks and troubleshooting errors are easy done.

The lamp-equipped models are ideal in locations using a conveyor belt where items need to be checked, or locations that are difficult to inspect for faults.

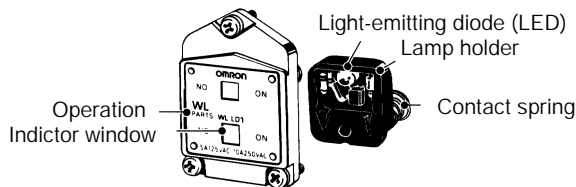


The built-in switch's terminal screws are used to connect the lamp terminal (indicator cover). Since the connection spring (coil spring) is used for this connection, it will not be necessary to connect to the lamp terminal. When a ground terminal is provided however, lead wire method must be used.


WL-LD has a built-in rectifier stack, so it will not be necessary to change the polarity.

The indicator cover is molded from diecast aluminum and has outstanding sealing properties. Furthermore, regardless of whether the power is connected or not, the operating status is shown (operating or not operating), and indicators can be switched from light-ON when operating and light-ON when not operating, by simply rotating the lamp holder by 180°. (Molded terminals do not have this switching capacity.)

Light-ON when Operating



Light-ON when Not Operating




■ Models/Ratings

| Operating characteristics | Rated voltage     | Leakage current | Lamp-equipped Switch  | Lamp-equipped cover only |
|---------------------------|-------------------|-----------------|-----------------------|--------------------------|
| Neon lamp                 | 125 VAC           | Approx. 0.6 mA  | WLj -LE (see note 1.) | WL-LE                    |
|                           | 250 VAC           | Approx. 1.9 mA  |                       |                          |
| LED                       | 10 to 115 VAC/VDC | Approx. 1 mA    | WLj -LD (see note 1.) | WL-LD                    |

- Note:**
1. In the model number, j indicates the actuator number. For example, CA2, D, NJ, etc.
  2. The default setting is "light-ON when not operating." Turn the lamp holder by 180° to change the setting to "light-ON when operating."

■ Operation

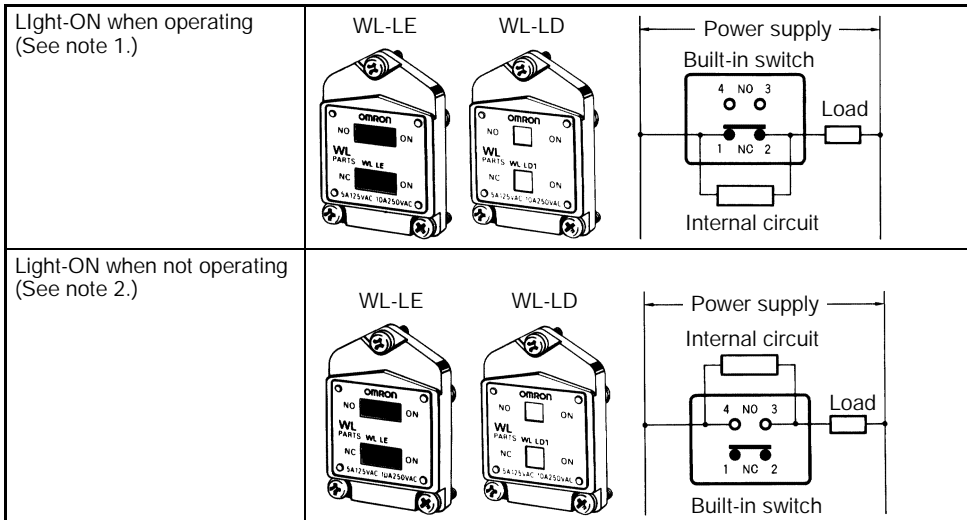

**Note:** 1. Light-ON when operating means that the lamp lights when the Limit Switch contacts (NC) release, or when the actuator rotates or is pushed down.  
 2. Light-ON when not operating means the lamp remains lit when the actuator is free, or when the Limit Switch contacts (NO) close when the actuator rotates or is pushed down.

■ Ordering Information

When ordering general-purpose indicator-equipped models insert the specifications number at the end of the basic model number.

E.g.: When a neon lamp is installed in a General-purpose/Standard Roller Lever Switch (WLCA2).

|              |                     |
|--------------|---------------------|
| <u>WLCA2</u> | <u>LE</u>           |
| Standard     | Lamp specifications |

When ordering indicator-equipped molded terminal models, insert the specifications number at the end of the standard model number.

E.g.: When a Neon Lamp (WL-LE) is installed in a general-purpose molded terminal model (WLCA2-139).


|                  |                     |             |  |
|------------------|---------------------|-------------|--|
| <u>WLCA2-139</u> | <u>LE</u>           | <u>2</u>    |  |
| Standard         | Lamp specifications | Lamp wiring | 2: NC connection: Light-ON when operating<br>3: NO connection: Light-ON when not operating |

**Note:** The indicator cover cannot be replaced on the molded terminals. In all cases the indicator does not light when the load is ON.

■ Dimensions/Operating Characteristics

Roller Lever

WLCA2-LE

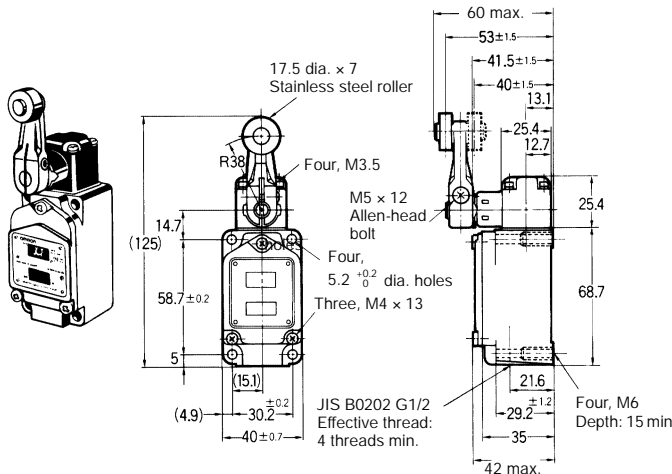


**Note:** Unless otherwise indicated, a tolerance of ±0.4 mm applies to all dimensions.

|         |         |
|---------|---------|
| OF max. | 13.34 N |
| RF min. | 2.23 N  |
| PT      | 15°±5°  |
| OT min. | 30°     |
| MD max. | 12°     |

**Note:** Stainless steel roller



■ Internal Circuits

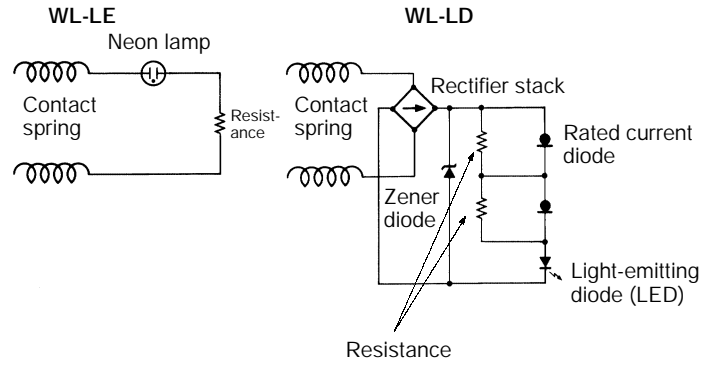

# Sensor I/O Connector Models

A reduction in the amount of wiring and parts makes maintenance easy and reduced wiring mistakes, in addition it's already compact size for fitting into areas of limited space.

## Ordering Information

| Item                                    |                                 | Standard | Overtravel | High sensitivity |
|---|---------------------------------|----------|------------|------------------|
| Actuators                               | Rotating lever                  | Yes      | Yes        | Yes              |
|   | Plunger                         | Yes      | ---        | ---              |
| Load                                    | Standard load (SPST-NO/SPST-NC) | Yes      |            |                  |
|   | Microload (SPST-NO/SPST-NC)     | Yes      |            |                  |
| High-precision models WL-j 55           |                                 | Yes      |            |                  |
| Spatter-prevention models (See note 3.) |                                 | Yes      |            |                  |
| Lamp                                    |                                 | Yes      |            |                  |

- Note:**
- Standard Models: For standard models only one-side operation at an angle of 45\_ is possible.  
Overtravel Models: Only one-side operation at an angle of 80\_ is possible. One-side operation only is not possible.  
High-precision Models: Only one-side operation at an angle of 45\_ is possible, and pretravel (PT) is 5\_, as opposed to 15\_ for standard models.
  - For information other than that listed at the above, contact your OMRON representative.
  - The spatter-prevention models are only available as pre-wired connectors.

## Models

### Direct-wired Connectors

| Type          | 2-core (NO)  | 4-core       |
|---------------|--------------|--------------|
| Lamp-equipped | WLj -LDK13   | WLj -LDK43   |
| Double-seal   | WLj -55LDK13 | WLj -55LDK43 |

- Note:**
- In the model number, j indicates the actuator number. For example, Overtravel Model WLG2-LDK13.
  - The lamp is set to "light-ON when not operating" (NO connection).

### Pre-wired Connectors

| Type          | 2-core (NO)   | 2-core (NC)    | 4-core         | 3-core (NO)       |
|---------------|---------------|----------------|----------------|-------------------|
| Lamp-equipped | WLj -LD-M1J   | WLj -LD-M1JB   | WLj -LD-DGJ03  | WLj -LD-DK1EJ03   |
| Double-seal   | WLj -55LD-M1J | WLj -55LD-M1JB | WLj -55LD-DGJ3 | WLj -55LD-DK1EJ03 |

- Note:**
- In the model number, j indicates the actuator number. For example, Overtravel Model WLG2-LD-M1J.
  - The lamp is set to "light-ON when not operating" (NO connection).

## Model Number Legend

WL -       -    LD     
           1   2   3      4

### 1. Electrical Rating

Blank: Standard  
01: Microload

### 2. Actuator Type

CA2: Roller lever: Standard  
GCA2: Roller lever: High-precision  
H2: Roller lever: Overtravel, general-purpose  
G2: Roller lever: Overtravel, high-sensitivity  
D2: Plunger: Top-roller plunger  
D28: Plunger: Top-roller plunger, sealed

### 3. Built-in Switch Type

Blank: Standard  
55: Hermetically sealed


### 4. Wiring Specifications

K13A: Direct-wired Connector  
(2-core: AC, NO wiring, connector pins No. 3, 4)  
K13: Direct-wired Connector  
(2-core: DC, NO wiring, connector pins No. 3, 4)  
K43A: Direct-wired Connector (4-core: AC)  
K43: Direct-wired Connector (4-core: DC)  
-M1J: Pre-wired Connector\*  
(2-core: DC, NO wiring, connector pins No. 3, 4)  
-M1GJ: Pre-wired Connector\*  
(2-core: DC, NO wiring, connector pins No. 1, 4)  
-M1JB: Pre-wired Connector\*  
(2-core: DC, NC wiring, connector pins No. 3, 2)  
-AGJ03: Pre-wired Connector\* (4-core, AC)  
-DGJ03: Pre-wired Connector\* (4-core, DC)  
-DK1EJ03: Pre-wired Connector\*  
(3-core: DC, NO wiring, connector pins No. 2, 3, 4)

**Note:** \*With 0.3-m cable attached.

Direct-wired Connector

Pre-wired Connector

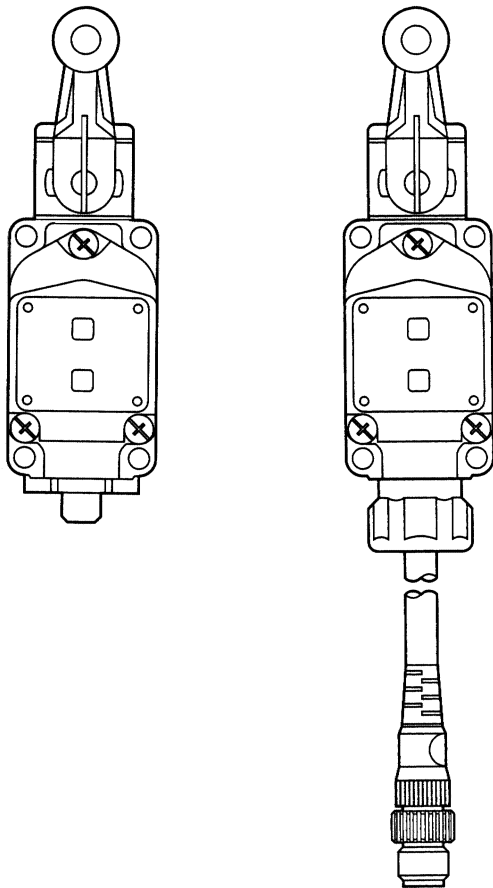

**Spatter-prevention Models**

WL -   -   S   
 1 2 3 4 5

**1. Electrical Rating**

Blank: Standard  
 01: Microload

**2. Actuator Type**

CA2: Roller lever: Standard  
 GCA2: Roller lever: High-precision  
 H2: Roller lever: Overtravel, general-purpose  
 G2: Roller lever: Overtravel, high-sensitivity  
 D28: Plunger: Top-roller plunger, sealed

**3. Built-in Switch Type**

Blank: Standard  
 55: Hermetically sealed

**4. Indicator Lamp**

Blank: None  
 LD: LED indicator lamp (AC/DC common)  
 LE: Neon Lamp

**5. Wiring Specifications**

-M1J-1: Pre-wired Connector\*  
 (2-core: DC, NO wiring, connector pins No. 3, 4)  
 -M1GJ-1: Pre-wired Connector\*  
 (2-core: DC, NO wiring, connector pins No. 1, 4)  
 -DGJS03: Pre-wired Connector\* (4 core, DC)

**Note:** \*With 0.3-m cable attached.

**■ Wiring Specifications**

| Direct-wired Connector |           |                       |           | Pre-wired Connector |           |                 |           |                 |           |                          |           |                 |           |
|------------------------|-----------|-----------------------|-----------|---------------------|-----------|-----------------|-----------|-----------------|-----------|--------------------------|-----------|-----------------|-----------|
| 2-core                 |           | 4-core                |           | 2-core              |           |                 |           |                 |           | 4-core                   |           | 3-core          |           |
| K13 (DC)<br>K13A (AC)  |           | K43 (DC)<br>K43A (AC) |           | M1J (DC)            |           | M1GJ (DC)       |           | M1JB (DC)       |           | DGJ03 (DC)<br>AGJ03 (AC) |           | DK1EJ03 (DC)    |           |
| Built-in switch        | Connector | Built-in switch       | Connector | Built-in switch     | Connector | Built-in switch | Connector | Built-in switch | Connector | Built-in switch          | Connector | Built-in switch | Connector |
| 1 (NC)                 | ---       | 1 (NC)                | 1         | 1 (NC)              | ---       | 1 (NC)          | ---       | 1 (NC)          | 3         | 1 (NC)                   | 1         | 1 (NC)          | ---       |
| 2 (NC)                 | ---       | 2 (NC)                | 2         | 2 (NC)              | ---       | 2 (NC)          | ---       | 2 (NC)          | 2         | 2 (NC)                   | 2         | 2 (NC)          | 2         |
| 3 (NO)                 | 3         | 3 (NO)                | 3         | 3 (NO)              | 3         | 3 (NO)          | 1         | 3 (NO)          | ---       | 3 (NO)                   | 3         | 3 (NO)          | 3         |
| 4 (NO)                 | 4         | 4 (NO)                | 4         | 4 (NO)              | 4         | 4 (NO)          | 4         | 4 (NO)          | ---       | 4 (NO)                   | 4         | 4 (NO)          | 4         |

■ Ratings

General-purpose Ratings (Lamp-equipped)

| Type   | Rated voltage | Non-inductive load |       |           |       | Inductive load |       |            |       |
|--------|---------------|--------------------|-------|-----------|-------|----------------|-------|------------|-------|
|        |               | Resistive load     |       | Lamp load |       | Inductive load |       | Motor load |       |
|        |               | NC                 | NO    | NC        | NO    | NC             | NO    | NC         | NO    |
| For DC | 12 VDC        | 1 A                | 1 A   | 1 A       | 1 A   | 1 A            | 1 A   | 1 A        | 1 A   |
|        | 24 VDC        | 1 A                | 1 A   | 1 A       | 1 A   | 1 A            | 1 A   | 1 A        | 1 A   |
|        | 48 VDC        | 1 A                | 1 A   | 1 A       | 1 A   | 1 A            | 1 A   | 1 A        | 1 A   |
|        | 115 VDC       | 0.8 A              | 0.8 A | 0.2 A     | 0.2 A | 0.8 A          | 0.8 A | 0.2 A      | 0.2 A |
| For AC | 115 VAC       | 1 A                | 1 A   | 1 A       | 1 A   | 1 A            | 1 A   | 1 A        | 1 A   |

- Note:
1. The above figures are for standard currents.
  2. Inductive loads have a power factor of 0.4 min. (AC) and a time constant of 7 ms max. (DC).
  3. Lamp load has an inrush current of 10 times the steady-state current.
  4. Motor load has an inrush current of 6 times the steady-state current.


■ Dimensions

Roller Lever Models

Standard Model (WLCA2), High-precision Model (WLGA2), Overtravel Model (WLH2), and Overtravel High-sensitivity Model (WLG2)


- Note:
1. For the WLG2 model, only the dimensions for the set position marker plate change.
  2. Unless otherwise indicated, a tolerance of ±0.4 mm applies to all dimensions.
  3. The above diagram is for a lamp-equipped model.

Direct-wired Connector Models

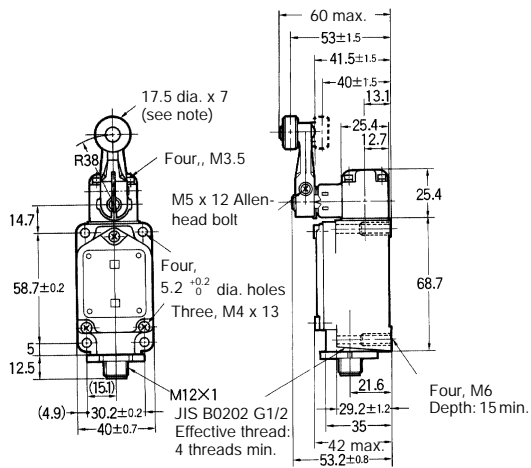

Note: Stainless sintered roller

Pre-wired Connector Models

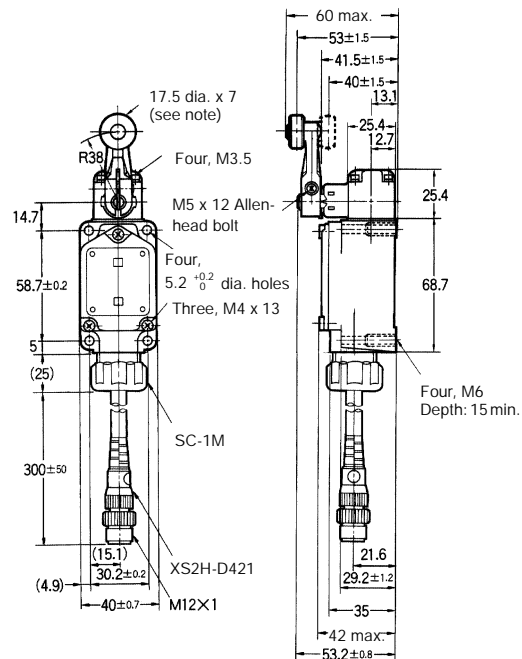


| Operating characteristics      | Roller lever/Standard model | Roller lever/High precision model | Roller lever/Overtravel model | Roller lever/Overtravel high sensitivity model |
|--------------------------------|-----------------------------|-----------------------------------|-------------------------------|--|
| Operating force: OF max.       | 13.34 N                     | 13.34 N                           | 9.81 N                        | 9.81 N   |
| Release force: RF min.         | 2.23 N                      | 1.47 N                            | 0.98 N                        | 0.98 N   |
| Pretravel: PT                  | 15±5°                       | 5° <sup>+2°</sup> / <sub>0°</sub> | 15±5°                         | 10° <sup>+2°</sup> / <sub>0°</sub>             |
| Overtravel: OT min.            | 30°                         | 40°                               | 55°                           | 65°  |
| Movement differential: MD max. | 12°                         | 3°                                | 12°                           | 7°   |

### Top-roller Plunger

WLD2


- Note:** 1. Unless otherwise indicated, a tolerance of  $\pm 0.4$  mm applies to all dimensions.  
 2. The above diagram is for a lamp-equipped model.

#### Direct-wired Connector Models

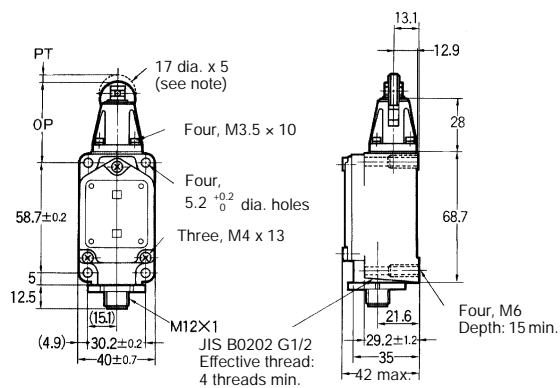

**Note:** Stainless sintered roller

#### Pre-wired Connector Models

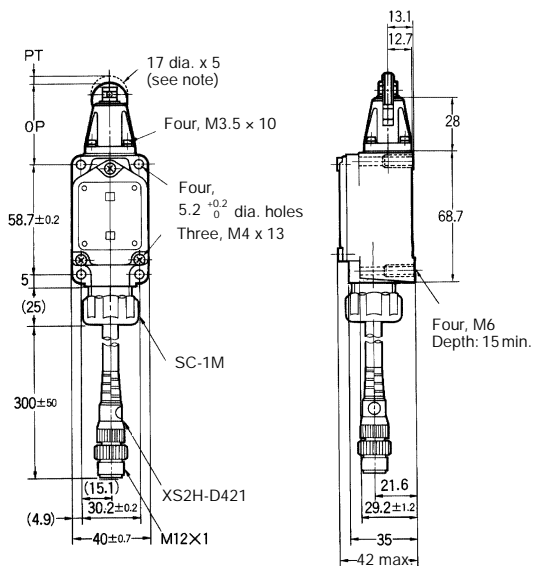


| Operating characteristics       | Top-roller plunger actuator |
|---------------------------------|-----------------------------|
| Operating force: OF max.        | 26.67 N                     |
| Release force: RF min.          | 8.92 N                      |
| Pretravel: PT max.              | 1.7 mm                      |
| Overtravel: OT min.             | 5.6 mm                      |
| Movement differential: MD max.  | 1 mm                        |
| Operating position: OP          | 44±0.8 mm                   |
| Total travel position: TTP max. | 39.5 mm                     |

### Sealed Top-roller Plunger


WLD28

- Note:** 1. Unless otherwise indicated, a tolerance of  $\pm 0.4$  mm applies to all dimensions.  
 2. The above diagram is for a lamp-equipped model.

#### Direct-wired Connector Models




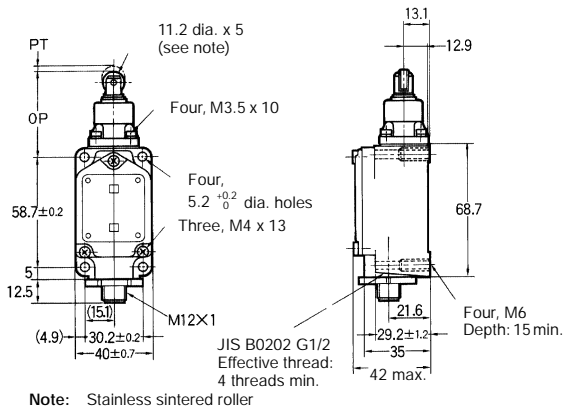




#### Pre-wired Connector Models

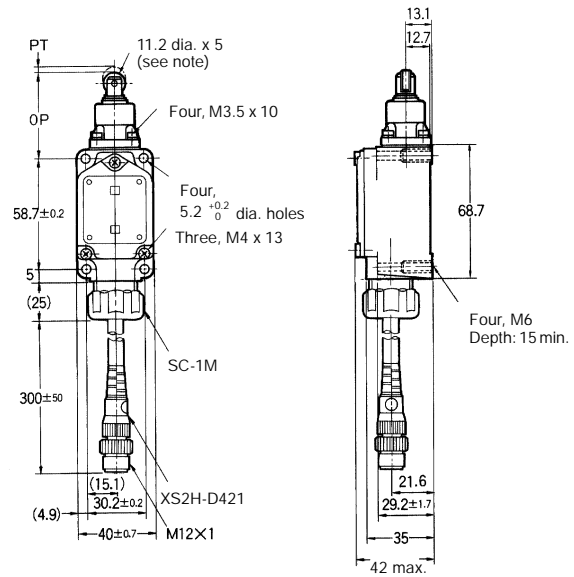

| Operating characteristics       | Sealed top-roller plunger actuator |
|---------------------------------|------------------------------------|
| Operating force: OF max.        | 16.67 N                            |
| Release force: RF min.          | 4.41 N                             |
| Pretravel: PT max.              | 1.7 mm                             |
| Overtravel: OT min.             | 5.6 mm                             |
| Movement differential: MD max.  | 1 mm                               |
| Operating position: OP          | $44 \pm 0.8$ mm                    |
| Total travel position: TTP max. | 39.5 mm                            |

■ Application Variations
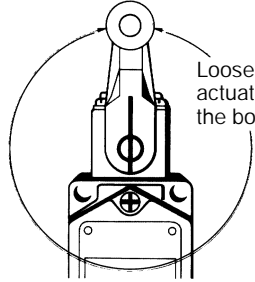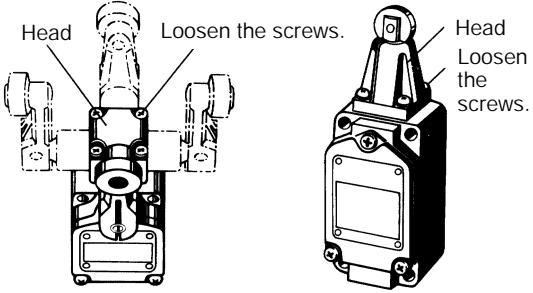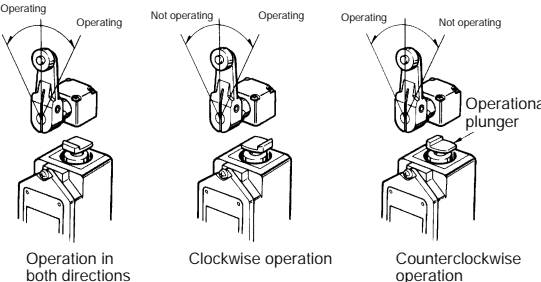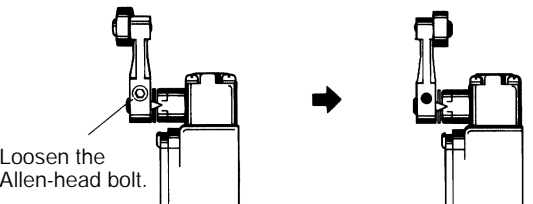
| Item   | Appropriate model/actuator  | Details  |
|--|---|--|
| <p><b>Changing the installation position of the actuator</b></p> <p>By loosening the Allen-head bolt on the actuator lever, the position of the actuator can be set anywhere within the 360°. With Lamp-equipped Switches, the actuator lever comes in contact with the top of the lamp cover, so use caution when rotating and setting the lever. When the lever only moves forwards and backwards, it will not contact the lamp cover.</p>   | <p>Roller Levers: WLCA2, WL01CA2, WLH2, WL01H2, WLG2, WL01G2</p> <p>Adjustable Roller Levers: WLCA12, WL01CA12, WLH12, WL01H12, WLG12, WL01G12</p> <p>Adjustable Rod Levers: WLCL, WL01CL, WLHL, WL01HL, WLGL, WL01GL</p>   |  <p>Loosen the M5 x 12 bolt, set the actuator's position and then tighten the bolt again.</p>  |
| <p><b>Changing the orientation of the Head</b></p> <p>By removing the screws in the four corners of the Head, the Head can be set in any of the four directions. Be sure to change the plunger for internal operations at the same time. (The operational plunger does not need to be changed on overtravel general-purpose and high-sensitivity models.) The roller plunger can be set in either two positions at 90°. WLCA2-2N and WL01CA2-2N can only be set in either the forward or backward direction.</p>   | <p>Roller Levers: WLCAj , WL01CAj , WLGCAj</p> <p>Adjustable Rod Levers: WLCL, WL01CL</p> <p>Horizontal Plungers: WLSdj , WL01SDj</p> <p>Roller Plungers: WLD2, WL01D2</p> <p>Sealed Roller Plungers: WLD28, WL01D28.</p> <p><b>Note:</b> Does not include -RP60 Series or -141 Series.</p> |  <p>Head Loosen the screws.</p> <p>Head Loosen the screws.</p>   |
| <p><b>Changing the operating direction</b></p> <p>By removing the Head on models which can operate on one-side only, and then changing the direction of the operational plunger, one of three operating directions can be selected. In the case of overtravel models, as noted on page 20, by loosening the rubber holder using either a coin or a flat-blade screwdriver, and changing the direction of the internal rubber section, one of three operating directions can be selected.</p> <p>The tightening torque for the screws on the Head is 0.78 to 0.88 N S m. (8 to 9 kg S cm)</p> | <p>Roller Levers: WLCAj , WL01CAj</p> <p>Adjustable Roller Levers: WLCA12, WL01CA12</p> <p>Adjustable Rod Levers: WLCL, WL01CL</p> <p>Overtravel Models: WLCAj -2N, WL01CAj -2N</p> <p><b>Note:</b> The diagram at the right is not correct for the overtravel -2N models.</p>              | <p>The output of the Switch will be changed, regardless of which direction the lever is pushed.</p> <p>The output of the Switch will only be changed when the lever is pushed in one direction.</p>  <p>Operating Not operating Operating Not operating</p> <p>Operational plunger</p> <p>Operation in both directions Clockwise operation Counterclockwise operation</p> <p>For details on overtravel -2N models, refer to page 19.</p> |
| <p><b>Installing the roller on the inside</b></p> <p>By installing the roller lever in the opposite direction, the roller can be installed on the inside. (Set so that operation can be completed within a 180° level range.)</p>  | <p>Roller Levers: WLCAj , WL01CAj , except for the adjustable roller levers.</p> <p>Fork Lever Locks: WLCA32-4j , WL01CA32-4j</p>   |  <p>Loosen the Allen-head bolt.</p>  |
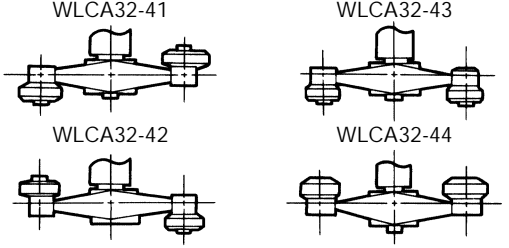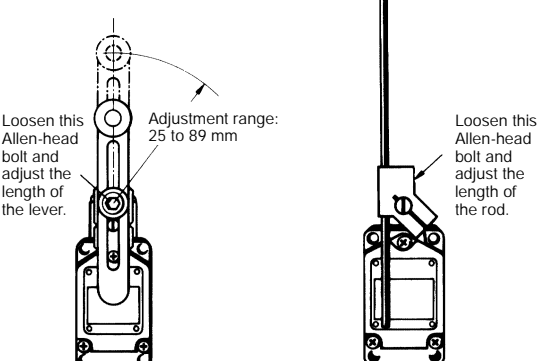
| Item   | Appropriate model/actuator   | Details  |
|--|--|--|
| <p><b>Selecting the roller position</b></p> <p>There are four types of fork lever lock for use depending on the roller position.</p>           | <p>Fork Lever Locks: WLCA32-4j , WL01CA32-4j</p>   |    |
| <p><b>Adjusting the length of the rod or lever</b></p> <p>The length of the rod or lever can be adjusted by loosening the Allen-head bolt.</p> | <p>Adjustable Roller Levers: WLCA12, WL01CA12 etc.</p> <p>Adjustable Rod Levers: WLCL, WL01CL etc.</p> | <p>WLCA12 etc.</p>  <p>Loosen this Allen-head bolt and adjust the length of the lever.</p> <p>Adjustment range: 25 to 89 mm</p> <p>Loosen this Allen-head bolt and adjust the length of the rod.</p> |



# Precautions

## Cautions

When a rod or wired-type actuator is used, do not touch the top end of the actuator. Doing so may result in injury.  
 Applicable models: WLHAL5 and WL01HAL5 Rod Spring Levers and WLNJ-S2 and WL01NJ-S2 Steel-wire Actuators.

## Correct Use

A short-circuit may cause damage to the Switch, so insert a circuit breaker fuse, of 1.5 to 2 times the rated current, in parallel with the Switch. In order to meet EN approval ratings, use a 10-A fuse that corresponds to IEC269, either a gI or gG.

When wiring terminal screws, use M4 round crimp terminals and tighten screws to the recommended torque. Wiring with broken wires, or the incorrect crimp terminals, or not tightening screws to the recommended torque can lead to short-circuits, leakage current, and fire.

When performing internal wiring there is a chance of short-circuit, leakage current, or fire, so be sure to protect the inside of the Switch from splashes of oil or water, corrosive gases, and cutting powder.

Using an inappropriate connector or assembling Switches incorrectly (assembly, tightening torque) can result in malfunction, leakage current, or fire, so be sure to read the instruction manual thoroughly beforehand.

Even when the connector is assembled and set correctly, the end of the cable and the inside of the Switch may come in contact. This can lead to malfunction, leakage current, or fire, so be sure to protect the end of the cable from splashes of oil or water and corrosive gases.

## Environmental Precautions

When the Switch is used in locations subject to splashes of water or oil, the material of the seal, which ensures the sealing properties of the Switch, may undergo changes in shape and quality. This is due to deterioration (including expansion and contraction), and may result in reduced performance, ineffective return, and ineffective sealing (leading to ineffective contact, insulation, leakage current, and fire). Confirm the possible effects of the operating environment on the Switch before use.


## Built-in Switch

Do not remove or replace the built-in switch. If the position of the built-in switch moves, it can cause reduced performance, and if the insulation sheet moves (separator), the insulation may become ineffective.

## Correct Tightening Torque

If screws are too loose they can lead to an early malfunction of the Switch, so ensure that all screws are tightened using the correct torque.

| No. | Type                                     | Torque             |
|-----|--|--------------------|
| A   | Head mounting screw                      | 0.78 to 0.88 N S m |
| B   | Cover mounting screw                     | 1.18 to 1.37 N S m |
| C   | Allen-head bolt (for securing the lever) | 4.90 to 5.88 N S m |
| D   | Terminal screw                           | 0.59 to 0.78 N S m |
| E   | Connector                                | 1.77 to 2.16 N S m |
| F   | Main Unit screws                         | 4.90 to 5.88 N S m |

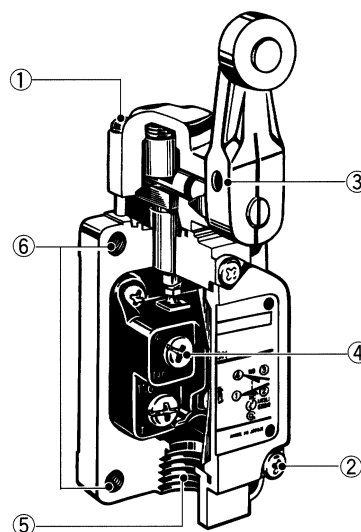

In particular, when changing the direction of the Head, make sure that all screws are tightened again to the correct torque. Do not allow foreign objects to fall into the Switch.

## Installing the Switch

To install the Switch, make a mounting panel, as shown in the following diagram, and tighten screws using the correct torque.

| Standard/Overtravel model   | Overtravel model (side installation)   |
|---|--|
| <p>Mounting holes</p> <p>Four, 5.2<sup>+0.2</sup>/<sub>0</sub> dia. holes</p> | <p>Mounting holes</p> <p>Two, 5.2<sup>+0.2</sup>/<sub>0</sub> dia. holes</p> |


**Connectors**

Either the easy-to-use Allen-head nut or the SC Connector can be used as connectors. To ensure high-sealing properties, use the SC Connector. (Refer to pages NO TAG to NO TAG.) (SC-1M to -5M and others.)

**Wiring**

Use 1.25-mm lead wires and M4-insulation covered crimp terminals for wiring.


**Crimp Terminal External Dimensions**



|         |          |
|---------|----------|
| dz dia. | 4.3      |
| D dia.  | 4.5      |
| B:      | 8.5      |
| L:      | 21.0     |
| F:      | 7.8      |
| l:      | 9.0 (mm) |

**Wiring Method**

Switch Box Section

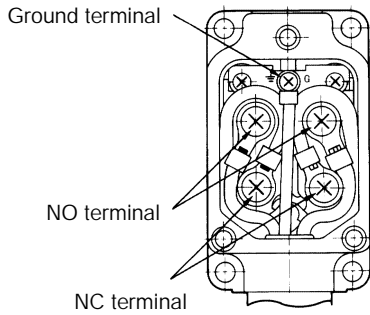


**Note:** The ground terminal is only installed on models with ground terminals.

**Rotating Lever Set Position**

All rotating lever models, except the fork lever lock, have a set position marker plate. (See page 7.) After operation, set the indicator needle on the marker plate so that is in the convex section of the bearing.

**Terminal Plate**

By using a short circuit plate, as shown in the following diagram, the Switch can be fabricated into a single-polarity double-break model. When ordering specify WL Terminal Plate (product code: WL-9662F).

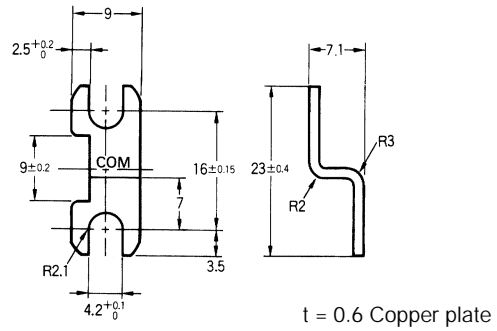

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**  
 To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.