

# Product datasheet

Specifications



Monolithic precabled tower light,  
Harmony XVC, plastic, red orange,  
40mm, base mounting, steady,  
IP54, 24V AC DC

XVC4B2K

## Main

Range Of Product	Harmony XVC4
Product Or Component Type	Complete pre-wired monolithic tower light
Beacon Or Indicator Bank Unit Type	2 illuminated units
Sound Signalling	Without
Mounting Diamete	40 mm
Component Name	XVC
Device Short Name	XVC
Light Source	LED steady red LED steady orange
Supply Circuit Type	AC/DC

## Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94HB): top cover
Mounting Location	On base
Product Mounting	On base
[Us] Rated Supply Voltage	24 V
[Us] Rated Supply Voltage	24 V
Cable Cross Section	0.33 mm <sup>2</sup>
Awg Gauge	AWG 22
Cable Length	500 mm
Marking	CE
[Uimp] Rated Impulse Withstand Voltage	0.8 kV
Current Consumption	50 mA
Flashing Frequency	1 Hz
Net Weight	0.12 kg
Height	135.5 mm

## Environment

Standards	IEC 61000-6-3 IEC 61000-6-2
Product Certifications	UL

<b>Protective Treatment</b>	TC
<b>Ambient Air Temperature For Storage</b>	-35...70 °C
<b>Ambient Air Temperature For Operation</b>	-10...50 °C
<b>Electrical Shock Protection Class</b>	Class II conforming to IEC 61140
<b>Overvoltage Category</b>	Class II conforming to IEC 61140
<b>Ip Degree Of Protection</b>	IP54 flat surface installation conforming to IEC 60529

## Packing Units

<b>Unit Type Of Package 1</b>	PCE
<b>Number Of Units In Package 1</b>	1
<b>Package 1 Height</b>	7.2 cm
<b>Package 1 Width</b>	7.0 cm
<b>Package 1 Length</b>	47.0 cm
<b>Package 1 Weight</b>	276.0 g
<b>Unit Type Of Package 2</b>	S04
<b>Number Of Units In Package 2</b>	12
<b>Package 2 Height</b>	30.0 cm
<b>Package 2 Width</b>	40.0 cm
<b>Package 2 Length</b>	60.0 cm
<b>Package 2 Weight</b>	5.376 kg

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency

## Well-being performance

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

**Eu Rohs Directive** [Pro-active compliance \(Product out of EU RoHS legal scope\)](#)

**China Rohs Regulation** [China RoHS declaration](#)

**Environmental Disclosure** [Product Environmental Profile](#)


**Circularity Profile** [End of Life Information](#)

Dimensions Drawings

Pre-assembled and Pre-wired Tower Light

**Dimensions**

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

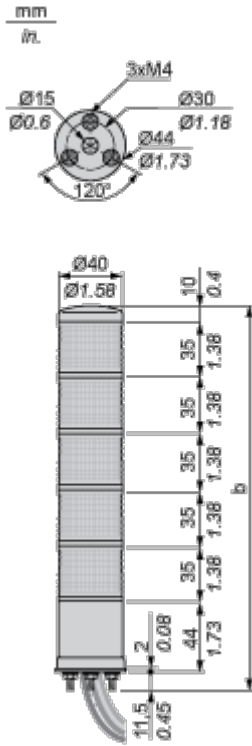

No. of illuminated units	b Without buzzer (mm)	b Without buzzer (in)
1 stage	100.50	3.96
2 stages	135.50	5.33
3 stages	170.50	6.71
4 stages	205.50	8.09
5 stages	240.50	9.47

Mounting and Clearance

**Pre-assembled and Pre-wired Tower Light**

---

**Direct Mounting on Horizontal Support**

Panel cut-out

mm  
in.

