

Product data sheet

Specifications



Monolithic pre wired tower light, Harmony XVC, plastic, red orange green, 40mm, tube mounting, steady or flashing, buzzer, IP23, 24V AC DC

XVC4B35S

Product availability: Stock - Normally stocked in distribution facility

Price*: 309.00 USD

Main

| | |
|------------------------------------|---|
| Range Of Product | Harmony XVC4 |
| Product Or Component Type | Complete pre-wired monolithic tower light |
| Beacon Or Indicator Bank Unit Type | 3 illuminated units |
| Sound Signalling | Buzzer |
| Mounting Diamete | 1.57 in (40 mm) |
| Component Name | XVC |
| Device Short Name | XVC |
| Light Source | LED steady or flashing red LED steady or flashing orange LED steady or flashing green |
| Supply Circuit Type | AC/DC |
| Noise Level | 70...85 dB continuous or intermittent tone)1 m |

Complementary

| | |
|--|---|
| Material | Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94HB): top cover SGP (chromium-plated): support tube |
| Mounting Location | On support tube, 17 mm |
| Product Mounting | On support tube, 17 mm |
| [Us] Rated Supply Voltage | 24 V |
| [Us] Rated Supply Voltage | 24 V |
| Cable Cross Section | 0.00 in ² (0.33 mm ²) |
| Awg Gauge | AWG 22 |
| Cable Length | 35.43 in (900 mm) |
| Marking | CE |
| [Uimp] Rated Impulse Withstand Voltage | 0.8 kV |
| Current Consumption | 115 mA |
| Fundamental Frequency | 2.23 kHz |
| Flashing Frequency | 1 Hz |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

| | |
|------------|-----------------------|
| Net Weight | 1.41 lb(US) (0.64 kg) |
| Height | 23.41 in (594.5 mm) |

Environment

| | |
|---------------------------------------|--|
| Standards | IEC 61000-6-2 IEC 61000-6-3 |
| Product Certifications | UL |
| Protective Treatment | TC |
| Ambient Air Temperature For Storage | -31...158 °F (-35...70 °C) |
| Ambient Air Temperature For Operation | 14...122 °F (-10...50 °C) |
| Electrical Shock Protection Class | Class I IEC 61140 |
| Overvoltage Category | Class I IEC 61140 |
| Ip Degree Of Protection | IP23 vertical surface installation IEC 60529 |

Ordering and shipping details

| | |
|-------------------|---------------|
| Category | US100XV22617 |
| Discount Schedule | 00XV |
| Gtin | 3606480032493 |
| Returnability | Yes |
| Country Of Origin | US |

Packing Units

| | |
|------------------------------|------------------------|
| Unit Type Of Package 1 | PCE |
| Number Of Units In Package 1 | 1 |
| Package 1 Height | 2.76 in (7.0 cm) |
| Package 1 Width | 2.76 in (7.0 cm) |
| Package 1 Length | 29.53 in (75.0 cm) |
| Package 1 Weight | 24.59 oz (697.0 g) |
| Unit Type Of Package 2 | P06 |
| Number Of Units In Package 2 | 10 |
| Package 2 Height | 17.72 in (45.0 cm) |
| Package 2 Width | 23.62 in (60.0 cm) |
| Package 2 Length | 31.50 in (80.0 cm) |
| Package 2 Weight | 41.45 lb(US) (18.8 kg) |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency

Well-being performance

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

Eu Rohs Directive [Pro-active compliance \(Product out of EU RoHS legal scope\)](#)

China Rohs Regulation [China RoHS declaration](#)

Environmental Disclosure [Product Environmental Profile](#)

Circularity Profile [End of Life Information](#)


California Proposition 65 **WARNING:** This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b1 dimension.

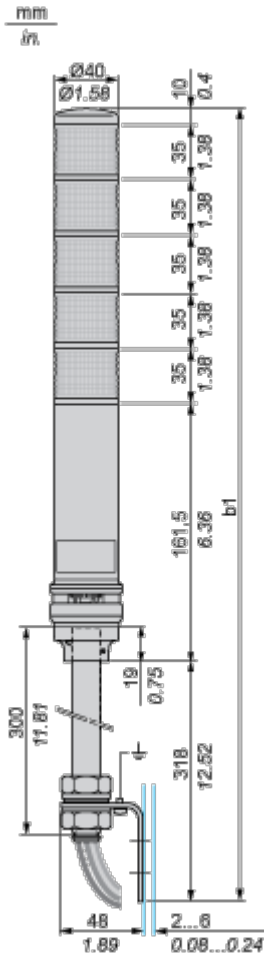

| No. of illuminated units | b1 With buzzer (mm) | b1 With buzzer (in.) |
|--------------------------|---------------------|----------------------|
| 1 stage | 524.50 | 20.65 |
| 2 stages | 559.50 | 22.03 |
| 3 stages | 594.50 | 23.41 |
| 4 stages | 629.50 | 24.78 |
| 5 stages | 664.50 | 26.16 |

Mounting and Clearance

Pre-assembled and Pre-wired Tower Light

Support Tube Mounting

