

Product data sheet

Specifications



Prewired rotating mirror beacon, Harmony XVR, 120mm, red, without buzzer, 24V AC/DC

XVR12B04

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 198.00 USD

Main

Range Of Product	Harmony XVR
Product Or Component Type	Prewired rotating mirror beacon
Sound Signalling	Without
Device Short Name	XVR
Mounting Diamete	4.72 in (120 mm)
Ip Degree Of Protection	IP23 IEC 60529
[Us] Rated Supply Voltage	24 V AC/DC
Light Source	High luminosity LED, red

Complementary

Material	ABS (acrylonitrile butadiene-styrene): body part AS: globe
Cad Overall Width	4.72 in (120 mm)
Cad Overall Depth	4.72 in (120 mm)
Net Weight	1.10 lb(US) (0.5 kg)
Marking	CE
Product Mounting	By 3 M5 screws
Supply Voltage Limits	19...30 V DC 21.6...26.4 V AC
[Uimp] Rated Impulse Withstand Voltage	0.8 kV
Current Consumption	125 mA
Flashing Frequency	2.3 Hz
Clamping Connection Capacity	0.83 mm ²
Awg Gauge	AWG 18
Cable Length	15.75 in (400 mm)

Environment

Standards	IEC 61000-6-2 IEC 61000-6-4
Protective Treatment	TC
Ambient Air Temperature For Storage	-31...158 °F (-35...70 °C)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Ambient Air Temperature For Operation	14...122 °F (-10...50 °C)
--	---------------------------

Electrical Shock Protection Class	Class II IEC 61140
--	--------------------

Ordering and shipping details

Category	US100XV22617
-----------------	--------------

Discount Schedule	00XV
--------------------------	------

Gtin	3606480033155
-------------	---------------

Returnability	No
----------------------	----

Country Of Origin	ID
--------------------------	----

Packing Units

Unit Type Of Package 1	PCE
-------------------------------	-----

Number Of Units In Package 1	1
-------------------------------------	---

Package 1 Height	7.68 in (19.5 cm)
-------------------------	-------------------

Package 1 Width	5.43 in (13.8 cm)
------------------------	-------------------

Package 1 Length	5.51 in (14 cm)
-------------------------	-----------------

Package 1 Weight	21.59 oz (612 g)
-------------------------	------------------

Unit Type Of Package 2	S04
-------------------------------	-----

Number Of Units In Package 2	8
-------------------------------------	---

Package 2 Height	11.81 in (30 cm)
-------------------------	------------------

Package 2 Width	15.75 in (40 cm)
------------------------	------------------

Package 2 Length	23.62 in (60 cm)
-------------------------	------------------

Package 2 Weight	13.64 lb(US) (6.186 kg)
-------------------------	-------------------------

Contractual warranty

Warranty	18 months
-----------------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.


[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

 **Rohs Exemption Information** Yes


Certifications & Standards

Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Rotating Mirror Beacon

Dimensions

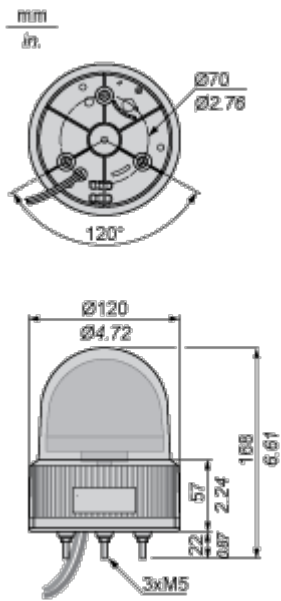

Mounting and Clearance

Rotating Mirror Beacon

Panel Cut-out

