

Product data sheet

Specifications



Head for push button, Harmony XB4, pushbutton harsh environment, white, without marking

ZB4BC180

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 50.70 USD

Main

Range of Product	Harmony XB4
Product or Component Type	Head for push-button
Device short name	ZB4
Bezel material	Chromium plated metal
Head type	Standard
Mounting diameter	0.9 in (22.5 mm)
Sale per indivisible quantity	1
Cap/operator or lens colour	White

Complementary

CAD overall width	1.5 in (37 mm)
CAD overall height	0.7 in (18.5 mm)
CAD overall depth	1.5 in (37 mm)
Net Weight	0.079 lb(US) (0.036 kg)
Electrical shock protection class	Class I IEC 61140
Shape of signaling unit head	Round
Type of operator	spring return
Operator profile	White flush, unmarked
Operator additional information	Vertical mounting Horizontal mounting
Mechanical durability	10000000 cycles
Vibration resistance	5 gn 2...500 Hz)IEC 60068-2-6
Shock resistance	30 gn 18 ms) half sine wave acceleration IEC 60068-2-27
Main group	Harsh environment
Group of product	Flush unmarked
Marking	Unmarked
Electrical composition code	C1 9 single front mounting C2 9 single and double front mounting C11 3 single front mounting C15 1 single front mounting
device presentation	Basic element

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Environment

Ambient Air Temperature for Storage	-40.0000000000...185.0000000000 °F (-40...85 °C)
Ambient Air Temperature for Operation	-40.0000000000...158.0000000000 °F (-40...70 °C)
IP degree of protection	IP66 IEC 60529 IP69K IP67 IP69
NEMA degree of protection	NEMA 4 UL 508 NEMA 13 NEMA 12
Resistance to high pressure washer	0.01 psi (90 Pa) 180.5 °F (82.5 °C)
IK degree of protection	IK06 conforming to IEC 62262
Standards	IEC 60947-1 IEC 60947-5-1 CSA C22.2 UL 508
Product Certifications	UL CSA CE

Ordering and shipping details

Category	US10CS222468
Discount Schedule	0CS2
GTIN	3606480444098
Returnability	No
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.48 in (3.76 cm)
Package 1 Width	1.5 in (3.7 cm)
Package 1 Length	1.5 in (3.7 cm)
Package 1 Weight	1.2 oz (34.0 g)

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

Reach Free Of Svhc

Toxic Heavy Metal Free

Mercury Free

Rohs Exemption Information Yes

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)

China Rohs Regulation

[China RoHS declaration](#)

Environmental Disclosure

[Product Environmental Profile](#)

Circularity Profile


[End of Life Information](#)

California Proposition 65

WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings


Dimensions

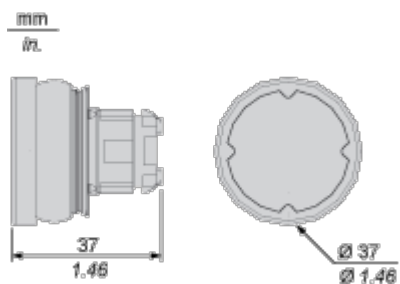

Mounting and Clearance


Installation on Flat Surface

Without Protective Guard

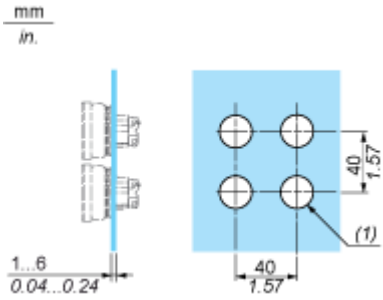

(1) $\varnothing 22.5$ mm recommended ($\varnothing 22.3_0^{+0.4}$) / $\varnothing 0.89$ in. recommended ($\varnothing 0.88_0^{+0.016}$)


With Protective Guard

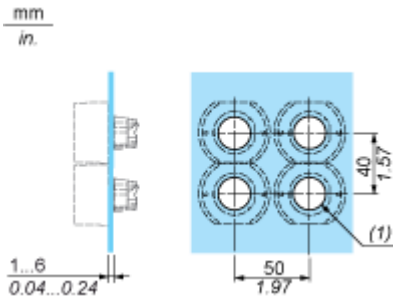


(1) $\varnothing 22.5$ mm recommended ($\varnothing 22.3_0^{+0.4}$) / $\varnothing 0.89$ in. recommended ($\varnothing 0.88_0^{+0.016}$)

Technical Description

Electrical Composition Corresponding to Code C1



Electrical Composition Corresponding to Code C2




Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1




Electrical Composition Corresponding to Code C15

1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



Legend

Single contact



Double contact



Light block



Possible location

