

# SAC-8P-MS/ 3,0-542/ FS SCO BK - Sensor/actuator cable



1417912

<https://www.phoenixcontact.com/nz/products/1417912>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 8-position, PVC, yellow, Plug straight M12, coding: A, on Socket straight M12, coding: A, cable length: 3 m

## Commercial data

Item number	1417912
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	BF1ICD
Product key	BF1ICD
GTIN	4055626211312
Weight per piece (including packing)	160.84 g
Weight per piece (excluding packing)	22.22 g
Country of origin	US

# SAC-8P-MS/ 3,0-542/ FS SCO BK - Sensor/actuator cable



1417912

<https://www.phoenixcontact.com/nz/products/1417912>

## Technical data

### Product properties

Product type	Sensor/actuator cable
Number of positions	8
Application	Standard, U.S. cables
No. of cable outlets	1
Shielded	no
Coding	A

### Insulation characteristics

Overvoltage category	II
Degree of pollution	3

### Material specifications

Flammability rating according to UL 94	HB
Seal material	NBR
Material of grip body	TPU, hardly inflammable, self-extinguishing
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material for screw connection	Zinc die-cast, nickel-plated
Outer sheath, material	PVC

### Electrical properties

Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage $U_N$	30 V AC
	30 V DC
Nominal current $I_N$	2 A
Protective circuit	unwired

### Mechanical properties

#### Mechanical data

Insertion/withdrawal cycles	$\geq 100$
-----------------------------	------------

### Signaling

Status display	No
Status display present	No

### Connection data

#### Conductor connection

Tightening torque	0.4 Nm (M12 connector)
-------------------	------------------------

# SAC-8P-MS/ 3,0-542/ FS SCO BK - Sensor/actuator cable

1417912

<https://www.phoenixcontact.com/nz/products/1417912>

## Connector

### Connection 1

Type	Plug straight M12
Number of positions	8
Coding type	A


### Connection 2

Type	Socket straight M12
Number of positions	8
Coding type	A

## Cable/line

Cable length	3 m
--------------	-----

### PVC yellow 105 °C [542]

Dimensional drawing	
Cable weight	44 kg/km
UL AWM Style	2517 (105 °C / 300 V)
Number of positions	8
Shielded	no
Cable type	PVC yellow 105 °C [542]
Conductor structure signal line	32x 1.10 mm
AWG signal line	24
Wire diameter incl. insulation	1.12 mm ±0.03 mm
External cable diameter	5.70 mm ±0.2 mm
Outer sheath, material	PVC
External sheath, color	yellow
Conductor material	Tin-plated Cu litz wires
Material, filler	PP
Material wire insulation	PVC
Single wire, color	white, brown, green, yellow, gray, pink, blue, red
Overall twist	8 wires around filler to the core
Max. conductor resistance	max. 79.7 Ω/km (20 °C)
Insulation resistance	≥ (550 M Ohms/m @ 500V)
Nominal voltage, cable	300 V
Minimum bending radius, flexible installation	8 x D

# SAC-8P-MS/ 3,0-542/ FS SCO BK - Sensor/actuator cable



1417912

<https://www.phoenixcontact.com/nz/products/1417912>

Smallest bending radius, movable installation	46 mm
Flame resistance	FT1, VW-1
Other resistance	UV resistant
Ambient temperature (operation)	-30 °C ... 105 °C (cable, fixed installation)
	-5 °C ... 105 °C (Cable, flexible installation)

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP65
	IP67
	IP68
Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket)
	-40 °C ... 80 °C (cable, fixed installation)
	-5 °C ... 80 °C (Cable, flexible installation)

## Standards and regulations

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101


# SAC-8P-MS/ 3,0-542/ FS SCO BK - Sensor/actuator cable

1417912

<https://www.phoenixcontact.com/nz/products/1417912>


## Drawings

Dimensional drawing

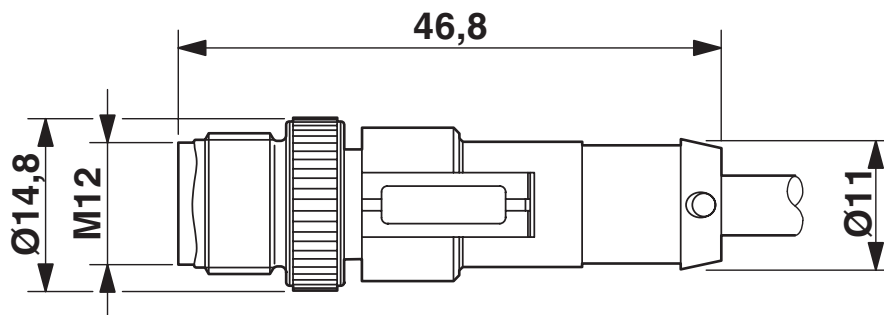

Plug, M12 x 1, straight, shielded

Dimensional drawing

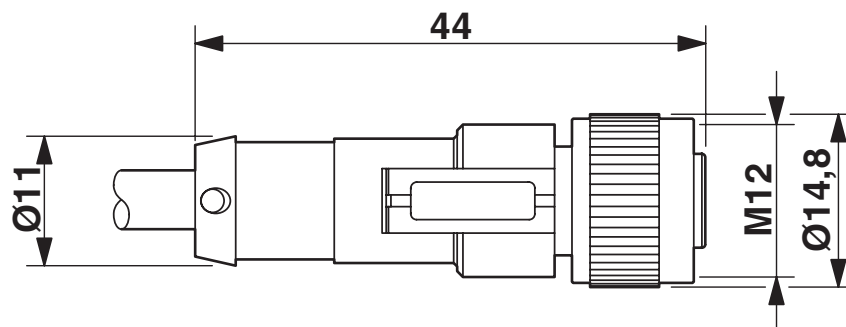

M12 x 1 socket, straight


# SAC-8P-MS/ 3,0-542/ FS SCO BK - Sensor/actuator cable



1417912

<https://www.phoenixcontact.com/nz/products/1417912>

Schematic diagram

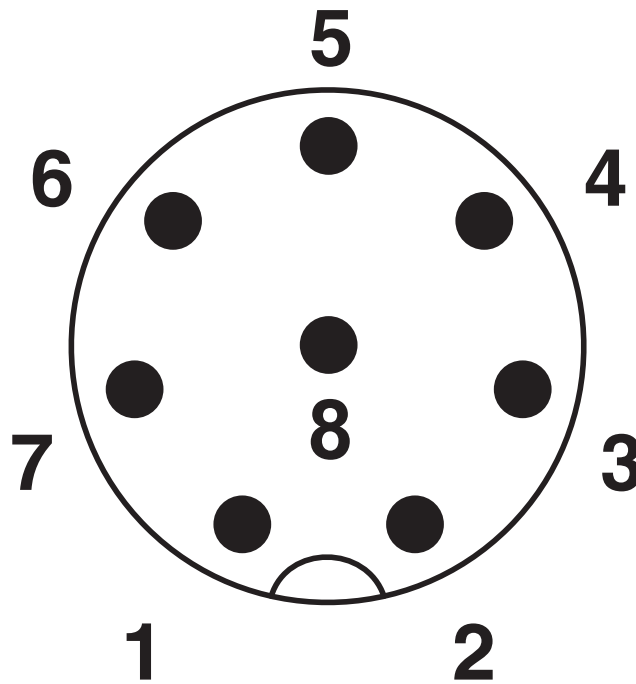

Pin assignment M12 plug, 8-pos., A-coded, view plug side

Circuit diagram




# SAC-8P-MS/ 3,0-542/ FS SCO BK - Sensor/actuator cable

1417912

<https://www.phoenixcontact.com/nz/products/1417912>

Schematic diagram

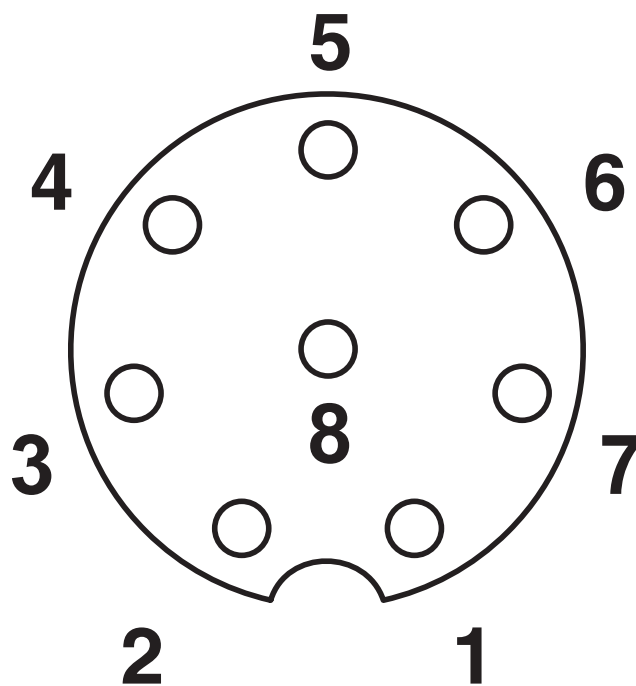

Pin assignment M12 socket, 8-pos., A-coded, view female side

# SAC-8P-MS/ 3,0-542/ FS SCO BK - Sensor/actuator cable





1417912


<https://www.phoenixcontact.com/nz/products/1417912>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/nz/products/1417912>

 <b>UL Listed</b> Approval ID: FILE E 221474				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	30 V	2 A	-	-

 <b>cUL Listed</b> Approval ID: FILE E 221474				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	30 V	2 A	-	-

 <b>EAC-RoHS</b> Approval ID: RU D-DE.HB35.B.00387	
---	--

<b>cULus Listed</b>
---------------------



# SAC-8P-MS/ 3,0-542/ FS SCO BK - Sensor/actuator cable



1417912

<https://www.phoenixcontact.com/nz/products/1417912>

## Classifications

### ECLASS

ECLASS-11.0	27060311
ECLASS-12.0	27060311
ECLASS-13.0	27060311

### ETIM

ETIM 8.0	EC001855
----------	----------

### UNSPSC

UNSPSC 21.0	26121600
-------------	----------

# SAC-8P-MS/ 3,0-542/ FS SCO BK - Sensor/actuator cable



1417912

<https://www.phoenixcontact.com/nz/products/1417912>

## Environmental product compliance

China RoHS	Environmentally Friendly Use Period = 50 years For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"
------------	--

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd  
Unit 15C, 906-930 Great South Road, Penrose  
Auckland 1061  
0508 474 636  
[sales@phoenixcontact.co.nz](mailto:sales@phoenixcontact.co.nz)