

SACC-CI-M12FS-8CON-L90 SH SCO - Contact carrier



1437009

<https://www.phoenixcontact.com/no/products/1437009>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact carrier, 8-position, Socket, angled, M12-SPEEDCON, coding: A, PCB mounting, Wave soldering, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239641

Your advantages

- Reduced mounting costs thanks to two-piece device connector
- All common pin assignments and codings available
- Easy device integration thanks to mechanical port screw connections with threaded attachment, press-in contour or direct integration in the front plate
- Additional gasket for the device when not plugged in

Commercial data

Item number	1437009
Packing unit	20 pc
Minimum order quantity	20 pc
Sales key	31BAB
Product key	ABQAHG
Catalog page	Page 252 (C-2-2013)
GTIN	4046356438575
Weight per piece (including packing)	5.715 g
Weight per piece (excluding packing)	5.295 g
Customs tariff number	85366990
Country of origin	DE

1437009

<https://www.phoenixcontact.com/no/products/1437009>

Technical data

Notes

General	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
---------	--

Product properties

Product type	Contact insert
Number of positions	8
Application	Signal
Seal present	yes
Shielded	yes
Coding	A
Thread type	M12

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	0.8 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U_N	30 V
Nominal current I_N	2 A

Connection data

Connection method	Wave soldering
-------------------	----------------

Material specifications

Flammability rating according to UL 94	V0
Seal material	FKM / EPDM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6.6

Connector

Connection 1

Head design	Socket
Head cable outlet	angled
Head thread type	M12

SACC-CI-M12FS-8CON-L90 SH SCO - Contact carrier



1437009

<https://www.phoenixcontact.com/no/products/1437009>

Head locking type	SPEEDCON
Coding	A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
	IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)
	-40 °C ... 85 °C (without mechanical actuation)

Standards and regulations

M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

Mounting

Mounting type	PCB mounting
---------------	--------------

Packaging specifications


Type of packaging	Blister
-------------------	---------

1437009

<https://www.phoenixcontact.com/no/products/1437009>

Drawings

Schematic diagram

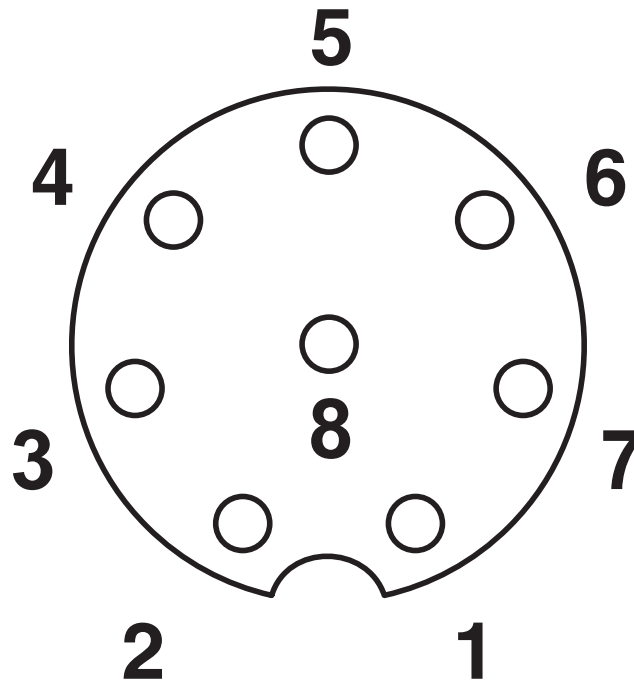

Pin assignment M12 socket, 8-pos., A-coded, view female side

SACC-CI-M12FS-8CON-L90 SH SCO - Contact carrier




1437009

<https://www.phoenixcontact.com/no/products/1437009>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/no/products/1437009>

 UL Recognized Approval ID: E118976-20100522	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	30 V	2 A	24 - 24	-

1437009

<https://www.phoenixcontact.com/no/products/1437009>

Classifications

ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27460201

ETIM

ETIM 9.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

1437009

<https://www.phoenixcontact.com/no/products/1437009>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT AS

Strømsveien 344

N-1081 Oslo

+47 22 07 68 00

norge@phoenixcontact.com