

PR1-RSC3-LV-230AC/2X21AU - Relay Module



2834559

<https://www.phoenixcontact.com/us/products/2834559>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Pre-assembled relay modules with screw connection, consisting of: relay base, plug-in multi-layer contact relay, plug-in display/interference suppression module, and retaining bracket. Input voltage: 230 V AC, 2 changeover contacts, 8 A

Your advantages

- Safe isolation between coil and contact side
- Logical contact arrangement thanks to 1/3-level relay base
- Operational reliability thanks to sealed relay

Commercial data

Item number	2834559
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	C463
Product key	CK631G
Catalog page	Page 395 (C-7-2015)
GTIN	4046356044448
Weight per piece (including packing)	69.85 g
Weight per piece (excluding packing)	64.236 g
Customs tariff number	85364900
Country of origin	CN

PR1-RSC3-LV-230AC/2X21AU - Relay Module



2834559

<https://www.phoenixcontact.com/us/products/2834559>

Set consists of

PR1-BSC3/2X21 - Relay base

2833521

<https://www.phoenixcontact.com/us/products/2833521>




PR1... relay base, for miniature power relays or miniature switching relays with 1 or 2 changeover contacts or solid-state relays of the same design, 1/3-level version, screw connections, plug-in option for input/interference suppression modules

REL-MR-230AC/21-21AU - Single relay

2961480

<https://www.phoenixcontact.com/us/products/2961480>



Plug-in miniature power relay, with multi-layer gold contact, 2 changeover contacts, input voltage 230 V AC

PR1-RSC3-LV-230AC/2X21AU - Relay Module



2834559

<https://www.phoenixcontact.com/us/products/2834559>

LV-120-230AC/110DC - Plug-in module

2833738

<https://www.phoenixcontact.com/us/products/2833738>



Plug-in module, with varistor and yellow LED, input voltage: 120 ... 230 V AC / 110 V DC ± 20 %

EL1-P16 - Retaining bracket

2833547

<https://www.phoenixcontact.com/us/products/2833547>



Relay retaining bracket, with eject function and integrated equipment marking area (7.5 x 15 mm), to suit relay base PR1, for 16 mm high miniature power relay and solid-state relay

PR1-RSC3-LV-230AC/2X21AU - Relay Module



2834559

<https://www.phoenixcontact.com/us/products/2834559>

MP 1 - Marker labels

2833631

<https://www.phoenixcontact.com/us/products/2833631>

Equipment marker, labeling surface 6 x 15 mm



PR1-RSC3-LV-230AC/2X21AU - Relay Module



2834559

<https://www.phoenixcontact.com/us/products/2834559>

Technical data

Product properties

Product type	Relay Module
Application	Universal
Operating mode	100% operating factor
Mechanical service life	3x 10 ⁷ cycles

Insulation characteristics

Overvoltage category	III
Pollution degree	3

Electrical properties

Service life electrical	see diagram
Maximum power dissipation for nominal condition	1.38 W
Test voltage (Winding/contact)	4 kV (50 Hz, 1 min., winding/contact)
Test voltage (Contact/contact)	2.5 kV (50 Hz, 1 min., contact/contact)

Input data

Coil side

Nominal input voltage U_N	230 V AC
Input voltage range	179.4 V AC ... 356.5 V AC
Drive and function	monostable
Typical input current at U_N	6 mA (at 50 Hz) 5.5 mA (At 60 Hz)
Typical response time	3 ms ... 12 ms
Typical release time range	2 ms ... 22 ms
Protective circuit	Varistor
Operating voltage display	Yellow LED

Output data

Switching

Contact switching type	2 changeover contacts
Type of switch contact	Single contact
Contact material	AgNi, hard gold-plated
Maximum switching voltage	30 V AC 36 V DC
Minimum switching voltage	100 mV (at 10 mA)
Limiting continuous current	50 mA
Maximum inrush current	50 mA
Min. switching current	1 mA (at 24 V)
Interrupting rating (ohmic load) max.	1.2 W (at 24 V DC)

PR1-RSC3-LV-230AC/2X21AU - Relay Module



2834559

<https://www.phoenixcontact.com/us/products/2834559>

Switching: when the gold layer is destroyed

Note	the following values are applicable if a gold layer is destroyed
Contact material	AgNi
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	5 V
Limiting continuous current	8 A
Maximum inrush current	15 A (300 ms)
Min. switching current	10 mA
Interrupting rating (ohmic load) max.	2000 VA (for 250 V AC)
Switching capacity	2 A (at 24 V, DC13)
	0.2 A (at 110 V, DC13)
	0.2 A (at 250 V, DC13)
	2 A (at 24 V, AC15)
	2 A (at 120 V, AC15)
	2 A (at 250 V, AC15)

Connection data

Coil side

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.14 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 2.5 mm ²
Conductor cross section AWG	26 ... 14

Contact side

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.14 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 2.5 mm ²
Conductor cross section AWG	26 ... 14

Dimensions

Width	16 mm
Height	78.5 mm
Depth	71 mm

Material specifications

Color	green (RAL 6021)
-------	------------------

Environmental and real-life conditions

PR1-RSC3-LV-230AC/2X21AU - Relay Module



2834559

<https://www.phoenixcontact.com/us/products/2834559>

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C

Standards and regulations

Standards/regulations	IEC 60664
	EN 50178

Mounting

Mounting type	DIN rail mounting
Assembly instructions	in rows with zero spacing
Mounting position	any

PR1-RSC3-LV-230AC/2X21AU - Relay Module


2834559

<https://www.phoenixcontact.com/us/products/2834559>




Drawings

Circuit diagram

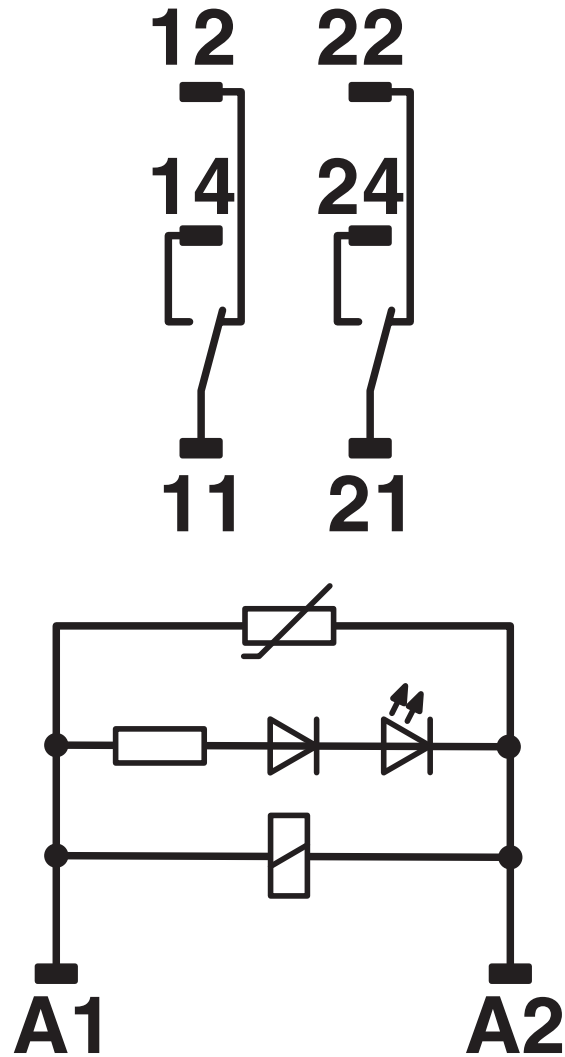


Diagram

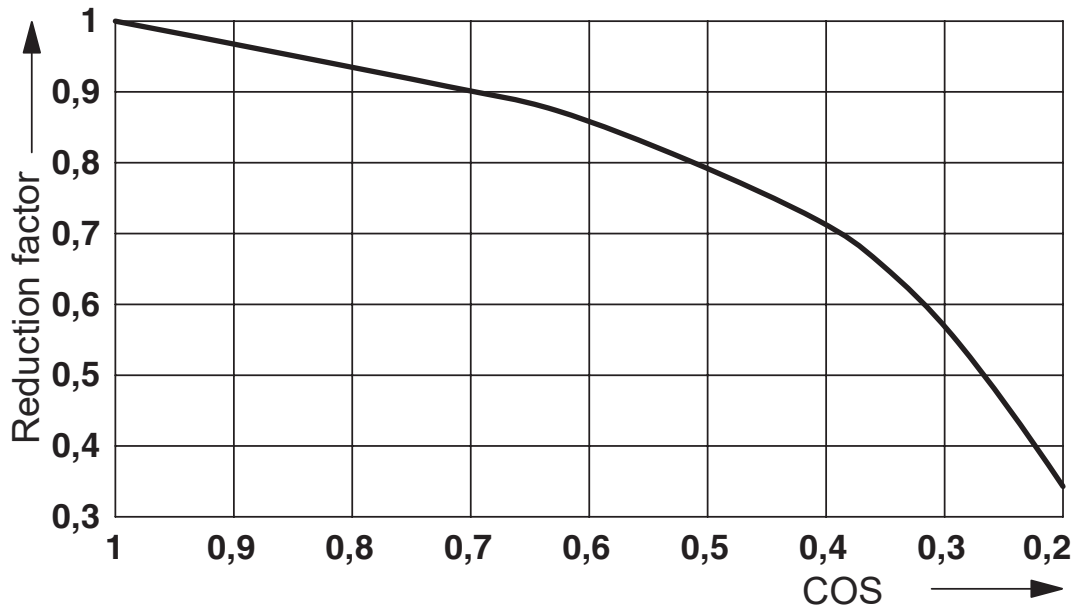

Service life reduction factor with various cos phi


Diagram

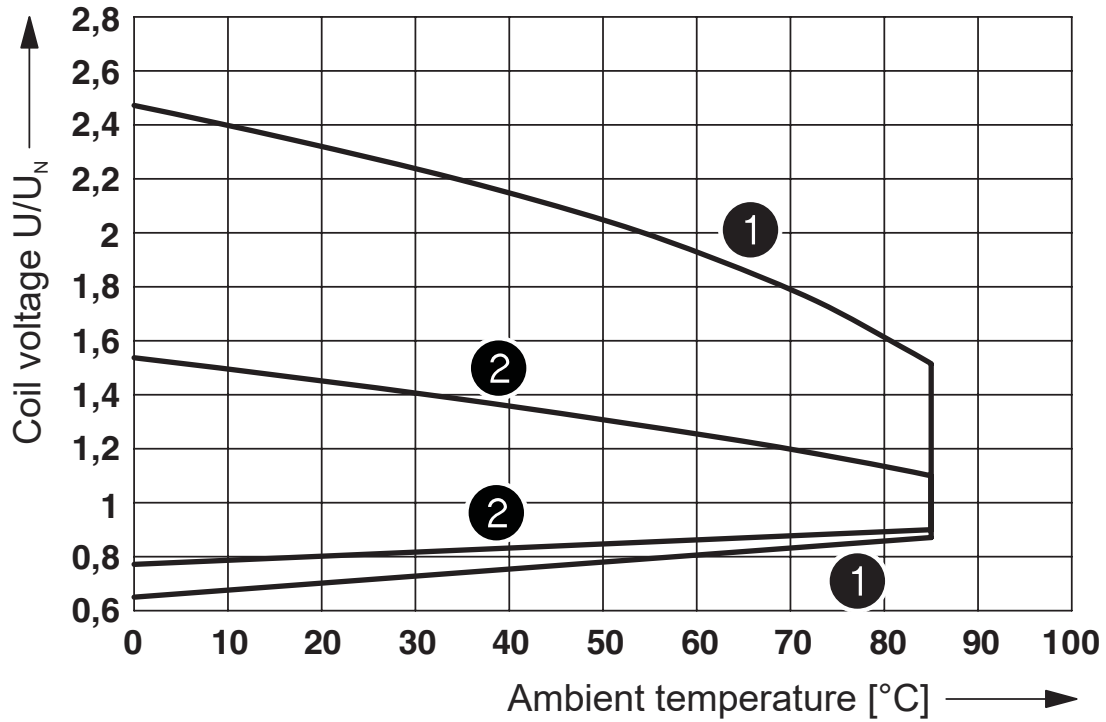

- ① DC coils
- ② AC coils


Operating voltage range of the relay

Diagram

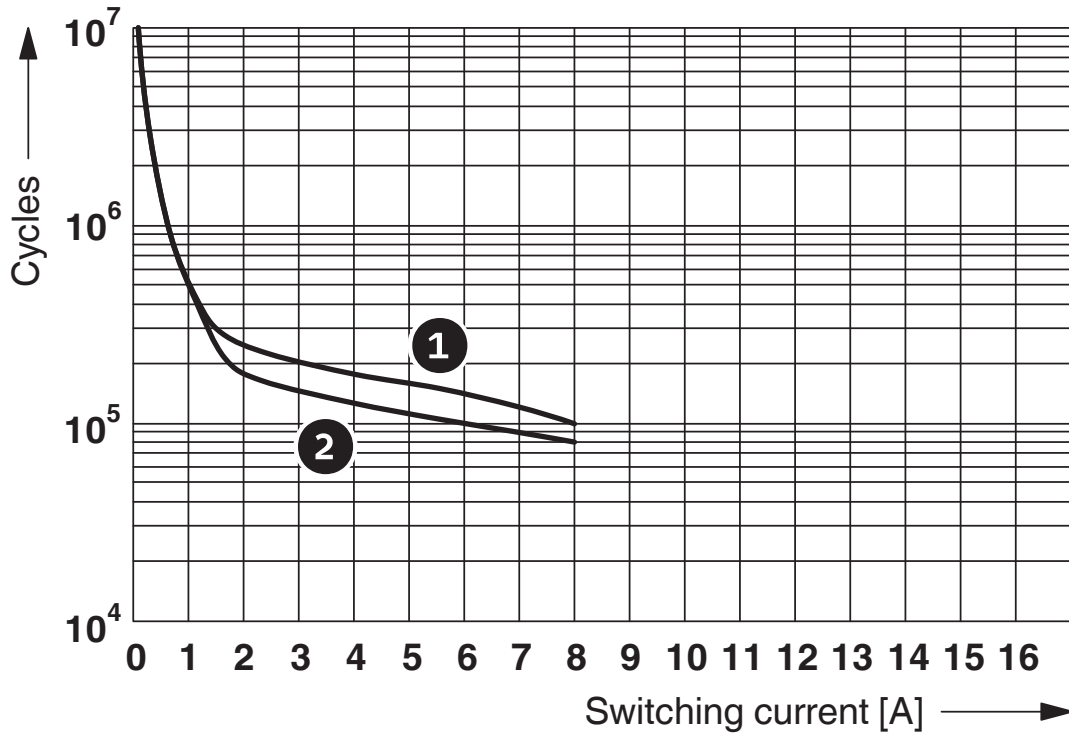

- ① 250 V AC, ohmic load (DC coils)
- ② 250 V AC, ohmic load (AC coils)

Electrical service life

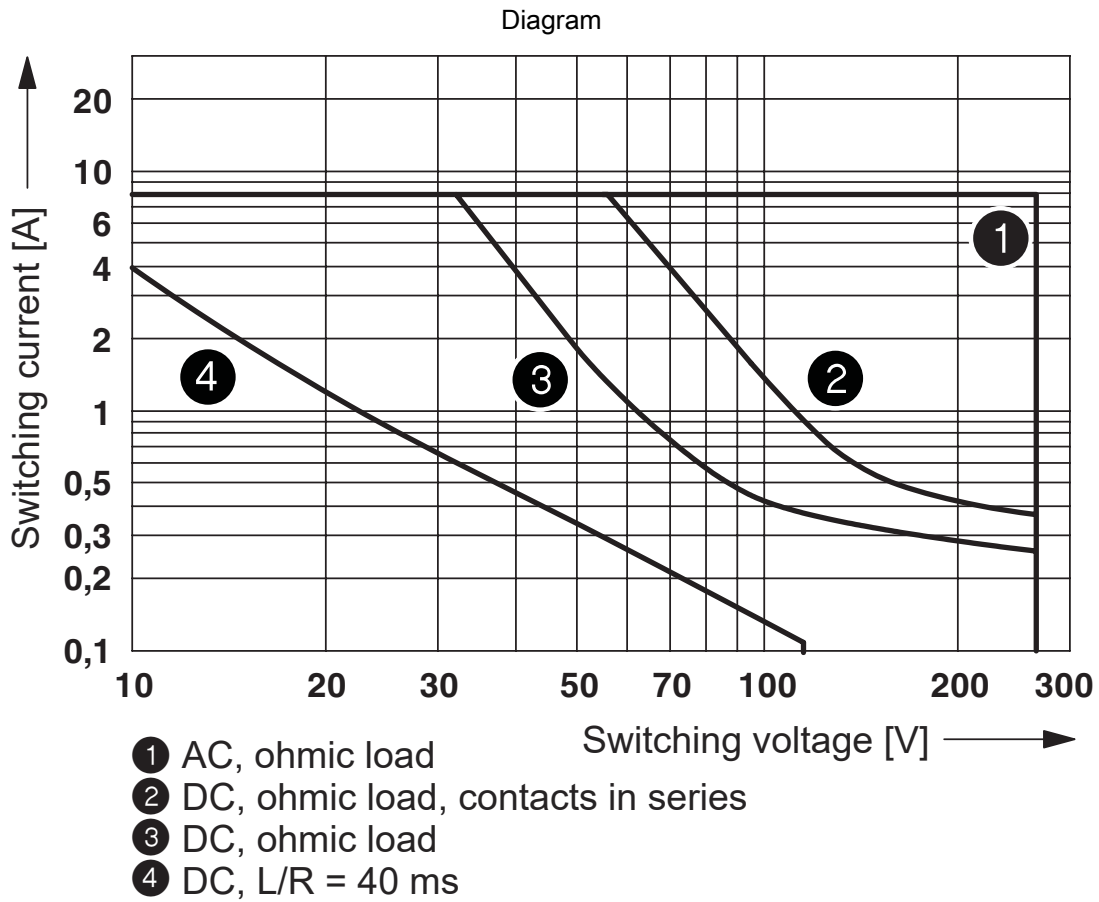

Interrupting rating

PR1-RSC3-LV-230AC/2X21AU - Relay Module



2834559

<https://www.phoenixcontact.com/us/products/2834559>

Classifications

ECLASS

ECLASS-11.0

27371601

UNSPSC

UNSPSC 21.0

39122334

PR1-RSC3-LV-230AC/2X21AU - Relay Module



2834559

<https://www.phoenixcontact.com/us/products/2834559>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

PR1-RSC3-LV-230AC/2X21AU - Relay Module



2834559

<https://www.phoenixcontact.com/us/products/2834559>


Accessories

MP 1 - Marker labels

2833631

<https://www.phoenixcontact.com/us/products/2833631>

Equipment marker, labeling surface 6 x 15 mm



EML (15X6)R YE - Label

0819288

<https://www.phoenixcontact.com/us/products/0819288>



Label, Roll, yellow, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: adhesive, lettering field size: 15 x 6 mm, Number of individual labels: 2500

PR1-RSC3-LV-230AC/2X21AU - Relay Module



2834559

<https://www.phoenixcontact.com/us/products/2834559>

DB 50- 90 BU - Wire bridge

2821180

<https://www.phoenixcontact.com/us/products/2821180>

Flexible wire loop bridge, 50-pos., conductor cross-section: 0.5 mm², loop length: 90 mm, ferrule length: 8 mm, color: blue



DB 50- 90 BK - Wire bridge

2820916

<https://www.phoenixcontact.com/us/products/2820916>

Flexible wire loop bridge, 50-pos., conductor cross-section: 0.5 mm², loop length: 90 mm, ferrule length: 8 mm, color: black



PR1-RSC3-LV-230AC/2X21AU - Relay Module



2834559

<https://www.phoenixcontact.com/us/products/2834559>

DB 50- 90 GY - Wire bridge

2820929

<https://www.phoenixcontact.com/us/products/2820929>

Flexible wire loop bridge, 50-pos., conductor cross-section: 0.5 mm², loop length: 90 mm, ferrule length: 8 mm, color: gray



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com