

Product datasheet

Specifications



Panel PC Universal - Flash Disk - 15" - AC - 0 slot - fanless

HMIPUF7A0P01

⚠ Discontinued on: 15 Feb 2024

⚠ Discontinued

Main

Range of product	Harmony iPC
Product or component type	PC panel
Processor name	Atom N270 1.66 GHz L2 cache 512 KB
Chipset type	Intel 945GME at 533 MHz
display size	15 inch
Display colour	16 million colours
Luminance	350 cd/m ²
Video controller type	Intel Graphics Media Accelerator (GMA) 950, 224 MB
Operating system	MS Windows XP Professional Edition SP3multi-language
Software package	Vijeo Designer run time demo
Bezel material	Aluminium alloy

Complementary

Terminal type	Touchscreen display
Data storage equipment	>= 60 GB Flash disk SSD with MLC technology 2000000 h mtbf
Display type	Active matrix colour TFT LCD with LED backlight
display resolution	1024 x 768 pixels XGA
View angle horizontal x vertical	160 x 100°
Touch panel	Analogue resistive
Memory type	512 KB SRAM 2 GB RAM DDR3
Type of cooling	Fanless
Integrated connection type	2 Ethernet TCP/IP - RJ45 DVI-I video port - DVI-I COM1 serial link - male SUB-D 9 - RS232C (rate: 115 kbit/s) COM2 serial link - male SUB-D 9 - RS232C (rate: 115 kbit/s) USB 2.0 type A (rate: 480 Mbit/s)front panel 4 USB 2.0 type A (rate: 480 Mbit/s)top panel
Port Ethernet	10BASE-T/100BASE-T/1000BASE-T
[Us] rated supply voltage	100...240 V AC power supply
Supply voltage limits	85...265 V
Network frequency	50...60 Hz 47...63 Hz
[In] rated current	1.6 A

Inrush current	40 A
power consumption in W	130 W
Material	Treated steel
Display material	Polyethylene sheet
Fixing mode	Enclosure door: by fixing kit (fasteners included) Panel: by fixing kit (fasteners included)
Type of installation	Indoor
Control type	ON/OFF push-button (equipment ON and OFF) Push-button (reset)
Local signalling	LED (multi-colour) for power LED (yellow) for accessing Flash disk SSD (DISK)
Width	402 mm
Height	301 mm
Depth	104 mm
Cut-out dimensions	383.5 (+ 1/- 0) x 282.5 (+ 1/- 0) x 1.6...10 mm
Net weight	9.48 kg
Main type	Universal

Environment

IP degree of protection	IP65 front panel: conforming to EN/IEC 60529
NEMA degree of protection	NEMA 4X front panel
Product certifications	Marine GL Bridge with line filter HMIYLFIMAR11 CULus 508 CULus CSA 22-2 No 142 CULus HazLoc Class I Division 2 UL 1604 CULus HazLoc Class I Division 2 ANSI/ISA 12-12-01 CULus HazLoc Class I Division 2 CSA 22-2 No 213 GOST CE C-Tick
Pollution degree	2 conforming to EN/IEC 61131-2
Electromagnetic compatibility	Immunity to electromagnetic emissions, class A conforming to EN 55022 Immunity to electromagnetic emissions, class A conforming to EN 55011 Immunity to high frequency interference conforming to EN/IEC 61131-2 Immunity to high frequency interference conforming to EN/IEC 61000-4-x
Ambient air temperature for operation	0...50 °C vertical installation conforming to UL 508 0...50 °C vertical installation conforming to EN/IEC 61131-2
Ambient air temperature for storage	-20...60 °C conforming to IEC 60068-2-2 test Bb -20...60 °C conforming to IEC 60068-2-14 test Na
Relative humidity	10...85 % conforming to EN/IEC 60068-2-78 10...85 % conforming to EN/IEC 60068-2-30
Operating altitude	2000 m conforming to EN/IEC 61131-2
Vibration resistance	1.75 mm (f = 2...9 Hz) continuous conforming to EN/IEC 60068-2-6 Fc 3.5 mm (f = 2...9 Hz) intermittently conforming to EN/IEC 60068-2-6 Fc 0.5 gn (f = 9...200 Hz) continuous conforming to EN/IEC 60068-2-6 Fc 1 gn (f = 9...200 Hz) intermittently conforming to EN/IEC 60068-2-6 Fc 1 mm (f = 3...13.2 Hz) continuous conforming to EN/IEC 60068-2-6 Fc 0.7 gn (f = 13.2...100 Hz) continuous conforming to EN/IEC 60068-2-6 Fc
Shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27, Ea tests

Packing Units

Unit Type of Package 1	PCE
-------------------------------	-----


Number of Units in Package 1	1
Package 1 Height	36.5 cm
Package 1 Width	46 cm
Package 1 Length	56.5 cm
Package 1 Weight	9.48 kg

Contractual warranty

Warranty	18 months
-----------------	-----------

Dimensions Drawings



Dimensions

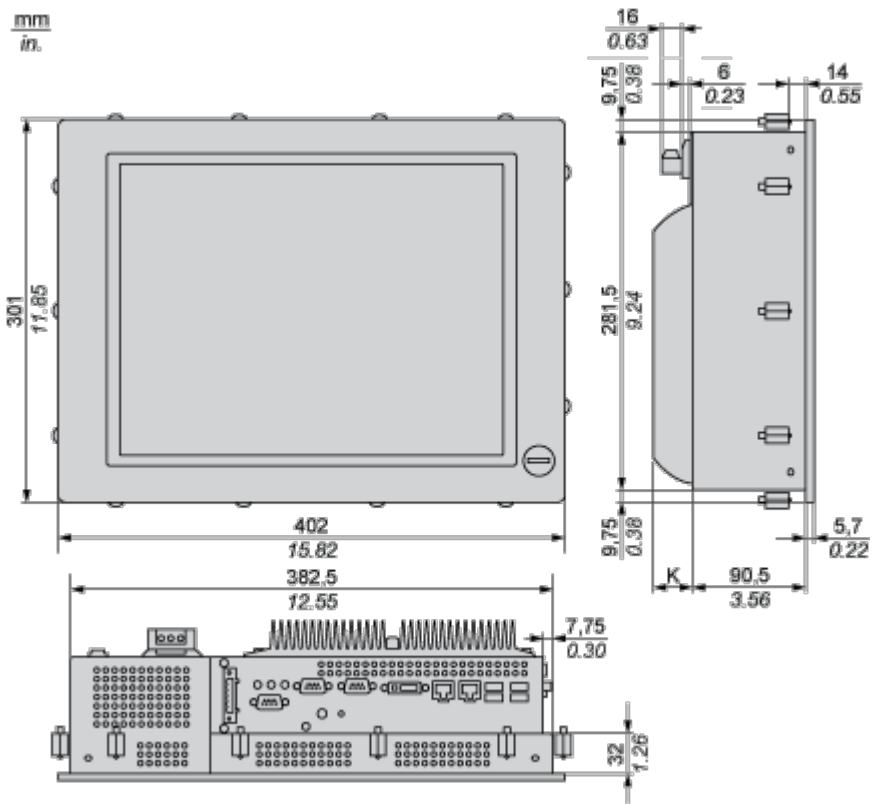


K : 12.8 mm / 0.50 in.

Mounting and Clearance


Spacing Requirements

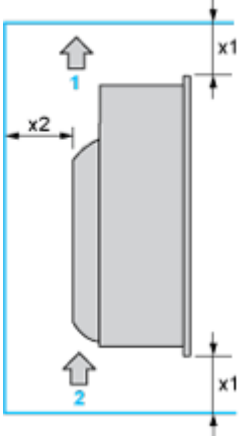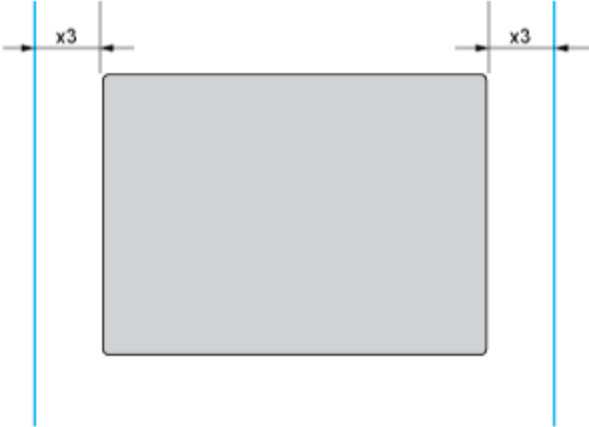Top, Bottom and Rear Sides	Left and Right Sides
 <p>1 Air out 2 Air in</p>	
<p>x1 > 100 mm (3.93 in.) x2 > 50 mm (1.96 in.) x3 > 10 mm (0.39 in.)</p>	

Mounting Orientation

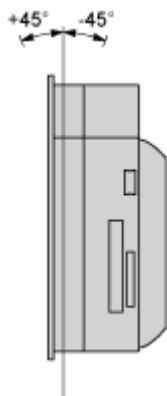

Panel Cut Dimensions

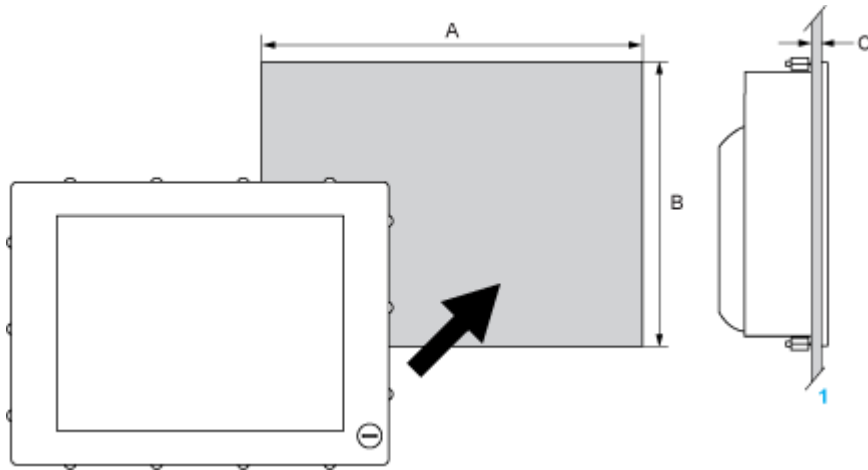

1 Installation panel

A	B	C
383.5 + 1/- 0 mm (15.10 + 0.04/- 0 in.)	282.5 + 1/- 0 mm (11.12 + 0.04/- 0 in.)	1.6...10 mm (0.06...0.39 in.)