

# Product data sheet

Specifications



## Complete beacon, Harmony XVB, indicating 250V 10W + options, clear

XVBL37

**Product availability: Non-Stock - Not normally stocked in distribution facility**

**Price\*: 114.00 USD**

### Main

Range Of Product	Harmony XVB Universal
Product Or Component Type	Complete beacon
Beacon Or Indicator Bank Unit Type	Base unit direct or tube fixing Illuminated unit
Signalling Type	Steady
Mounting Diamete	2.76 in (70 mm)
Component Name	XVBL
Material	Glass reinforced polyamide: base unit Polycarbonate: illuminated unit
Light Source	Bulb not included, clear
Bulb Type	Incandescent BA 15d Protected LED
[Us] Rated Supply Voltage	<= 250 V
Maximum Power Dissipation In W	7 W

### Complementary

Connections - Terminals	Screw clamp terminals, <= 1 x 1.5 mm <sup>2</sup> with cable end
[Ui] Rated Insulation Voltage	250 V IEC 60947-1
Nominal Voltage Limit	0.85...1.1 Un IEC 60947-5-1
[Uimp] Rated Impulse Withstand Voltage	4 kV IEC 60947-1
Cad Overall Width	2.76 in (70 mm)
Cad Overall Height	5.47 in (139 mm)
Cad Overall Depth	2.76 in (70 mm)
Terminals Description Iso N°1	(COM-1)PW (GND)GROUND
Net Weight	0.57 lb(US) (0.26 kg)

### Environment

Pollution Degree	2
Product Certifications	CCC EAC CSA C22-2 No 14 UL 508

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Standards</b>	IEC 60947-5-1
<b>Protective Treatment</b>	TC
<b>Ambient Air Temperature For Operation</b>	-13...122 °F (-25...50 °C) LED -13...158 °F (-25...70 °C) incandescent
<b>Ambient Air Temperature For Storage</b>	-40...158 °F (-40...70 °C)
<b>Electrical Shock Protection Class</b>	Class I on support tube IEC 61140 Class II on base unit IEC 61140
<b>Ip Degree Of Protection</b>	IP65 on fixing base XVBZ0. IEC 60529 IP66 on base unit IEC 60529
<b>Nema Degree Of Protection</b>	Type 4X UL indoor)

## Ordering and shipping details

<b>Category</b>	US100XV22611
<b>Discount Schedule</b>	00XV
<b>Gtin</b>	3389110844160
<b>Returnability</b>	No
<b>Country Of Origin</b>	FR

## Packing Units

<b>Unit Type Of Package 1</b>	PCE
<b>Number Of Units In Package 1</b>	1
<b>Package 1 Height</b>	3.07 in (7.8 cm)
<b>Package 1 Width</b>	5.83 in (14.8 cm)
<b>Package 1 Length</b>	3.23 in (8.2 cm)
<b>Package 1 Weight</b>	9.38 oz (266.0 g)
<b>Unit Type Of Package 2</b>	S03
<b>Number Of Units In Package 2</b>	18
<b>Package 2 Height</b>	11.81 in (30.0 cm)
<b>Package 2 Width</b>	11.81 in (30.0 cm)
<b>Package 2 Length</b>	15.75 in (40.0 cm)
<b>Package 2 Weight</b>	11.45 lb(US) (5.195 kg)

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

## Well-being performance

Mercury Free

Rohs Exemption Information Yes

## Certifications & Standards


Reach Regulation	<a href="#">REACH Declaration</a>
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	No need of specific recycling operations
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

Dimensions Drawings

Illuminated Beacon for BA 15d Bulb or LED

---

Dimensions

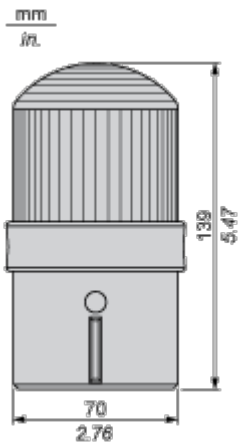

Connections and Schema

Illuminated Beacon

---

Wiring Diagram

